



# LUND UNIVERSITY

## Precision Issues in the implementation of BCJR decoders

Thorén, Karl; Öwall, Viktor; Anderson, John B

*Published in:*  
[Host publication title missing]

*DOI:*  
[10.1109/ISIT.2001.936152](https://doi.org/10.1109/ISIT.2001.936152)

2001

[Link to publication](#)

*Citation for published version (APA):*  
Thorén, K., Öwall, V., & Anderson, J. B. (2001). Precision Issues in the implementation of BCJR decoders. In [Host publication title missing] (pp. 289) <https://doi.org/10.1109/ISIT.2001.936152>

*Total number of authors:*  
3

### General rights

Unless other specific re-use rights are stated the following general rights apply:  
Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00



# Precision Issues in the Implementation of BCJR Decoders

Karl Thorén  
Dept. of Electrosience  
Lund University  
SE-221 00 Lund, Sweden  
karl.thoren@es.lth.se

Viktor Öwall  
Dept. of Electrosience  
Lund University  
SE-221 00 Lund, Sweden  
viktor.owall@es.lth.se

John B. Anderson  
Dept. of Information Technology  
Lund University  
SE-221 00 Lund, Sweden  
anderson@it.lth.se

**Abstract** — The BCJR algorithm is a symbol-by-symbol soft-output MAP decoder for trellis codes. This paper studies the effect of wordlength variations on the BCJR performance and looks at two strategies for reducing the wordlength.

The BCJR algorithm exists in at least two basic versions, the original algorithm for terminated codes and a version for tailbiting codes [1]. We focus on the tailbiting algorithm applied to convolutional codes, although the conclusions here apply to the terminating BCJR and to other trellis codes as well. Both BCJR algorithms are based on two linear vector recursions, one forward through the trellis and one backward. Each recursion has the form of a vector with probabilities that are calculated by a matrix multiplication between the previous vector and a sparse matrix containing transition probabilities of the information channel. Successive vectors decrease in magnitude; in addition, channel errors cause sudden drops in values. This decrease of vector elements is especially critical in the presence of significant noise bursts in the channel.

## I. PRECISION PROBLEMS

Several implementations of the BCJR algorithm have been proposed, including a log-MAP approximate scheme[2] and an analog processor[3]. In a fixed-point hardware implementation of the BCJR decoder, one needs to use a very high precision in the decoder to represent small vector elements. There is a need to scale the numbers to higher values when they get too small.

In a digital design, scaling with powers of 2 is hardware-efficient, since it only applies a bit-shift to the digital word. We have investigated how bit-shifts can be used to reduce the wordlength in the tailbiting BCJR decoder. Some results for the (7,5) rate 1/2 convolutional code are shown in the Table. The entries are the BERs for a channel with  $E_b/N_o = 1$ , with a variety of wordlengths and allowed bit shifts after the vector computation. The shaded areas indicates an almost constant BER. It is clear that scaling via bit shifts greatly reduces the required wordlength needed for a near-optimal BER.

	No. shift	1 bit- shift	2 bit- shifts	3 bit- shifts	No limit
4-bit	49997	49566	36748	32732	32551
8-bit	49997	35510	16341	13683	13277
12-bit	48595	20024	12630	12111	12038
16-bit	36166	13975	12098	12001	11995
32-bit	12090	11993	11992	11992	11992

Table: BERs for bit shift/wordlength combinations

## II. USING ROBUSTNESS TO REDUCE WORDLENGTH

We also find that a decoder optimized for a less noisy channel has higher requirements for precision in the decoder. The noise-bursts in a good channel that make the decoder fail will be so unlikely that the wordlength in the decoder must be huge to represent these probabilities. In its calculations, the algorithm should use a different, poorer  $E_b/N_o$  than the true one, if it can do so without loss of error performance. An issue related to wordlength is thus how sensitive the decoder is to incorrect information about the channel SNR. We have tested several decoders for both the Gaussian channel and the BSC to see how the BER is affected by an incorrect channel  $E_b/N_o$ . The common outcome for all studied cases has been that the decoder has a stable BER across a wide variation of  $E_b/N_o$ .

Since the tailbiting BCJR decoder is robust to incorrect SNR information, we can make a tradeoff between performance and hardware by misrepresenting the channel's SNR to the decoder. Giving the decoder a poorer SNR than is actually the case will reduce its wordlength requirement with only a minor change in error correcting performance. The Figure shows how much the wordlength can be reduced when the true  $E_b/N_o$  is 6 dB but the decoder has been misled to believe the channel has another SNR. Thus, a large precision reduction is possible.

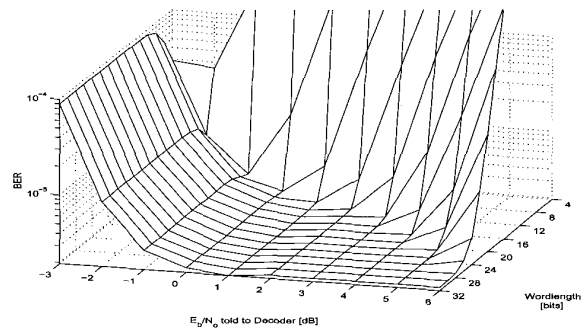


Figure: BERs for wordlength/assumed  $E_b/N_o$  combinations.

## REFERENCES

- [1] J. B. Anderson and S. M. Hladik, "Tailbiting MAP Decoders", *IEEE J. Sel. Areas in Commun.*, Vol. 16, pp. 297-302, Feb 1998.
- [2] P. Robertson, E. Villebrun and P. Hoeher, "A comparison of optimal and sub-optimal MAP decoding algorithms operating in the log domain", *Proc. IEEE Int. Conf. Commun.*, pp. 1009-1013, June 1995.
- [3] J. Hagenauer, "Der analoge decoder", *German Pat. Appl. no. 197 25 275.3*, filed 14 June 1997.