



LUND UNIVERSITY

Critical Moisture Conditions for Mould Growth on Building Materials

Johansson, Pernilla

2008

[Link to publication](#)

Citation for published version (APA):

Johansson, P. (2008). *Critical Moisture Conditions for Mould Growth on Building Materials*. [Licentiate Thesis, Division of Building Physics]. Byggnadsfysik LTH, Lunds Tekniska Högskola.

Total number of authors:

1

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Errata

Critical Moisture Conditions for Mould Growth on Building Materials

Pernilla Johansson, 2012-03-08

Page 12, line 4

Replace $0.98 a_w$ with $0.89 a_w$

Page 12, line 5


Replace (Magan and Lacey, 1984) with (Lacey et al., 1980)

References page 47

”Lacey, J., Hill, S. T., Edwards, M. A. 1980. *Micro-organisms in stored grains: Their enumeration and significance*. Tropical Stored Products Information, 19–33.”

Paper II – page 14

The correct Figure 5a is:

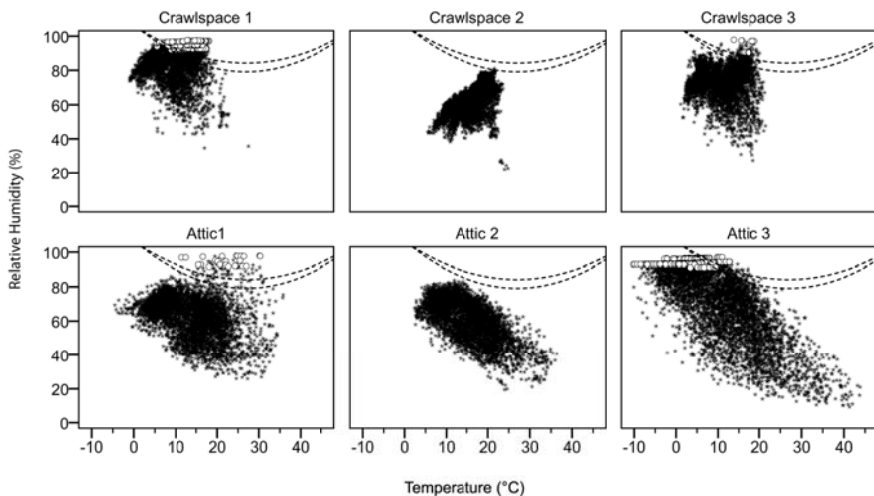

Paper II – page 5

Table 1 Building materials used in the study.

Building material	Description	Range in which the critical moisture level is expected (Johansson et al., unpublished results)	
		22°C	10°C
Pine sapwood	19 mm tongued and grooved board	$75 < RH_{crit} \leq 79$	$85 < RH_{crit} \leq 90$
Plywood	12 mm softwood plywood	$75 < RH_{crit} \leq 79$	$85 < RH_{crit} \leq 90$
Chipboard	12 mm particle board	$79 < RH_{crit} \leq 85$	$90 < RH_{crit} \leq 93$
Thin hardboard	3,2 mm high density hardboard made of wood fibres and lignin	$85 < RH_{crit} \leq 89$	$93 < RH_{crit} \leq 95$
Wet-room gypsum plaster	13 mm gypsum board with cardboard surfaces	$89 < RH_{crit} \leq 95$	$95 < RH_{crit}$
Exterior gypsum plaster	13 mm gypsum board with cardboard surfaces	$89 < RH_{crit} \leq 95$	$95 < RH_{crit}$
Asphalt paper	1,5 mm windproof barrier of asphalt-impregnated cellulose paper	$89 < RH_{crit} \leq 95$	$95 < RH_{crit}$
Cement-based board	8 mm cement based board consisting of cement, limestone and cellulose fibers, covered with a plastic dispersion	$95 < RH_{crit}$	$95 < RH_{crit}$
Glassfibre board	15 mm rigid glass wool insulation board	$95 < RH_{crit}$	$95 < RH_{crit}$
Expanded polystyrene board	50 mm expanded polystyrene insulation board	$95 < RH_{crit}$	$95 < RH_{crit}$