



LUND UNIVERSITY

Selective broadcast for VANET safety applications

Bür, Kaan; Kihl, Maria

2011

Document Version:

Peer reviewed version (aka post-print)

[Link to publication](#)

Citation for published version (APA):

Bür, K., & Kihl, M. (2011). *Selective broadcast for VANET safety applications*. Abstract from SNOW - the 2nd Nordic Workshop on System and Network Optimization for Wireless, Sälen, Sweden.

Total number of authors:

2

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Selective Broadcast for VANET Safety Applications

Kaan Bür, Maria Kihl

Emergency situation warning is one of the most popular potential applications for vehicular ad hoc networks (VANET). Due to their life-critical nature, however, they must meet very high quality standards, such as reliable and timely delivery of the safety warning in a situation like car collision avoidance. In order to put the candidate solutions to the test, we implement four different selective broadcast algorithms used for information dissemination in VANET, and analyse their delivery performance under identical and realistic simulation conditions. The results we obtain help us to understand better the design requirements of a high-performance selective broadcast algorithm.

EVALUATION SCENARIO

In order to evaluate the effectiveness of selective broadcast in vehicular safety applications, we implemented 4 different algorithms based on the ideas in [1], [4], [3]. These algorithms, upon encountering an emergency situation, initiate a periodic broadcast sequence and start sending warning messages. Upon receiving a warning message, other vehicles start their own periodic broadcast sequence provided that the warning comes from a vehicle in front of them. The difference between the algorithms lies in their stopping conditions and random waiting times before transmission. As our tool for discrete event simulation, we have chosen ns-3 [2]. We ran the simulations 100 times with different random number seeds for each algorithm described above and each different value of the chosen variable.

Table I
SIMULATION PARAMETERS

| Description | Value |
|---|---------------------|
| Number of vehicles (<i>variable</i>) | 20, 40 .. 100 |
| Wireless transmission range | 300 m |
| Emergency warning message size | 100 B |
| Emergency warning message interval | 100 ms |
| Wait-before-send time (<i>minimum .. maximum</i>) | 0 ms .. 10 ms |
| Vehicle speed (<i>minimum .. maximum</i>) | 60 km/h .. 120 km/h |
| Deceleration rate | 4 m/s ² |
| Driver reaction time | 1.6 s |

RESULTS AND CONCLUSION

The effectiveness metric is defined as the percentage of the vehicles having received the collision warning while their

Kaan Bür {kaan.bur@eit.lth.se} and Maria Kihl {maria.kihl@eit.lth.se} are with Department of Electrical and Information Technology, Lund University, P.O. Box 118, SE-221 00 Lund, Sweden.

This work is partly funded by Excellence Center at Linköping-Lund in Information Technology (eLLIIT). Kaan Bür and Maria Kihl are members of Lund Center for Control of Complex Engineering Systems (LCCC), a Linnaeus Center at Lund University, funded by the Swedish Research Council. Maria Kihl is partly funded by the VINNMER program at the Swedish Governmental Agency for Innovation Systems (VINNOVA).

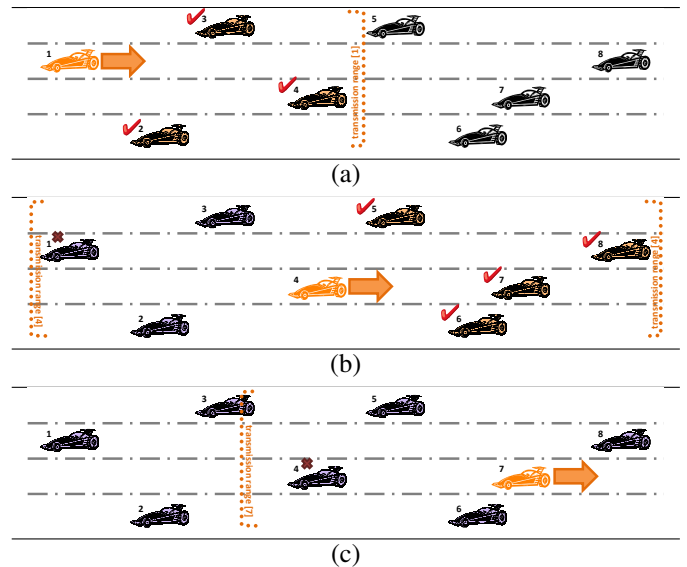


Figure 1. An example showing, in 3 snapshots from a highway with 4 lanes and 8 cars, how selective broadcast works: (a) Periodical emergency warning broadcast is initiated by car 1. The warning is received by cars 2, 3, 4. (b) Car 4 propagates the message. Car 1 overhears this and cancels its own broadcast sequence. Cars 5, 6, 7, 8 receive the warning. (c) Car 7 propagates the message. Car 4 overhears it and cancels its own sequence.

distance to the accident is still sufficient to stop in time. According to the simulation results, all 4 algorithms suffer from network disconnectivity when the density of nodes is not high enough to propagate and keep alive the warning. The successful delivery rate can be as low as 0.5 in sparse networks. As the network density increases, the success rate exceeds 0.9. The results show that much work remains to be done to realise safety applications with 100% reliability, so they can be widely and safely used in vehicles. It is necessary, for instance, to study adaptive broadcast techniques to overcome the problem of sparse networks. More accurate mobility models can be incorporated into the simulations, containing elements for changing lanes, keeping the safety distance, platooning, and driver behaviour. Our research plan for the near future is to address these issues.

REFERENCES

- [1] S. Biswas, R. Tatchikou, F. Dion, "Vehicle-to-Vehicle Wireless Communication Protocols for Enhancing Highway Traffic Safety", *IEEE Communications Magazine*, Vol. 44, No. 1, pp. 74-82, January 2006.
- [2] The ns-3 network simulator, available online at <http://www.nsnam.org>, last accessed 27 August 2010.
- [3] L. Briesemeister, G. Hommel, "Role-based Multicast in Highly Mobile but Sparsely Connected Ad Hoc Networks", *Proceedings of Mobile and Ad Hoc Networking and Computing*, pp. 45-50, Boston, USA, 11 August 2000.
- [4] M. Nekovee, "Epidemic Algorithms for Reliable and Efficient Information Dissemination in Vehicular Ad Hoc Networks", *IET Intelligent Transportation Systems*, Vol. 3, No. 2, pp. 104-110, June 2009.