

# Doubly ionized thorium: Laser lifetime measurements and transition probability determination of interest in cosmochronology

Biemont, E; Palmeri, P; Quinet, P; Zhang, Zhiguo; Svanberg, Sune

Published in: Astrophysical Journal

DOI: 10.1086/338700

2002

## Link to publication

Citation for published version (APA):

Biemont, E., Palmeri, P., Quinet, P., Zhang, Z., & Svanberg, S. (2002). Doubly ionized thorium: Laser lifetime measurements and transition probability determination of interest in cosmochronology. Astrophysical Journal, 567(2), 1276-1283. https://doi.org/10.1086/338700

Total number of authors:

# General rights

Unless other specific re-use rights are stated the following general rights apply: Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights

- Users may download and print one copy of any publication from the public portal for the purpose of private study
- You may not further distribute the material or use it for any profit-making activity or commercial gain
  You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: https://creativecommons.org/licenses/

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Download date: 17. Dec. 2025

# DOUBLY IONIZED THORIUM: LASER LIFETIME MEASUREMENTS AND TRANSITION PROBABILITY DETERMINATION OF INTEREST IN COSMOCHRONOLOGY

E. BIÉMONT, 1,2 P. PALMERI, P. QUINET, 1,2 Z. G. ZHANG, AND S. SVANBERG Received 2001 August 7; accepted 2001 November 15

#### ABSTRACT

The first lifetime measurements have been performed for six levels of doubly ionized thorium, an important cosmochronometer in astrophysics for estimating the age of the Galaxy. The levels, belonging to the  $5f^2$ , 5f7p, 7s7p, and 6d7p configurations of Th III, have been measured by the time-resolved laser-induced fluorescence method and compared with relativistic Hartree-Fock calculations including configuration interaction and core-polarization effects. Taking advantage of the excellent agreement between theory and experiment, a first set of transition probabilities of astrophysical interest has been deduced for this ion from a combination of the experimental lifetimes and of the theoretical branching fractions.

Subject headings: atomic data — line: identification — methods: laboratory — stars: peculiar

#### 1. INTRODUCTION

Doubly ionized thorium (Th III) has a complex electronic structure, and its ground state is  $5f6d^3H_4^o$ . Among the 12 isotopes and isomers of thorium, only  $^{232}$ Th, which is characterized by a half-life of 14.05 Gyr, occurs in the solar system. The other isotopes are short lived, with the exception of  $^{230}$ Th, which has a half-life of  $8 \times 10^4$  yr.

In astrophysics, the age of a star can be determined by the use of a radioactive isotope of sufficiently long lifetime, and two such isotopes are frequently considered in cosmochronology: <sup>232</sup>Th and <sup>238</sup>U, which has a half-life of 4.47 Gyr. The abundance patterns in metal-poor halo stars, which are very old, provide some records of the first generations of Galactic nucleosynthesis.

Thorium has frequently been used in the past as a cosmochronometer because its most intense transition (Th  $\pi$ ) at 401.9 nm is rather easily accessible (visible range). It has been detected, e.g., in the ultra-metal-poor halo star CS 22892-052 (Sneden et al. 1994, 1996; Cowan et al. 1997) in the framework of the investigation of the third r-process peak elements in some halo stars with the *Hubble Space Telescope* (HST), the long-lived radioactive nuclei being formed entirely in the r-process and being used to determine the age of the stars and of the Galaxy.

Among the long-lived isotopes considered in the literature, let us mention that Butcher (1987) proposed using the <sup>232</sup>Th and Nd elements to derive an age for the Galactic disk, the most abundant isotopes of Nd, taken as references, being stable. The consideration of the Th/Eu spectral line ratios for the determination of the age of the Galaxy (see, e.g., François, Spite, & Spite 1993) has also motivated recent efforts in the laboratory to improve our knowledge of the relevant atomic data.

These efforts, however, have been concentrated on singly ionized elements, one obvious reason being that doubly ionized atoms are more difficult to produce in the laboratory; also, knowledge of their spectra is generally more

fragmentary (see, e.g., the relevant compilations provided by the NIST<sup>4</sup> and also Blaise & Wyart 1992).

Up to now, no Th III transitions have been considered in cosmochronology, mainly because of the complete lack of atomic data regarding the transition probabilities for this ion. Th III has been marginally identified in some stellar spectra (see below), but the identifications were mostly based on wavelength coincidences. Systematic identification and quantitative abundance analyses have been prevented by the lack of oscillator strengths for this ion.

This justifies the first systematic work that is reported in the present paper. More concretely, the first set of transition probabilities has been deduced from a combination of laser lifetime measurements in a laser-produced plasma and configuration interaction calculations including relativistic and core-polarization (CP) effects.

#### 2. EXPERIMENTAL SETUP

The lifetimes of six levels of Th III were measured in the present work, with the time-resolved laser-induced fluorescence technique. They have been excited according to the schemes summarized in Table 1.

The experimental setup used in our experiment is illustrated in Figure 1. Th<sup>2+</sup> ions were produced in a laserinduced plasma using 532 nm wavelength laser pulses emitted from a 10 Hz repetition rate and 10 ns duration Nd:YAG laser (continuum Surelite) with variable pulse energy. Pulse energies in the range 2-10 mJ were normally used. The pulses were focused on the surface of a Th foil rotating in a vacuum chamber. In order to obtain the required excitation, 8 ns pulses emitted by another Nd:YAG laser (continuum NY-82) were sent to a stimulated Brillouin scattering (SBS) compressor to shorten the pulses down to 1 ns. The laser was used to pump a dye laser (Continuum Nd-60), and the DCM dye was used in the experiments. According to the excitation requirements, the second- or third-order harmonics of the dye laser were obtained employing a nonlinear optical system, including a KDP crystal, a retarding plate, and a BBO crystal, and they were used to populate three measured levels. Three additional measured levels were excited by the Raman-shifted components of the harmonics, obtained in a cell with

<sup>&</sup>lt;sup>1</sup> IPNAS, Bât. B 15, Université de Liège, Sart Tilman, B-4000 Liège, Belgium.

<sup>&</sup>lt;sup>2</sup> Astrophysique et Spectroscopie, Université de Mons-Hainaut, B-7000 Mons, Belgium.

<sup>&</sup>lt;sup>3</sup> Department of Physics, Lund Institute of Technology, P.O. Box 118, S-221 00 Lund, Sweden.

<sup>&</sup>lt;sup>4</sup> See http://physics.nist.gov/PhysRefData/contents.html.

 $\label{table 1} TABLE\ 1$  Th III Levels Measured and the Corresponding Excitation Schemes

Measured Le	VEL					
State <sup>a</sup> Energy (cm <sup>-1</sup> )		Lower Level (cm <sup>-1</sup> )	$\lambda_{ m exc}$ (AIR) (nm)	EXCITATION SCHEME <sup>b</sup>	$\lambda_{obs}$ (AIR) (nm)	
$5f^2 {}^3P {}_2$	32867.274	510.758	308.967	2v	508.5	
$5f7p (7/2, 1/2)_4 \dots$	38580.600	3188.301	282.464	2v + AS	309.8	
$7s7p^{-3}P_0^o$	42259.714	5523.881	272.133	2v + AS	272.1	
$7s7p^{-3}P_1^o$	45063.970	4676.432	247.526	2v + 2AS	246.4	
$6d7p (5/2, 3/2)_4^o \dots$	53052.47	6537.815	214.918	3v	232.5	
$6d7p (5/2, 3/2)_2^o \dots$	53151.57	4056.020	203.619	3v	234.1	

Note.—AS means anti-Stokes component, and 2AS is written for second anti-Stokes component.

hydrogen at 10 bars when the harmonics were focused into the cell. In the experiments, the excitation light was isolated with a CaF<sub>2</sub> Pellin-Broca prism and focused by two CaF<sub>2</sub> lenses at a distance of about 1 cm above the foil. The two Nd:YAG lasers were triggered by a digital delay generator (Stanford Research System, model 535) and the delay between the ablation and excitation pulses was adjusted by

the generator. The ions produced by the ablation pulse were excited selectively by the excitation laser beam crossing the plasma horizontally. The fluorescence, decaying from the excited levels, was imaged by two  ${\rm CaF}_2$  lenses and concentrated on the entrance slit of a vacuum monochromator. A Hamamatsu R3809U-58 photomultiplier was used for the detection.

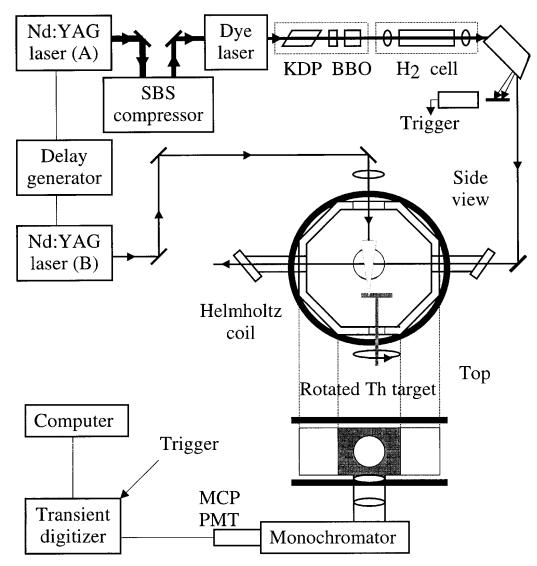


Fig. 1.—Experimental setup used in the Th III lifetime measurements

<sup>&</sup>lt;sup>a</sup> From Blaise & Wyart 1992.

<sup>&</sup>lt;sup>b</sup> 2v means frequency doubling and 3v frequency tripling.

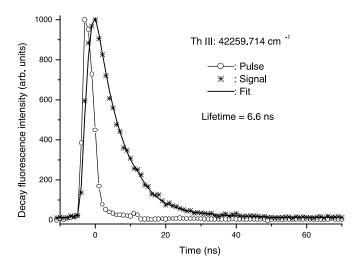


Fig. 2.—Typical experimental time-resolved fluorescence signal from the level at  $42259.714~\rm cm^{-1}$  in Th III. The lifetime deduced from the fit was  $6.6~\rm ns$ .

The time-resolved signal was recorded and averaged with a digital transient recorder (Tektronix model DSA 602), and the fluorescence decay curve was sent to a personal computer for lifetime determination. The lifetime evaluation was performed by fitting the recorded time-resolved curve from the measured level with a convolution of the time-resolved laser pulse curve and an exponential curve with adjustable parameters. The evaluation procedure has been described and tested in a previous work carried out in our laboratory (Li et al. 2000).

In order to be sure that the  $Th^{2+}$  transitions of interest were indeed studied, the modification of the fluorescence signal as a function of the delay time was investigated, the occurrence of a maximum fluorescence signal appearing at shorter delay times for  $Th \, III$  than for  $Th \, II$  and  $Th \, III$  ions. Possible flight-out-of-view effects were eliminated by enlarging the slit of the monochromator.

In order to avoid the recombination of the ions and electrons during the ablation process, a magnetic field was added in the plasma zone by a pair of Helmholtz coils. It was observed that the laser-induced fluorescence signal disappeared when the field was switched off and that the recombination light was strongly reduced when a field at about 100 G was applied.

In order to obtain a sufficiently high signal-to-noise ratio, a decay curve was obtained by averaging fluorescence photons from more than 2000 pulses. A typical decay curve is shown in Figure 2.

For each level measured, 6-9 fluorescence decay curves were recorded under different experimental conditions, where the delay time and intensities of the ablation and excitation laser pulses were varied. Thus, the measurements were performed for different concentrations and temperatures of the plasma. The evaluated lifetimes from the curves were found to be well coincident. This showed that there were neither saturation effects nor reabsorption or collisional effects occurring, and the final result was formed by averaging these lifetimes. The six lifetimes measured are reported in the last column of Table 2. The error bars reflect not only the statistical scattering, but also a conservative estimate of the possible remaining systematic errors. Thus, 0.2 ns was considered as an minimum error bar for any lifetimes of less than 2 ns, and any error bar must be larger than 5% for measured lifetimes of more than 2 ns, even if the statistical scattering is much less than 5% of the measured lifetimes.

#### 3. HARTREE-FOCK CALCULATIONS IN TH III

The Th III spectrum was first analyzed by de Bruin & Klinkenberg (1940). Their analysis led to the subsequent publication by Klinkenberg (1950) of a comprehensive description of the spectrum of this ion. Based on infrared observations, Litzén (1974) was able to determine the position of  $6d^2 {}^3F_2$  relative to the ground state  $5f6d {}^3H_4^o$ . Additional level values and the ionization limit were derived by Wyart & Kaufman (1981) from sliding-spark spectra in the ultraviolet region. The first parametric study was performed by Racah (1950) and reconsidered by Blaise & Wyart (1992) for inclusion in their compilation on the energy levels of the actinides. This compilation (Blaise & Wyart 1992) contains 82 odd and 93 even levels belonging to the 5f6d, 5f7s, 6d7p, 7s7p, 5f8s, 5f7d, 6d6f; and  $6d^2$ , 6d7s,  $7s^2$ ,  $5f^2$ , 5f7p, 6d7d, 5f8p, 5f6f, and 5f8p configurations, respectively. The NIST database<sup>5</sup> lists only 34 transitions in the range 188.812 and 810.514 nm. The energy levels of Blaise & Wyart's compilation were retained for the fitting procedure of the present calculation (see below). The energies and the designations of the levels involved in the present work are summarized in Table 3 for both parities ( $E < 85,000 \text{ cm}^{-1}$ ).

 ${\it TABLE~2}$  Calculated and Experimental Lifetimes in Th III as Obtained in This Work

Measured Le	VEL		Libert	ME (ns)		
State <sup>a</sup> (1)	Energy (cm <sup>-1</sup> ) (2)	A (3)	B (4)	C (5)	D (6)	Experiment (7)
$5f^2 {}^3P_2 \dots \dots$	32867.274	11.2	38.3	23.9	23.7	25.8 ± 1.5
$5f7p(7/2, 1/2)_4$	38580.600	2.0	2.6	2.6	2.6	$2.7 \pm 0.2$
$7s7p^{-3}P_0^o$	42259.714	5.1	6.9	5.6	7.3	$6.6 \pm 0.4$
$7s7p^{-3}P_1^o$	45063.970	2.5	3.4	2.2	2.9	$2.4 \pm 0.2$
$6d7p (5/2, 3/2)_4^o \dots$	53052.47	1.0	1.5	1.0	1.4	$1.3 \pm 0.2$
$6d7p (5/2, 3/2)_2^o \dots$	53151.57	2.4	3.2	2.4	3.2	$3.1 \pm 0.2$

Note.—Columns (3)–(6) give HFR calculations A, B, C, and D, respectively (see text).

<sup>&</sup>lt;sup>5</sup> Available at: http://physics.nist.gov/PhysRefData/contents.html.

<sup>&</sup>lt;sup>a</sup> From Blaise & Wyart 1992.

 $\begin{tabular}{ll} TABLE & 3 \\ Energy Level Values (in $cm^{-1}$) of $Th$ iii from Blaise & Wyart (1992) \\ \end{tabular}$ 

	Odd Parity				Even Parity		
Configuration	Designation	J	Energy	Configuration	Designation	J	Energy
5f6d	$^3H^o$	4	0.000	$6d^2 \dots \dots$	<sup>3</sup> F	2	63.267
5f6d	$^3F^{o}$	2	510.758	$6d^2$	$^{3}F$	3	4056.020
5f7s		3	2527.095	$6d^2$		2	4676.432
5 <i>f</i> 7 <i>s</i>	$^3F^o$	2	3181.502	$6d^2$	<sup>3</sup> <i>P</i>	0	5090.057
5f6d	3 ***	4	3188.301	6d7s	<sup>3</sup> D	1	5523.881
5f6d	$^3H^o$	5	4489.641	$6d^2 \dots \dots \dots \dots$	$^{3}F$ $^{3}D$	4	6537.815
5f6d	$^3G^o$	3	4826.826 5060.544	$6d7s \dots \dots$	³ <i>D</i> ³ <i>P</i>	2 1	7176.107 7875.827
5f6d 5f6d	G	2	6288.221	6d7s	. Р 3 <b>D</b>	3	9953.580
5 <i>f</i> 7 <i>s</i>	$^{3}F^{o}$	4	6310.807	$6d^2 \dots \dots$	3 <b>P</b>	2	10440.240
5f7s	•	3	7500.605	$6d^2 \dots \dots \dots$	$^{1}G$	4	10542.898
5f6d	$^3D^o$	1	7921.088	$7s^2$	$^{1}S$	0	11961.133
5f6d	$^3G^o$	4	8141.749	5 <i>f</i> <sup>2</sup>	$^{3}H$	4	15148.519
5f6d	$^3H^o$	6	8436.824	6d7s	$^{1}D$	2	16037.641
5f6d		4	8980.557	$5f^2$	$^{3}H$	5	17887.409
5f6d	$^{3}D^{o}$	2	10180.766	$5f^2$	$^3F$	2	18863.869
5f6d	$^{3}D^{o}$	3	10741.150	$6d^2$		0	18993.313
5f6d	${}^{3}P^{o}$	1	11123.179	$5f^2$	<sup>3</sup> <i>H</i>	6	20770.895
5f6d	${}^{3}P^{o}$	0	11232.615	$5f^2$	<sup>3</sup> F	3	20840.488
5f6d	<sup>3</sup> <i>G</i> <sup>o</sup> <sup>3</sup> <i>P</i> o	5	11276.807	$5f^2$	$^{3}F$	4	21783.869
5f6d	${}^{1}F^{o}$	2	13208.214 15453.411	$5f^2 \dots \dots$	$^{1}G$ $^{1}D$	4 2	25972.172 28232.502
5f6d 5f6d	$^{1}H^{o}$	5	19009.908	$5f^2$	$^{1}I$	6	28349.961
5f6d	$^{11}P^o$	1	20710.949	$5f^2$	3 <b>P</b>	0	29299.515
6d7p	$(3/2, 1/2)^o$	2	37280.229	5 <i>f</i> 2	<sup>3</sup> P	1	30402.855
6d7p	$(3/2, 1/2)^o$	1	39280.863	5 <i>f</i> <sup>2</sup>	$^{3}P$	2	32867.274
$7s7p\dots$	$^{3}P^{o}$	0	42259.714	5f7p	(5/2, 1/2)	3	33562.349
6d7p	$(5/2, 1/2)^o$	2	44088.281	5f7p	(5/2, 1/2)	2	34996.087
6d7p	$(5/2, 1/2)^o$	3	44464.958	5 <i>f</i> 7 <i>p</i>	(7/2, 1/2)	3	38431.640
$7s7p\dots$	$^{3}P^{o}$	1	45063.97	5 <i>f</i> 7 <i>p</i>	(7/2, 1/2)	4	38580.600
$6d7p \dots 6d7p$	$(3/2, 3/2)^o$	2	47679.97	5 <i>f</i> 7 <i>p</i>	(5/2, 3/2)	3	42313.055
6d7p	$(3/2, 3/2)^o$	3	49980.67	5f7p	(5/2, 3/2)	4	43701.665
6d7p	$(3/2, 3/2)^o$	1	50992.57	5f7p	(5/2, 3/2)	2	43759.222
6d7p	$(3/2, 3/2)^o$	0	51745.37	5f7p	(5/2, 3/2)	1	44603.100
6d7p	$(5/2, 3/2)^o$	4 2	53052.47 53151.57	5f7p	(7/2, 3/2)	4 5	47261.099 47421.939
6d7p	$(5/2, 3/2)^o$	1	53939.27	5f7p 5f7p	(7/2, 3/2) (7/2, 3/2)	3	47421.939
$7s7p\dots$	${}^{3}P^{o}$	2	55399.07	5f7p	(7/2, 3/2) $(7/2, 3/2)$	2	49805.94
6d7p	$(5/2, 3/2)^o$	3	55552.37	$5f^2$	1 <sub>S</sub>	0	51161.63
$7s7p\dots$	$^{1}P^{o}$	1	69001.00	6d8s	${}^{3}D$	1	81706.37
5f 8s	$(5/2, 1/2)^o$	2	74644.27	6d7d	(3/2, 3/2)	1	83358.66
5 <i>f</i> 8 <i>s</i>	$(5/2, 1/2)^o$	3	74784.31	6d7d	(3/2, 3/2)	3	83702.11
5 <i>f</i> 7 <i>d</i>	$(5/2, 3/2)^o$	3	78327.71				
5 <i>f</i> 7 <i>d</i>	$(5/2, 3/2)^o$	2	78332.73				
5f7d	$(5/2, 3/2)^o$	4	78417.26				
5f 8s	$(7/2, 1/2)^o$	4	78929.56				
5f 8s	$(7/2, 1/2)^o$	3	79082.84				
5f7d	$(5/2, 5/2)^o$	4	79329.56				
5f7d	$(5/2, 3/2)^o$	1	79484.15 79646.36				
5f7d 5f7d	$(5/2, 5/2)^{o}$ $(5/2, 5/2)^{o}$	3 2	79040.30				
5f7d	$(5/2, 5/2)^{\circ}$ $(5/2, 5/2)^{\circ}$	5	80137.22				
5f7d	$(5/2, 5/2)^o$	1	80784.25				
5f7d	$(5/2, 5/2)^{\circ}$	0	80906.30				
5f7d	$(7/2, 3/2)^o$	4	82348.62				
5f7d	$(7/2, 3/2)^o$	3	82827.05				
5f7d	$(7/2, 3/2)^o$	5	83023.21				
5f7d	$(7/2, 3/2)^o$	2	83237.74				
5 <i>f</i> 7 <i>d</i>	$(7/2, 5/2)^o$	4	83552.91				
5 <i>f</i> 7 <i>d</i>	$(7/2, 5/2)^o$	6	83962.90				
5 <i>f</i> 7 <i>d</i>	$(7/2, 5/2)^o$	5	84239.02				
5f7d	$(7/2, 5/2)^o$	3	84374.16				
5f7d	$(7/2, 5/2)^o$	2	84532.54				

Note.—Energies less than 85,000 cm  $^{-1}$  only are quoted.

 ${\it TABLE~4}$  Th III Transitions Depopulating the Levels for which the Radiative Lifetimes Have Been Measured in the Present Work

188.3654		I	ower Lev	EL	Ţ	Upper Level			
188.3654			Donitor	I Walaa		Danita	I Walaa	- 48	CF <sup>b</sup>
203.6190.	(nm)	(cm -)	Parity	J value	(cm <sup>-</sup> )	Parity	J value	gA"	CF°
2040309			e			o		7.97E + 06	-0.008
206.2254. 4676 c 2.0 53152 o 2.0 1.39E+08 208.8953. 5524 e 1.0 53152 o 2.0 2.35E+05 214.9184. 6538 c 4.0 53052 o 4.0 1.45E+09 217.4392. 7176 c 2.0 53152 o 2.0 4.0 1.45E+09 217.4392. 7176 c 2.0 53152 o 2.0 4.0 1.45E+09 222.1496. 63 c 2.0 45064 o 1.0 1.44E+08 231.4211. 9954 c 3.0 53152 o 2.0 2.0 1.05E+08 231.4211. 9954 c 3.0 53152 o 2.0 4.0 5.20E+09 231.9533. 9954 c 3.0 53152 o 2.0 4.0 5.20E+09 231.9533. 9954 c 3.0 53052 o 4.0 5.20E+09 2351.692. 10543 c 4.0 53052 o 4.0 5.00E+08 247.5263. 4676 e 2.0 45064 o 1.0 5.07E+08 250.0878. 5090 c 0.0 45064 o 1.0 5.07E+08 252.8319. 5524 e 1.0 45064 o 1.0 5.07E+08 263.8581. 7176 e 2.0 45064 o 1.0 450E+07 268.8231. 7876 e 1.0 45064 o 1.0 400E+08 268.8231. 7876 e 1.0 45064 o 1.0 400E+08 268.8331. 7876 e 1.0 45064 o 1.0 400E+08 268.8331. 7876 e 1.0 45064 o 1.0 400E+08 269.3607. 16038 e 2.0 53152 o 2.0 5.71E+07 269.3607. 16038 e 2.0 53152 o 0.0 1.32E+08 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 282.4642. 3188 o 4.0 38581 e 4.0 8.45E+06 293.2471. 4490 o 5.0 38581 e 4.0 8.45E+06 293.2471. 4490 o 5.0 38581 e 4.0 8.45E+06 293.2471. 4490 o 5.0 38581 e 4.0 7.36E+07 293.2471. 4490 o 5.0 38581 e 4.0 5.00 1.0 4.00E+08 293.2471. 4490 o 5.0 38581 e 4.0 5.00E+07 293.2471. 4490 o 5.0 38581 e 4.0 6.6E+0.8 309.7974. 6311 o 4.0 38581 e 4.0 7.36E+07 309.7974. 6311 o 4.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 4.75E+07 309.4418. 5061 o 3.0 38581 e 4.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5.0 5									0.464
209.8953.									-0.740
214,9184									-0.056
217.4392 7176									-0.001 $-0.743$
220,8000									0.016
221.1496									-0.191
231.4211 9954 e 3.0 \$3152 o 2.0 \$1.05E+08 — 231.9533 9954 e 3.0 \$3052 o 4.0 \$5.20E+09 d 232.31.9533 9954 e 3.0 \$53052 o 4.0 \$5.20E+09 d 247.5263 4676 e 2.0 \$45064 o 1.0 \$5.07E+08 d 247.5263 4676 e 2.0 \$45064 o 1.0 \$5.07E+08 d 252.8319 \$5524 e 1.0 \$45064 o 1.0 \$5.97E+08 d 252.8319 \$5524 e 1.0 \$45064 o 1.0 \$5.97E+07 d 252.8319 \$5524 e 1.0 \$45064 o 1.0 \$5.9E+07 d 252.8319 \$5524 e 1.0 \$45064 o 1.0 \$5.9E+07 d 252.8319 \$5524 e 1.0 \$45064 o 1.0 \$5.9E+07 d 263.8581 \$7176 e 2.0 \$45064 o 1.0 \$4.00E+08 d 263.8581 \$7176 e 2.0 \$45064 o 1.0 \$4.00E+08 d 268.8231 \$7876 e 1.0 \$45064 o 1.0 \$4.00E+08 d 269.3607 \$16088 e 2.0 \$3152 o 2.0 \$5.71E+07 d 272.3332 \$5524 e 1.0 \$42260 o 0.0 \$1.32E+08 d 272.3332 \$5524 e 1.0 \$42260 o 0.0 \$1.32E+08 d 272.3332 \$5524 e 1.0 \$42260 o 0.0 \$1.32E+08 d 272.3332 \$5524 e 1.0 \$42260 o 0.0 \$1.32E+08 d 272.3332 \$5524 e 1.0 \$42260 o 0.0 \$1.32E+08 d 272.3332 \$4524 e 2.0 \$3152 o 2.0 \$5.71E+07 d 272.3332 \$4524 e 2.0 \$3152 o 2.0 \$1.61E+07 d 272.3332 \$4524 e 2.0 \$3152 o 2.0 \$1.61E+07 d 272.33471 \$4490 o 5.0 \$38381 e 4.0 \$3.77E+08 d 272.32471 \$4490 o 5.0 \$3.83881 e 4.0 \$3.77E+08 d 272.32471 \$4490 o 5.0 \$3.83881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.83881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.83881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.83881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o 5.0 \$3.0 \$3881 e 4.0 \$7.36E+07 d 272.32471 \$4490 o									0.202
235.1692. 10543 e 4.0 53052 o 4.0 2.70E+08 — 247.5263 4676 e 2.0 45064 o 1.0 5.0TE+08 — 247.5263 4676 e 2.0 45064 o 1.0 5.0TE+08 — 252.8319. 5524 e 1.0 45064 o 1.0 3.59E+07 — 259.1201. 0 o 0 0 4.0 38581 e 4.0 1.09E+07 — 263.7461. 15149 e 4.0 53052 o 4.0 1.52E+06 = 263.8581. 7176 e 2.0 45064 o 1.0 4.00E+08 — 263.8581. 7176 e 1.0 45064 o 1.0 4.00E+08 — 268.8231. 7876 e 1.0 45064 o 1.0 4.00E+08 — 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 — 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 — 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 — 272.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 — 282.4642. 3188 o 4.0 38581 e 4.0 8.45E+06 — 293.2471. 4490 o 5.0 38581 e 4.0 3.77E+08 — 293.2471. 4490 o 5.0 38581 e 4.0 3.77E+08 — 293.2471. 4490 o 5.0 38581 e 4.0 6.64E+08 — 298.2418. 5061 o 3.0 38581 e 4.0 4.7.36E+07 — 302.0009. 11961 e 0.0 45064 o 1.0 5.30E+07 — 309.4015. 20840 e 3.0 53152 o 2.0 1.73E+07 — 309.4015. 20840 e 3.0 53152 o 2.0 1.73E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.7.36E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.7.36E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.7.36E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.7.36E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.7.56E+07 — 309.97974. 6311 o 4.0 38581 e 4.0 4.0 5.94E+06 — 308.97974. 6311 o 4.0 38581 e 4.0 4.0 5.94E+06 — 308.97974 a 6311 o 4.0 38581 e 4.0 4.0 5.94E+06 — 309.97974. 6311 o 4.0 38581 e 4.0 4.0 5.94E+06 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.97974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309									-0.027
247,5263.	231.9533	9954	e	3.0	53052	o	4.0	5.20E + 09	0.839
250.0878. 5090 e 0.0 45064 o 1.0 8.69E+06 — 2528.319. 5524 e 1.0 45064 o 1.0 3.59E+07 — 25289.1201. 0 o 4.0 38581 e 4.0 1.09E+07 — 263.7461. 15149 e 4.0 53052 o 4.0 1.52E+06 6.263.8581. 7176 e 2.0 45064 o 1.0 4.00E+08 — 268.8231. 7876 e 1.0 45064 o 1.0 4.00E+08 — 269.3607. 16038 e 2.0 53152 o 2.0 5.71E+07 — 2727.1332. 5524 e 1.0 42260 o 0.0 1.32E+08 — 277.2837. 2527 o 3.0 38581 e 4.0 8.45E+06 — 282.4642. 3188 o 4.0 38581 e 4.0 8.45E+06 — 290.7487. 7876 e 1.0 42260 o 0.0 1.32E+08 — 290.7487. 7876 e 1.0 42260 o 0.0 1.56E+07 — 291.5644. 18864 e 2.0 53152 o 2.0 1.61E+07 — 293.2471. 4490 o 5.0 38581 e 4.0 6.64E+08 — 296.1766. 4827 o 3.0 38581 e 4.0 6.64E+08 — 298.2418. 5061 o 3.0 38581 e 4.0 4.7.36E+07 — 302.0009. 11961 e 0.0 45064 o 1.0 5.30E+07 — 309.94015. 20840 e 3.0 53152 o 2.0 1.12E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 4.75E+07 — 309.94015. 20840 e 3.0 53152 o 2.0 1.22E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 4.0 4.0E+07 — 309.9774. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 2.44E+06 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.00E+07 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.00E+07 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.00E+07 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.00E+07 — 309.7974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 5.94E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.0 59.80E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 53052 o 4.0 4.0 59.80E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 59.80E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 59.80E+08 — 309.7974. 6311 o 4.0 38581 e 4.0 3.0 59.80E+08 — 309.7974. 6311 o 4.0	235.1692	10543	e	4.0	53052	o	4.0	2.70E + 08	-0.776
252,8319 5524 e 1.0 45064 o 1.0 3.59E+07	247.5263	4676	e	2.0	45064	o		5.07E + 08	-0.553
259.1201 0 0 0 4.0 38581 e 4.0 1.09E+07			e			o			-0.046
263.7461 15149 e									0.031
263.8881 7176 e 2.0 45064 o 1.0 4.00E+08 — 268.8231 7876 e 1.0 45064 o 1.0 4.00E+08 — 268.8231 7876 e 1.0 45064 o 1.0 4.20E+07 — 269.3607 16038 e 2.0 53152 o 2.0 571E+07 — 272.1332 5524 e 1.0 42260 o 0.0 1.32E+08 — 277.2837 2527 o 3.0 38581 e 4.0 8.45E+06 — 277.2837 2527 o 3.0 38581 e 4.0 8.45E+06 — 290.7487 7876 e 1.0 42260 o 0.0 1.96E+07 — 291.5644 18864 e 2.0 53152 o 2.0 1.61E+07 — 293.2471 4490 o 5.0 38581 e 4.0 6.64E+08 — 296.1766 4827 o 3.0 38581 e 4.0 6.64E+08 — 296.1766 4827 o 3.0 38581 e 4.0 7.36E+07 — 298.2418 5061 o 3.0 38581 e 4.0 7.36E+07 — 302.0009 11961 e 0.0 45064 o 1.0 5.30E+07 — 303.94015 20840 e 3.0 53152 o 2.0 4.12E+06 — 309.7974 6311 o 4.0 38581 e 4.0 9.31E+08 — 309.7974 6311 o 4.0 38581 e 4.0 9.31E+08 — 319.7172 21784 e 4.0 30.53622 o 4.0 4.09E+06 — 328.24329 8142 o 4.0 38581 e 4.0 5.94E+08 — 328.3239 8142 o 4.0 38581 e 4.0 5.94E+08 — 329.51010 2527 o 3.0 32867 e 2.0 4.12E+06 — 332.95010 2527 o 3.0 32867 e 2.0 4.12E+06 — 332.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 332.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 335.5550 3182 o 2.0 32867 e 2.0 4.11E+06 — 355.5259 — 4827 o 3.0 32867 e 2.0 4.11E+06 — 355.5259 — 4827 o 3.0 32867 e 2.0 4.11E+06 — 355.5259 — 4827 o 3.0 32867 e 2.0 4.11E+06 — 355.5259 — 4827 o 3.0 32867 e 2.0 4.11E+06 — 435.5259 440 0.0749 440.6668 11857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.1857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.1857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.1857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.1857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.1857 — 2638 o 2.0 32867 e 2.0 3.17E+06 — 440.6668 1181 o 2.0 32867 e 2.0 3.15E+06 — 440.6668 1181 o 2.0 32867 e 2.0 3.15E+06 — 440.6668 1181 o 2.0 32867 e 2.0 3.15E+06 — 440.6668 1181 o 2.0 3									-0.016
268,8231         7876         e         1.0         45064         o         1.0         4.20E+07         —           269,3607         16038         e         2.0         53152         o         2.0         5.71E+07         —           277,2837         2527         o         3.0         38581         e         4.0         8.45E+06         —           282,4642         3188         o         4.0         38581         e         4.0         3.77E+08         —           290,7487         7876         e         1.0         42260         o         0.0         1.96E+07         —           291,5644         18864         e         2.0         53152         o         2.0         1.61E+07         —           295,61766         4827         o         3.0         38581         e         4.0         6.64E+08         —           298,2418         5061         o         3.0         38581         e         4.0         4.75E+07         —           302,0009         1511         o         2.0         32867         e         2.0         1.73E+07         —           309,7974         6311         o									0.528
269,3607.         16038         e         2.0         53152         o         2.0         5.71E+07         272,1332         5524         e         1.0         42260         o         0.0         1.32E+08         -         272,1332         5527         o         3.0         38581         e         4.0         3.45E+06         -         282,4642         3188         o         4.0         38581         e         4.0         3.77E+08         -         292,7478         7876         e         1.0         42260         o         0.0         1.96E+07         -         293,2471         4490         o         5.0         38581         e         4.0         6.64E+08         -         293,2471         4490         o         5.0         38581         e         4.0         6.64E+08         -         293,2471         4490         o         5.0         38581         e         4.0         6.64E+08         -         293,2471         4490         o         5.0         38581         e         4.0         6.64E+08         -         296,2168         6.0         3.0         38581         e         4.0         4.75E+07         -         302,9009         1.0         3.0         38581									-0.267
272.1332         5524         c         1.0         42260         o         0.0         1.32E+08         —           277.2837         o         3.0         38581         e         4.0         8.45E+06         —           282.4642         3188         o         4.0         38581         e         4.0         3.77E+08         —           290.7487         7876         c         1.0         42260         o         0.0         1.96E+07         —           291.5644         18864         e         2.0         53152         o         2.0         1.61E+07         —           293.2471         4490         o         5.0         38581         e         4.0         7.36E+07         —           298.2418         5061         o         3.0         38581         e         4.0         4.75E+07         —           302.0009         11961         e         0.0         45064         o         1.0         5.30E+07         —           309.7974         6311         o         4.0         38581         e         4.0         4.09E+08         —           310.3534         20840         e         3.0         53052									-0.530 $0.080$
277.2837.									-0.296
282.4642         3188         o         4.0         38581         e         4.0         3.77E+08         —           290.7487         7876         e         1.0         42260         o         0.0         1.96E+07         0           291.5644         18864         e         2.0         53152         o         2.0         1.61E+07         —           293.2471         4490         o         5.0         38581         e         4.0         6.64E+08         —           298.2418.         5061         o         3.0         38581         e         4.0         7.36E+07         —           302.0009         11961         e         0.0         45064         o         1.0         5.30E+07         —           309.4015         20840         e         3.0         53152         o         2.0         1.73E+07         —           310.3534         20840         e         3.0         53052         o         4.0         409E+06         —           319.7172         21784         e         4.0         38581         e         4.0         24E+06         —           329.5010         25277         o									-0.290 $-0.002$
290.7487         7876         e         1.0         42260         o         0.0         1.96E+07         291.5644         18864         e         2.0         53152         o         2.0         1.61E+07									-0.330
291.5644         18864         e         2.0         53152         o         2.0         1.61E+07         —           293.2471         4490         o         5.0         38581         e         4.0         6.64E+08         —           296.1766         4827         o         3.0         38581         e         4.0         7.36E+07         —           298.2418         5061         o         3.0         38581         e         4.0         7.36E+07         —           302.0009         11961         e         0.0         45064         o         1.0         5.30E+07         —           308.9670         511         o         2.0         32867         e         2.0         1.73E+07         —           309.4015         20840         e         3.0         53152         o         2.0         4.12E+06         —           319.7172         21784         e         4.0         38581         e         4.0         99.1E+08         —           319.7172         21784         e         4.0         38581         e         4.0         4.09E+06         —           319.7172         21784         e         4.0									0.752
293.2471 4490 o 5.0 38581 e 4.0 6.64E+08 = 296.1766 4827 o 3.0 38581 e 4.0 7.36E+07 = 298.2418 5061 o 3.0 38581 e 4.0 7.36E+07 = 302.0009 11961 e 0.0 45064 o 1.0 5.30E+07 = 308.9670 511 o 2.0 32867 e 2.0 1.73E+07 = 309.4015 20840 e 3.0 53152 o 2.0 4.12E+06 = 309.4015 20840 e 3.0 53152 o 2.0 4.12E+06 = 310.3534 20840 e 3.0 53052 o 4.0 4.09E+06 = 319.7172 21784 e 4.0 53052 o 4.0 4.09E+06 = 328.64329 8142 o 4.0 38581 e 4.0 5.94E+08 = 328.64329 8142 o 4.0 38581 e 4.0 5.94E+08 = 328.64329 8142 o 4.0 38581 e 4.0 5.94E+08 = 328.64329 8142 o 4.0 38581 e 4.0 2.44E+06 = 333.7.7403 8981 o 4.0 38581 e 4.0 2.44E+06 = 333.7.7403 8981 o 4.0 38581 e 4.0 2.44E+06 = 34.44161 16038 e 2.0 32867 e 2.0 1.92E+05 = 35.5259 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.5259 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.5259 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4827 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.17E+06 = 35.50529 4829 o 3.0 32867 e 2.0 3.25E+06 = 36.50529 4829 o 3.0 32867 e 2.0 3.25E+06 = 36.50529 4829 o 3.0 32867 e 2.0 3.25E+06 = 36.50529 4829 o 3.0 32867 e 2.0 3.25E+06 = 36.50529									-0.111
298.2418         5061         o         3.0         38581         e         4.0         4.75E+07         4.75E+07           302.0009         11961         e         0.0         45064         o         1.0         530E+07         -           308.9670         511         o         2.0         32867         e         2.0         1.73E+07         -           309.4015         20840         e         3.0         53152         o         2.0         412E+06         -           309.7974         6311         o         4.0         38581         e         4.0         9.31E+08         -           310.3534         20840         e         3.0         53052         o         4.0         4.00E+06         321.6575         7501         o         3.0         38581         e         4.0         5.94E+08         -         321.6575         7501         o         3.0         38581         e         4.0         5.94E+08         -         322.5010         2527         o         3.0         38581         e         4.0         2.44E+06         -         2.0         11E+06         -         323.7403         8981         o         4.0         38581         e									-0.497
302.0009         11961         e         0.0         45064         o         1.0         5.30E+07         —           308,9670         511         o         2.0         32867         e         2.0         1.73E+07         —           309,4015         20840         e         3.0         53152         o         2.0         4.12E+06         —           309,7974         6311         o         4.0         38581         e         4.0         9.31E+08         —           310,3534         20840         e         3.0         53052         o         4.0         4.09E+06         —           319,7172         21784         e         4.0         53052         o         4.0         4.00E+07         —           328,4329         8142         o         4.0         38581         e         4.0         2.44E+06         —           328,5329         8142         o         4.0         38581         e         4.0         2.44E+06         —           336,7550         3182         o         2.0         32867         e         2.0         1.92E+05         —           344,4161         16038         e         2.0	296.1766	4827	o	3.0	38581	e	4.0	7.36E + 07	-0.033
308.9670         511         o         2.0         32867         e         2.0         1.73E+07         —           309.4015         20840         e         3.0         53152         o         2.0         4.12E+06         —           309.7974         6311         o         4.0         38581         e         4.0         9.31E+08         —           310.3534         20840         e         3.0         53052         o         4.0         4.09E+06         —           319.7172         21784         e         4.0         53052         o         4.0         4.00E+07         —           321.6575         7501         o         3.0         38581         e         4.0         5.94E+08         —           329.5010         2527         o         3.0         32867         e         2.0         4.11E+06         —           337.7403         8981         o         4.0         38581         e         4.0         2.82E+08         —           356.5259         4827         o         3.0         32867         e         2.0         3.17E+06         —           359.1000         10741         o	298.2418	5061	o	3.0	38581	e	4.0	4.75E + 07	0.057
309.4015         20840         e         3.0         53152         o         2.0         4.12E+06         —           309.7974         6311         o         4.0         38581         e         4.0         9.31E+08         —           310.3534         20840         e         3.0         53052         o         4.0         4.09E+06         6           319.7172         21784         e         4.0         53052         o         4.0         4.00E+07           321.6575         7501         o         3.0         38581         e         4.0         5.94E+08         —           329.5010         2527         o         3.0         32867         e         2.0         4.11E+06         —           329.5010         2527         o         3.0         32867         e         2.0         4.12E+06         —           337.7403         8981         o         4.0         38581         e         4.0         2.82E+08         —           344.4161         16038         e         2.0         45064         o         1.0         8.24E+06         —           359.1000         10741         o         3.0         32867			e	0.0		o		5.30E + 07	-0.323
309.7974         6311         0         4.0         38581         e         4.0         9.31E+08         —           310.3534         20840         e         3.0         53052         o         4.0         4.09E+06         —           319.7172         21784         e         4.0         53052         o         4.0         4.00E+07         —           328.4329         8142         o         4.0         38581         e         4.0         2.94E+08         —           329.5010         2527         o         3.0         32867         e         2.0         4.11E+06         —           336.7560         3182         o         2.0         32867         e         2.0         1.92E+05         —           337.7403         8981         o         4.0         38581         e         4.0         2.82E+08         —           344.4161         16038         e         2.0         45064         o         1.0         8.24E+06         —           359.1000         10741         o         3.0         32867         e         2.0         3.17E+06         —           359.5226         5061         o         3.0			o			e			-0.052
310.3534         20840         e         3.0         53052         o         4.0         4.09E+06         d         319.7172         21784         e         4.0         53052         o         4.0         4.00E+07         d         321.6575         7501         o         3.0         38581         e         4.0         5.94E+08         d         d         328.4329         8142         o         4.0         38581         e         4.0         2.44E+06         d         329.5010         2527         o         3.0         32867         e         2.0         4.11E+06         d         336.7650         3182         o         2.0         32867         e         2.0         4.11E+06         d         337.7403         8981         o         4.0         38581         e         4.0         2.82E+08         d         d         344.4161         16038         e         2.0         45064         o         1.0         8.24E+06         d         355.5259         4827         o         3.0         32867         e         2.0         3.17E+06         d         355.91000         10741         o         3.0         32867         e         2.0         2.51E+06         d									-0.433
319.7172       21784       e       4.0       53052       o       4.0       4.00E+07       d         321.6575       7501       o       3.0       38581       e       4.0       5.94E+08          328.4329       8142       o       4.0       38581       e       4.0       2.44E+06          3329.5010       2527       o       3.0       32867       e       2.0       4.11E+06          336.7650       3182       o       2.0       32867       e       2.0       4.19E+05          337.7403       8981       o       4.0       38581       e       4.0       2.82E+08          344.4161       16038       e       2.0       45064       o       1.0       8.24E+06          355.9520       4827       o       3.0       32867       e       2.0       3.17E+06          359.5226       5061       o       3.0       32867       e       2.0       2.51E+06          366.1452       11277       o       5.0       38581       e       4.0       1.69E+08									-0.315
321.6575 7501									0.577
328.4329       8142       o       4.0       38581       e       4.0       2.44E+06       —         329.5010       2527       o       3.0       32867       e       2.0       4.11E+06       —         336.7650       3182       o       2.0       32867       e       2.0       1.92E+05       —         337.7403       8981       o       4.0       38581       e       4.0       2.82E+08       —         337.7403       8981       o       4.0       38581       e       4.0       2.82E+08       —         344.4161       16038       e       2.0       45064       o       1.0       8.24E+06       —         355.5259       4827       o       3.0       32867       e       2.0       3.17E+06       —         359.1000       10741       o       3.0       38581       e       4.0       1.55E+08       —         366.1452       11277       o       5.0       38581       e       4.0       1.69E+08       —         369.1671       25972       e       4.0       53052       o       4.0       1.44E+07       —         376.1292									0.644 $-0.212$
329.5010									-0.212 $-0.001$
336.7650									0.042
337.7403       8981       0       4.0       38581       e       4.0       2.82E+08									-0.001
344.4161       16038       e       2.0       45064       o       1.0       8.24E+06       -         356.5259       4827       o       3.0       32867       e       2.0       3.17E+06       -         359.1000       10741       o       3.0       38581       e       4.0       1.55E+08       -         359.5226       5061       o       3.0       32867       e       2.0       2.51E+06       -         366.1452       11277       o       5.0       38581       e       4.0       1.69E+08       -         369.1671       25972       e       4.0       53052       o       4.0       1.44E+07       -         376.1292       6288       o       2.0       32867       e       2.0       7.20E+06       -         381.5696       18864       e       2.0       45064       o       1.0       3.73E+06       -         394.1065       7501       o       3.0       32867       e       2.0       8.25E+04       -         400.7496       7921       o       1.0       32867       e       2.0       2.16E+06       -         432.2699       15453									-0.144
356.5259       4827       o       3.0       32867       e       2.0       3.17E+06       d         359.1000       10741       o       3.0       38581       e       4.0       1.55E+08       d         359.5226       5061       o       3.0       32867       e       2.0       2.51E+06       -         366.1452       11277       o       5.0       38581       e       4.0       1.69E+08       d         369.1671       25972       e       4.0       53052       o       4.0       1.44E+07       d         376.1292       6288       o       2.0       32867       e       2.0       7.20E+06       -         381.5696       18864       e       2.0       45064       o       1.0       3.73E+06       -         383.4642       18993       e       0.0       45064       o       1.0       9.97E+06       -         394.1065       7501       o       3.0       32867       e       2.0       8.25E+04       -         400.7496       7921       o       1.0       32867       e       2.0       2.16E+06       -         432.2699       15453									-0.048
359.5226       5061       0       3.0       32867       e       2.0       2.51E+06			o			e			0.057
366.1452       11277       0       5.0       38581       e       4.0       1.69E+08       6369.1671       25972       e       4.0       53052       o       4.0       1.44E+07       6369.1671       6288       o       2.0       32867       e       2.0       7.20E+06       -6381.5696       -6288       o       2.0       32867       e       2.0       7.20E+06       -6381.5696       -6381.5696       18864       e       2.0       45064       o       1.0       3.73E+06       -6383.4642       1.0       3.0       32867       e       2.0       7.20E+06       -6383.4642       1.0       9.97E+06       -6383.4642       1.0       9.97E+06       -6383.4642       1.0       9.97E+06       -6394.1065       -6394.1065       -6394.1065       -6394.1065       -6394.1065       -6394.1065       -6394.1065       -6394.1065       -6394.1066	359.1000	10741	o	3.0	38581	e	4.0	1.55E + 08	0.311
369.1671       25972       e       4.0       53052       o       4.0       1.44E+07       6376.1292       e       2.0       32867       e       2.0       7.20E+06       -6381       -6288       o       2.0       32867       e       2.0       7.20E+06       -6381.5696       -6391.5696       -6391.5697		5061	o	3.0	32867	e	2.0	2.51E + 06	-0.020
376.1292       6288       o       2.0       32867       e       2.0       7.20E+06	366.1452	11277	o	5.0	38581	e	4.0	1.69E + 08	0.274
381.5696       18864       e       2.0       45064       o       1.0       3.73E+06          383.4642       18993       e       0.0       45064       o       1.0       9.97E+06          394.1065       7501       o       3.0       32867       e       2.0       8.25E+04          400.7496       7921       o       1.0       32867       e       2.0       2.16E+06          401.1857       28233       e       2.0       53152       o       2.0       5.52E+06          432.2699       15453       o       3.0       38581       e       4.0       7.94E+06          439.4618       30403       e       1.0       53152       o       2.0       3.14E+06          440.6668       10181       o       2.0       32867       e       2.0       3.25E+06          451.8277       10741       o       3.0       32867       e       2.0       1.75E+07          492.8546       32867       e       2.0       53152       o       2.0       1.28E+07		25972	e	4.0	53052	o		1.44E + 07	0.645
383.4642			o			e			-0.016
394.1065       7501       0       3.0       32867       e       2.0       8.25E+04       -400.7496       -400									-0.078
400.7496       7921       0       1.0       32867       e       2.0       2.16E+06       -         401.1857       28233       e       2.0       53152       o       2.0       5.52E+06       -         432.2699       15453       o       3.0       38581       e       4.0       7.94E+06       -         439.4618       30403       e       1.0       53152       o       2.0       3.14E+06       -         440.6668       10181       o       2.0       32867       e       2.0       3.25E+06       -         451.8277       10741       o       3.0       32867       e       2.0       2.65E+07       -         459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       -         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       -         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -									0.203
401.1857       28233       e       2.0       53152       o       2.0       5.52E+06       -432.2699       15453       o       3.0       38581       e       4.0       7.94E+06       -439.4618       30403       e       1.0       53152       o       2.0       3.14E+06       -440.6668       10181       o       2.0       32867       e       2.0       3.25E+06       -451.8277       10741       o       3.0       32867       e       2.0       2.65E+07       -459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       -492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       -492.8546       32867       e       2.0       3.2867       e       2.0       7.78E+07       -492.8546       -402.8526       13208       o       2.0       32867       e       2.0       7.78E+07       -492.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526       -402.8526									-0.001
432.2699       15453       o       3.0       38581       e       4.0       7.94E+06       -         439.4618       30403       e       1.0       53152       o       2.0       3.14E+06       -         440.6668       10181       o       2.0       32867       e       2.0       3.25E+06       -         451.8277       10741       o       3.0       32867       e       2.0       2.65E+07       -         459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       -         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       -         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									-0.019
439.4618       30403       e       1.0       53152       o       2.0       3.14E+06       e         440.6668       10181       o       2.0       32867       e       2.0       3.25E+06       -         451.8277       10741       o       3.0       32867       e       2.0       2.65E+07       -         459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       -         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       -         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									-0.048 $-0.036$
440.6668       10181       o       2.0       32867       e       2.0       3.25E+06       -451.8277       10741       o       3.0       32867       e       2.0       2.65E+07       e         459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       e         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       e         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -e         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -e         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -e         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									0.179
451.8277       10741       0       3.0       32867       e       2.0       2.65E+07       6         459.7662       11123       0       1.0       32867       e       2.0       1.75E+07       6         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       6         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       6         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       6         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       6         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									-0.014
459.7662       11123       o       1.0       32867       e       2.0       1.75E+07       e         492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       e         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -e         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -e         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -e         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									0.080
492.8546       32867       e       2.0       53152       o       2.0       1.28E+07       e         508.5296       13208       o       2.0       32867       e       2.0       7.78E+07       -e         510.8258       19010       o       5.0       38581       e       4.0       6.89E+07       -e         512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -e         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									0.122
508.5296       13208       o       2.0       32867       e       2.0       7.78E+07          510.8258       19010       o       5.0       38581       e       4.0       6.89E+07          512.9375       33562       e       3.0       53052       o       4.0       1.05E+05          550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									0.243
510.8258       19010       o       5.0       38581       e       4.0       6.89E+07          512.9375       33562       e       3.0       53052       o       4.0       1.05E+05          550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									-0.248
512.9375       33562       e       3.0       53052       o       4.0       1.05E+05       -         550.6448       34996       e       2.0       53152       o       2.0       1.11E+05									-0.289
			e					1.05E + 05	-0.020
574.0959 15453 o 3.0 32867 e 2.0 2.94E+07	550.6448	34996	e	2.0	53152	o	2.0	1.11E + 05	0.003
	574.0959	15453	0	3.0	32867	e	2.0	2.94E + 07	0.225

TABLE 4—Continued

	LOWER LEVEL			τ	JPPER LEV			
λ (nm)	Energy (cm <sup>-1</sup> )	Parity	J Value	Energy (cm <sup>-1</sup> )	Parity	J Value	$gA^a$	$\mathrm{CF}^{\mathrm{b}}$
593.9607	28233	e	2.0	45064	0	1.0	1.22E+06	0.137
679.1636	38432	e	3.0	53152	0	2.0	1.75E + 05	0.003
681.8882	30403	e	1.0	45064	o	1.0	6.92E + 05	0.406
683.7670	38432	e	3.0	53052	o	4.0	5.35E + 06	-0.228
690.8051	38581	e	4.0	53052	o	4.0	9.37E + 05	0.026
819.6688	32867	e	2.0	45064	o	1.0	1.67E + 04	-0.008
822.3909	20711	0	1.0	32867	e	2.0	2.29E + 06	0.114
843.1620	30403	е	1.0	42260	0	0.0	2.94E + 05	-0.647
922.3825	42313	е	3.0	53152	o	2.0	1.02E + 04	-0.001
930.8940	42313	e	3.0	53052	o	4.0	2.29E + 05	0.097

Note.—For each transition, we give the wavelength  $(\lambda)$ , the lower and upper levels (energy, parity, J value), the weighted transition probability (gA), and the cancellation factor (CF).

The computational procedure used for calculating the oscillator strengths and radiative lifetimes in Th III is the pseudo-relativistic Hartree-Fock (HFR) method (Cowan 1981). Four sets of calculations (A, B, C, and D) were performed in the present work, each of them being combined with a well-established semiempirical adjustment of the radial parameters minimizing the differences between computed and experimental energy levels (Cowan 1981). In calculations A and B, the same sets of interacting configurations were retained, i.e., 5f6d, 5f7d, 5f8d, 5f7s, 5f8s, 6d7p, 6d8p, 6d6f, 6d7f, 6d8f, 7s7p, and 7s8p for the odd parity, and 5f7p, 5f8p, 5f6f, 5f7f, 5f8f, 5f2, 6d2, 7s2, 7p2, 6d7s, 6d8s, 6d7d, and 6d8d for the even parity. While corepolarization (CP) effects were not considered in calculation A, such contributions were included in calculation B using a core-polarization potential and a correction to the dipole matrix elements according to the procedure originally introduced by Migdalek & Baylis (1978) and recently used with success for different complex atomic systems belonging to lanthanide ions (as, e.g., La III-Lu III: Biémont et al. 1999; Er III: Biémont et al. 2001a; Pr III: Palmeri et al. 2000, Biémont et al. 2001c; Tm III: Li et al. 2001; and Yb III: Biémont et al. 2001b). In the latter approach, the CP parameters were chosen equal to  $\alpha_d = 10.26a_0^3$  and  $r_c =$  $1.89a_0$ . These values correspond to the dipole polarizability of the ionic core Th v as computed by Fraga, Karwowski, & Saxena (1976) and to the expectation value of r for the outermost core orbitals  $(6p^6)$  as calculated by the HFR technique, respectively. All the levels of the 5f6d, 7s7p, 6d7p, 5f7d, 5f7s, and 5f8s odd configurations have been considered in the fitting procedure, and the average energies, Slater integrals, and spin-orbit integrals of these configurations were varied as well as the  $R^k$  integrals for the interactions 5f6d-5f7s and 6d7p-7s7p. The levels of the 6d6fconfigurations, strongly overlapping those of the configurations 5f8d, 6d8p, and 7s8p unknown experimentally, were not considered in the adjustment procedure. For 64 levels (fitted using 35 parameters), the mean deviation in calculations A and B was 175 cm<sup>-1</sup>. For the even parity, the 39 levels below 80,000 cm<sup>-1</sup>, belonging to the 5f7p, 5f<sup>2</sup>, 6d<sup>2</sup>,  $7s^2$ , and 6d7s configurations, were included in the leastsquares fit. Twenty-five parameters  $(E_{av}, F^k, G^k, \zeta, \text{ effective})$ interaction parameters) were left free to vary. In the 5f8p,

5f6f, 6d8s, and 6d7d configurations, only the average energies were adjusted because many high-lying levels have not yet been determined experimentally or their designation is unknown. The mean deviation in the fit was 87 cm<sup>-1</sup> (calculations A and B).

Radiative lifetimes deduced from calculations A and B are compared to the experimental results in columns (3) and (4) of Table 2. As expected, because of the neglect of CP corrections, the HFR(A) results are not in good agreement with the measurements. When including such effects (calculation B), one can observe that the agreement between theory and experiment is improved for some levels, while it is deteriorated for some others. In the particular case of the  $5f^2$  level situated at 32867.274 cm<sup>-1</sup>, quite sensitive to CP effects, the HFR(B) lifetime value is now 33% longer than the experimental result. As already mentioned in previous papers concerning lanthanides (see, e.g., Biémont et al. 2001a, 2001b, 2001c; Palmeri et al. 2000), this is probably due to the fact that the CP corrections, as introduced in our model, are no longer valid for configurations including at least a 5f electron, as this orbital considerably overlaps the  $6s^26p^6$  core subshells.

In order to estimate the importance of core-core interactions, additional configurations with 6p to 5f core excitations have been included in the model (calculations C and D). These configurations, added to the ones retained in calculation A, were  $6p^55f^26d$ ,  $6p^55f^27d$ ,  $6p^55f^27s$ ,  $6p^55f^28s$ ,  $6p^55f7s7p$ , and  $6p^55f6d7p$  for the odd parity, and  $6p^55f^3$ ,  $6p^55f^27p$ ,  $6p^55f6d^2$ ,  $6p^55f7s^2$ , and  $6p^55f6d7s$  for the even parity. Thus in calculation C, 18 even and 18 odd configurations were considered but no core polarization was introduced in the model. In calculation D, CP contributions for the configurations not involving a 5f electron (using the same CP parameters as the ones adopted in calculation B) were considered. The mean deviations in calculations C and D reached 186 cm<sup>-1</sup> (odd parity) for 64 levels and 93 cm<sup>-1</sup> (even parity) for 39 levels. Radiative lifetimes obtained in the approximations C and D are reported in columns (5) and (6) of Table 2. The results of calculation D are expected to be the most accurate reported in the present paper, and consequently have been adopted as the final theoretical results.

Using the procedure D, transition probabilities and oscil-

<sup>&</sup>lt;sup>a</sup> This work, calculation D (see the text). Calculation normalized with the experimental lifetimes (see Table 2).

<sup>&</sup>lt;sup>b</sup> Small values of the cancellation factor, CF, indicate large cancellation effects.

TABLE 5 RADIATIVE PARAMETERS FOR THE MOST INTENSE TH III LINES AS OBSERVED IN THE LABORATORY

	I	LOWER LEVEL UPPER LEVEL		EL						
λ	Energy			Energy				$gA^{\mathrm{a}}$		
(nm)	(cm <sup>-1</sup> )	Parity	J Value	(cm <sup>-1</sup> )	Parity	J Value	log gf <sup>a</sup>	(s <sup>-1</sup> )	CF <sup>b</sup>	Intensity <sup>c</sup>
130.7439	6538	e	4.0	83023	o	5.0	-0.33	1.82E + 09	-0.558	3000
132.8488	4056	e	3.0	79330	o	4.0	-1.84	5.51E + 07	-0.216	1500
135.6924	10543	e	4.0	84239	o	5.0	-0.14	2.62E + 09	-0.495	3500
135.8707	6538	e	4.0	80137	o	5.0	-0.84	5.22E + 08	-0.433	1500
135.8708	9954	e	3.0	83553	o	4.0	-2.19	2.33E + 07	-0.026	
146.3346	16038	e	2.0	84374	o	3.0	-1.22	1.86E + 08	-0.186	2500
188.8098	16038	e	2.0	69001	o	1.0	0.00	1.90E + 09	0.376	100
214.9184	6538	e	4.0	53052	o	4.0	-0.03	1.35E + 09	-0.743	50
216.2817	5524	e	1.0	51745	o	0.0	-0.26	7.82E + 08	0.683	50
219.9752	9954	e	3.0	55399	o	2.0	0.35	3.15E + 09	-0.578	50
220.6611	4676	e	2.0	49981	o	3.0	-0.51	4.28E + 08	0.190	50
229.1612	4056	e	3.0	47680	o	2.0	-0.04	1.16E + 09	0.697	50
230.1166	6538	e	4.0	49981	o	3.0	0.24	2.19E + 09	0.648	100
231.9533	9954	e	3.0	53052	o	4.0	0.59	4.83E + 09	0.839	100
232.4676	4676	e	2.0	47680	o	2.0	-0.08	1.03E + 09	0.332	80
236.3046	7501	o	3.0	49806	e	2.0	0.24	2.06E + 09	-0.304	100
236.8913	5061	o	3.0	47261	e	4.0	-0.69	2.43E + 08	0.209	50
237.1412	5524	e	1.0	47680	o	2.0	0.04	1.28E + 09	0.829	100
238.1466	11961	e	0.0	53939	o	1.0	-0.20	7.34E + 08	0.754	80
239.1484	511	o	2.0	42313	e	3.0	-0.39	4.78E + 08	0.231	100
241.3466	3182	o	2.0	44603	e	1.0	0.13	1.53E + 09	-0.452	200
242.4557	2527	o	3.0	43759	e	2.0	-0.55	3.20E + 08	-0.054	50
242.7946	2527	o	3.0	43702	e	4.0	0.30	2.27E + 09	-0.311	200
243.1693	6311	o	4.0	47422	e	5.0	0.30	2.24E + 09	-0.292	200
244.1245	6311	0	4.0	47261	e	4.0	0.42	2.95E + 09	0.420	200
246.3661	3182	0	2.0	43759	e	2.0	0.14	1.53E + 09	0.376	100
247.3952	4056	e	3.0	44465	o	3.0	-0.10	8.58E + 08	-0.721	50
250.1068	7501	0	3.0	47471	e	3.0	0.24	1.87E + 09	0.384	100
251.2693	2527	0	3.0	42313	e	3.0	0.26	1.90E + 09	0.274	60
251.4302	7501	0	3.0	47261	e	4.0	0.14	1.45E + 09	-0.353	50
289.8934	511	0	2.0	34996	e	2.0	-0.04	7.17E + 08	-0.312	27
297.8660	0	0	4.0	33562	e	3.0	0.09	9.40E + 08	-0.497	50
307.8967	2527	0	3.0	34996	e	2.0	-0.32	3.35E + 08	0.153	11
309.7974	6311	0	4.0	38581	e	4.0	0.15	9.67E + 08	-0.315	11
314.8065	5524	e	1.0	37280	o	2.0	-0.11	5.35E + 08	0.560	16
322.1212	2527	0	3.0	33562	e	3.0	0.11	8.28E + 08	-0.466	43
329.0600	3182	0	2.0	33562	e	3.0	0.07	7.22E + 08	-0.315	37
331.3678	4827	0	3.0	34996	e	2.0	-0.16	4.21E + 08	0.287	17
350.7546	5061	0	3.0	33562	e	3.0	-0.43	2.04E + 08	-0.192	13
384.9183	0	0	4.0	25972	e	4.0	-1.36	1.95E + 07	-0.057	10
455.5719	6288	0	2.0	28233	e	2.0	-0.52	9.56E + 07	-0.235	16
458.9267	0	0	4.0	21784	e	4.0	-1.25	1.77E + 07	0.133	14
508.4699	6311	0	4.0	25972	e	4.0	-0.96	2.83E + 07	0.188	12
537.6130	3188	0	4.0	21784	e	4.0	-0.69	4.74E + 07	0.243	42
544.7153	511	0	2.0	18864	e	2.0	-0.79	3.67E + 07	-0.240	65
545.8967	2527	0	3.0	20840	e	3.0	-1.24	1.29E + 07	0.158	17
588.3625	8981	o	4.0	25972	e	4.0	-0.85	2.72E + 07	-0.237	12
624.2941	4827	0	3.0	20840	e	3.0	-0.98	1.76E + 07	-0.158	15
633.5406	5061	o	3.0	20840	e	3.0	-1.18	1.10E + 07	-0.243	16
659.9482	0	o	4.0	15149	e	4.0	-1.03	1.44E + 07	-0.191	59
746.1875	4490	o	5.0	17887	e	5.0	-1.01	1.19E + 07	-0.179	32
810.5394	8437	o	6.0	20771	e	6.0	-0.97	1.10E + 07	-0.185	16
991.0075	5061	o	3.0	15149	e	4.0	-0.74	1.26E + 07	0.250	45

Note.—For each transition, we give the wavelength, the lower and upper levels (energy, parity, J value), the weighted oscillator strength (log gf) and transition probability (gA), the cancellation factor (CF), and the laboratory intensity.

a HFR + CP values as obtained in this work (calculation D; see text).

b Small values of CF indicate strong cancellation effects.

c According to Blaise & Wyart 1992.

lator strengths have been calculated for about 900 transitions of Th III. Because of space limitations, all these results cannot be reported here, but they can be found in a database of astrophysical interest, DREAM.<sup>6</sup>

In Table 4, however, we give the transitions depopulating the levels for which the lifetimes have been measured in the present work. For each of these transitions, we quote both the weighted HFR transition probabilities (calculation D) and also, in the last column, the A-values normalized according to the lifetime measurements reported here. These last numbers are expected to be the most accurate data. Table 5 contains the oscillator strengths and the Einstein coefficients for the most intense transitions observed in the laboratory (Blaise & Wyart 1992).

The uncertainties affecting the oscillator strengths, which rely upon the accuracy of the theoretical branching ratios, are difficult to assess because no experimental data are available for comparison. However, from comparisons between theory and experiment carried out in a recent past for a variety of heavy ions, the accuracy of the f-values of the intense transitions is expected to scatter around 5%-10%. For the weak transitions (also difficult to measure with precision), the uncertainties could be larger, particularly when cancellation effects are affecting the line strength calculations. It should be emphasized, however, that all the transitions of Table 5 are not affected by such effects.

#### 4. THORIUM IN THE STARS

Thorium has been relatively little considered in stellar spectra. This is related to the fact that the Th II transitions are relatively weak and that the resolution reached until recently on many stellar spectra did not allow detailed quantitative study of weak line profiles in relation to blend-

<sup>6</sup> DREAM is available at: http://www.umh.ac.be/~astro/dream.shtml; it is also available through anonymous ftp at: ftp://umhsp02.umh.ac.be/ pub/ftp\_astro/dream.

ing problems. The high resolution and signal-to-noise ratio that are now reachable on the most recent spectra (e.g., the HST spectra) allow a more accurate quantitative analysis of the chemical composition of the stars.

It is worth noting here that the 401.9129 nm transition of the radionuclide <sup>232</sup>Th II has been investigated by Butcher (1987, 1988) in 20 G-type dwarfs and giants of various ages in order to connect the timescale of nucleosynthesis to that of stellar and Galactic evolution. Thirteen lines of Th II have been also suggested as present or possibly present in the Przybylski star (HD 101065) in the spectral range 395.9-500.0 nm (see the paper by Cowley et al. 2000; see also the wavelength list on Cowley's Web site<sup>7</sup>). In the same wavelength range, four transitions observed at 455.560, 458.917, 467.626, and 486.313 nm, respectively, have been identified as being due to doubly ionized thorium (Th III).

As doubly ionized lanthanides are currently observed in many CP stars, frequently with large overabundances, it is expected that some doubly ionized actinides, and particularly Th III, should also appear in the UV or visible spectra of some hot stars. A detailed investigation of highresolution spectra (e.g., those obtained with the HST) is needed to firmly establish such identifications. It is anticipated that the f values obtained in the present work will allow a quantitative investigation of thorium abundance in these stars.

The critical comments of an anonymous referee have been appreciated. This work was financially supported by the Swedish Natural Science Research Council and by the EU-TMR access to Large-Scale facility programme (contract HPRI-CT-1999-00041). Financial support from the Belgian FNRS is acknowledged by E. B., P. P., and P.Q.

### REFERENCES

```
Biémont, E., Garnir, H. P., Bastin, T., Palmeri, P., Quinet, P., Li, Z. S.,
Zhang, Z. G., Lokhnygin, V., & Svanberg, S. 2001a, MNRAS, 321, 481
Biémont, E., Garnir, H. P., Li, Z. S., Lokhnygin, V., Palmeri, P., Quinet, P.,
Svanberg, S., Wyart, J.-F., & Zhang, Z. G. 2001b, J. Phys. B, 34, 1869
Biémont, E., Garnir, H. P., Palmeri, P., Quinet, P., Li, Z. S., Zhang, Z. G.,
    & Svanberg, S. 2001c, Phys. Rev., 64, 022503
```

Biémont, E., Li, Z. S., Palmeri, P., & Quinet, P. 1999, J. Phys. B, 32, 3409 Blaise, J., & Wyart, J.-F. 1992, Selected Constants, Energy Levels and Atomic Spectra of Actinides (Paris: Editions du Centre National de la Recherche Scientifique)

Butcher, H. R. 1987, Nature, 328, 127

-. 1988, Messenger, 51, 12

Cowan, J. J., McWilliam, A., Sneden, C., & Burris, D. L. 1997, ApJ, 480, 246

Cowan, R. D. 1981, The Theory of Atomic Structures and Spectra (Berkeley: Univ. California Press)

Cowley, C. R., Ryabchikova, T., Kupka, F., Bord, D. J., Mathys, G., & Bidelman, W. P. 2000, MNRAS, 317, 299

de Bruin, T. L., & Klinkenberg, P. F. A. 1940, Proc. Acad. Sci. Netherlands. 43, 581

Fraga, S., Karwowski, J., & Saxena, K. M. S. 1976, Handbook of Atomic Data (Amsterdam: Elsevier)

François, P., Spite, M., & Spite, F. 1993, A&A, 274, 821

Klinkenberg, P. F. A. 1950, Physica, 16, 618

Li, Z. S., Lundberg, H., Wahlgren, G. M., & Sikström, C. M. 2000, Phys. Rev. A, 62, 032505

Li, Z. S., Zhang, Z. G., Lokhnygin, V., Svanberg, S., Bastin, T., Biémont, E., Garnir, H. P., Palmeri, P., & Quinet, P. 2001, J. Phys. B, 34, 1349

Litzén, U. 1974, Phys. Scr., 10, 103 Migdalek, J. E., & Baylis, W. E. 1978, J. Phys. B, 11, L497

Palmeri, P., Quinet, P., Frémat, Y., Wyart, J.-F., & Biémont, E. 2000, ApJS, 129, 367

Racah, G. 1950, Physica, 16, 651 Sneden, C., McWilliam, A., Preston, G. W., Cowan, J. J., Burris, D. L., & Armosky, B. J. 1996, ApJ, 467, 819

Sneden, C., Preston, G. W., McWilliam, A., & Searle, L. 1994, ApJ, 431,

Wyart, J.-F., & Kaufman, V. 1981, Phys. Scr., 24, 941

<sup>&</sup>lt;sup>7</sup> Available at: http://www.astro.Isa.umich.edu/users/cowley/ prznew2.html.