



LUND UNIVERSITY

Trajectory Generation for Assembly Tasks Via Bilateral Teleoperation

Ghazaei, Mahdi; Cho, Jang Ho; Johansson, Rolf; Robertsson, Anders

Published in:

Preprints of the 19th World Congress of the International Federation of Automatic Control (IFAC2014), Cape Town, South Africa. August 24-29, 2014

DOI:

[10.3182/20140824-6-ZA-1003.02559](https://doi.org/10.3182/20140824-6-ZA-1003.02559)

2014

[Link to publication](#)

Citation for published version (APA):

Ghazaei, M., Cho, J. H., Johansson, R., & Robertsson, A. (2014). Trajectory Generation for Assembly Tasks Via Bilateral Teleoperation. In E. Boje, & X. Xia (Eds.), *Preprints of the 19th World Congress of the International Federation of Automatic Control (IFAC2014), Cape Town, South Africa. August 24-29, 2014* (Vol. 19, pp. 10230-10235). International Federation of Automatic Control. <https://doi.org/10.3182/20140824-6-ZA-1003.02559>

Total number of authors:

4

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Trajectory Generation for Assembly Tasks via Bilateral Teleoperation [★]

M. Mahdi Ghazaei Ardakani^{*} Jang Ho Cho^{**}
Rolf Johansson^{***} Anders Robertsson^{****}

^{*} Faculty of Engineering (LTH), Lund University, SE 221 00 Lund,
Sweden (e-mail: mahdi.ghazaei@control.lth.se)

^{**} Korea Institute of Machinery & Materials (KIMM), South Korea
(e-mail: jangho@kimm.re.kr)

^{***} Faculty of Engineering (LTH), Lund University, SE 221 00 Lund,
Sweden (e-mail: rolf.johansson@control.lth.se)

^{****} Faculty of Engineering (LTH), Lund University, SE 221 00 Lund,
Sweden (e-mail: anders.robertsson.lth.se)

Abstract: For assembly tasks, the knowledge of both trajectory and forces are usually required. Consequently, we may use kinesthetics or teleoperation for recording human demonstrations. In order to have a more natural interaction, the operator has to be provided with a sense of touch. We propose a bilateral teleoperation system which is customized for this purpose. We introduce different coordinate frames to make the design of a 6-DOF teleoperation straightforward. Moreover, we suggest using tele-admittance, which simplifies instructing the robot. The compliance due to the slave controller allows the robot to react quickly and reduces the risk of damaging the workpiece.

Keywords: Teleoperation, Robotics, Force control, Assembly task, Trajectory generation.

1. INTRODUCTION

Robots have been used for decades to conduct repetitive tasks, e.g., assembly and pick-and-place, to replace human beings. Numerous industrial environments have benefited by employing robotic systems in terms of qualitative outcomes and efficient processing. In turn, the demand of robotic systems has been increasing in various application areas in order to deal with more complex and more flexible tasks. However, generating robotic commands for complex and flexible tasks has been a challenging problem. There are numerous suggested solutions in the literature and many of them rely on trajectory programming prior to the operation. In general, those methods that require state-event modeling is not easily implementable or compatible for different tasks.

Generating robotic motions is usually based on direct teaching via some human robot interface. The manipulation of the robotic systems is possible not only with the use of a teach pendant but also with direct manipulation (so called lead-trough programming). The direct manipulation of robots is way more intuitive than the conventional programming since trajectories are generated via human demonstration. Hence, it has been widely used in human skill acquisitions, Argall et al. (2009); Lee et al. (2012). However, the interface between human and robots is not

[★] The authors are member of the LCCC Linnaeus Center and the eLIIT Excellence Center at Lund University. This work was supported by the European Commission through the PRACE project and partly by the Industrial Strategic Technology Development Program (#10041618) funded by the Ministry of Knowledge Economy (MKE, South Korea).

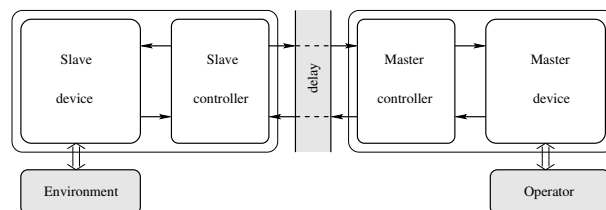


Fig. 1. Bilateral teleoperation system: information exchanges between master and slave in bilateral manner.

convenient and difficult to transfer accurate motions due to mechanical properties of robots such as inertia and friction. Hence, it is mainly used for small and light robots. Although compliant motion control could be employed to reduce inertial/frictional force, it is still very difficult to get instantaneous motion with industrial robots.

An alternative approach to the kinesthetic one for generating trajectories is teleoperation of a robot. In the teleoperation setup, a human operator manipulates a “master device” to control a “slave robot” in a remote environment. The master device is to decode the commands issued by an operator and forward them to the slave robot. For precise remote control of the slave robot, it is required to provide sensory feedback such as visual, haptic, or aural feedback to the operator. Haptic feedback provides the operator with the sense of touch from what the robot may perceive. Hence, it is essential when there is a contact between the slave robot and the environment. The haptic feedback establishes a bilateral communication channel between the operator and the robot besides the visual feedback.

The control of bilateral teleoperation systems has been extensively studied for decades, see (Hokayem and Spong, 2006) and references therein. A schematic diagram of a bilateral teleoperation system is illustrated in Fig. 1. The control architecture represents which information has to be exchanged between two sides (Aliaga et al., 2004). The ultimate goal of bilateral teleoperation is to achieve transparency by means of two-directional position and force tracking (Lawrence, 1993; Yokokohji and Yoshikawa, 1994). Despite recent advances in bilateral teleoperation in the task space (Liu and Chopra, 2012; Wang, 2013), experiments are still mainly limited to the robots with a few degrees-of-freedom. In general, the design of bilateral controller for industrial robots is challenging due to practical problems including inertia, friction, control bandwidth, and time delay.

In this paper, we propose a convenient framework to generate robotic trajectories within the teleoperation setup. Since stiff contacts are very difficult to handle in bilateral teleoperation, a compliant motion control have been employed. Moreover, the targeted compliance of the slave robot can be adjusted by the operator in real-time. This tele-admittance idea increases flexibility for various tasks. We implemented the proposed approach in a 6 DOF setting and verified it with a couple of assembly tasks.

The main contributions of this paper can be formulated as follows:

- Introduction of slave-assisted teleoperation by means of compliance
- A framework for defining a mapping between a master and a slave robot
- A 6 DOF setup to collect trajectory and interaction forces for teaching an industrial robot

The remainder of this paper is organized as follows. In Section 2, a mapping between a master device and a slave robot is defined. The control architecture of the system is described in terms of tele-admittance and haptic feedback to the operator in Section 3. In Section 4, the experimental results are illustrated with the interaction with a solid block, peg-in-hole and snap-fit tasks. Several issues raised in the paper are discussed in Section 5. Finally, a summary and some concluding remarks are provided in Section 6.

2. KINEMATIC CHAIN

A mapping between the DOF of a master device and a slave robot must be defined. To have a natural and generic approach we make use of the following feature frames. Each feature frame defines a coordinate frame and is attached to an object according to De Schutter et al. (2007).

For the master device, we make use of:

- (1) Master Base frame: This is the basic coordinate system provided by the haptic device. The position and orientations values are relative to this frame.
- (2) Master Task frame: This defines a natural frame for manipulation tasks, which might be for example rotated with respect to the orientation of the haptic device.

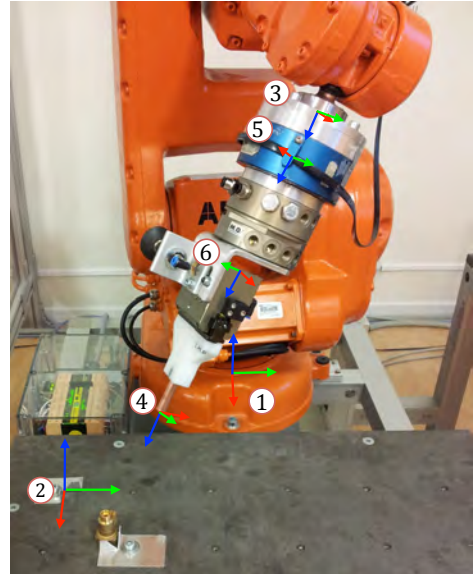


Fig. 2. Visualization of slave frames: 1) Slave Base Frame, 2) Slave Task Frame, 3) Flange Frame, 4) Slave Frame, 5) Sensor Frame, 6) Wrist Frame.

- (3) Handle frame: This is a frame firmly attached to the handle of the haptic device and usually hard-coded.
- (4) Master frame: This allows for an offset between the handle frame and the desired one. For example, when the handle is augmented with a tool.

Similarly, for the slave we define:

- (1) Slave Base frame: This is the default coordinate frame for a robot, which has usually its origin at the base of a robot.
- (2) Slave Task frame: This frame defines a coordinate system which is more convenient for specifying a task.
- (3) Flange frame: This is a frame firmly attached to the flange of the robot.
- (4) Slave frame (Tool frame): The origin of this frame is located at the tool center point (TCP). The frame defines the tool coordinate system.
- (5) Sensor frame: This frame is attached to the force/torque sensor and aligned with its coordinate system.
- (6) Wrist frame: This is a frame for active compliance of the robot. The origin of this frame acts as a virtual joint with respect to external forces. The designated principal moments of inertia are aligned with this frame.

Various slave coordinate frames are illustrated in Fig. 2. Fig. 3 represents the relationships between these frames. Each transformation corresponds to a translation and a rotation. The solid arrows represent the given transformations (either fixed or measurable). The dashed arrows correspond to the inferred transformations.

We define the mapping between the haptic interface and the robot as the translational and the rotational velocity coupling between the master frame with respect to the master task frame and the slave frame with respect to the slave task frame. In case of no scaling of motion and no interaction forces, this is equivalent to the matching of the slave frame and the master frame relative to their corresponding task frames.

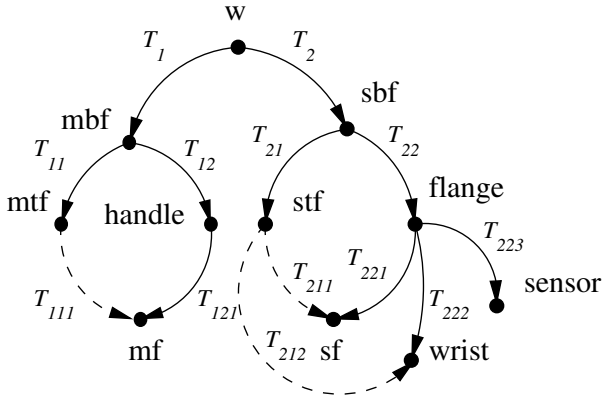


Fig. 3. Scene graph: world (w), master base frame (mbf), master task frame (mtf), master frame (mf), slave base frame (sbf), slave task frame (stf), slave frame (sf), handle, flange, sensor and wrist frames.

$$T_{211} = T_{111} \quad (1)$$

This can equivalently be described in terms of typical master and slave transformations.

$$T_{211} = T_{221}T_{22}T_{21}^{-1} \quad (2)$$

$$T_{111} = T_{121}T_{12}T_{11}^{-1} \quad (3)$$

$$T_{22} = T_{221}^{-1}T_{121}T_{12}T_{11}^{-1}T_{21} \quad (4)$$

In order to allow for position references by other devices, such as teach-pendant, an offset between the master frame and the slave frame needs to be calculated. The offset could be used also to compensate for an initial mismatch between the two frames. Adding an offset to T_{111} is equivalent to updating the translational part of T_{11} and the rotational part of T_{121} .

2.1 Compliant frame

In case of external forces, we superimpose a displacement ΔT to the equation of the motion at the wrist point.

$$T_{212} = T_{222}T_{221}^{-1}T_{211} = \Delta T T_{222}T_{221}^{-1}T_{111} \quad (5)$$

Taking into account the compliant frame, we get a new transformation between the flange frame and the robot base frame.

$$\tilde{T}_{22} = T_{222}^{-1}\Delta T T_{222}T_{22} \quad (6)$$

For the representation purpose, instead of transformation matrices, we use a vector of $\mathbf{p} \in \mathbb{R}^3$ and a quaternion $\mathbf{q} \in \mathbb{R}^4$ with the unity constraint $\|\mathbf{q}\| = 1$. If \mathbf{n} corresponds to the axis of rotation and θ the amount of rotation, this can be represented by $\mathbf{q} = (\eta, \epsilon)$. The scalar part is $\eta = \cos(\theta/2)$ and the vector part is $\epsilon = \sin(\theta/2) \cdot \mathbf{n}$.

The immediate benefit of such a representation is that it is singularity-free. All the rotations can be carried out by making use of quaternion algebra, namely quaternion multiplication and inversion. Additionally, we can describe the equations of the controller corresponding to ΔT transformation in terms of \mathbf{q} and \mathbf{p} .

3. CONTROL ARCHITECTURE

We employ a modified force-velocity control architecture, which requires position information of the master device

and force information of the slave robot. Let us denote \mathbf{v}_m as the translation velocity of the master frame with respect to the master task frame. Then, \mathbf{v}_m is transmitted to the slave side with a motion scaling factor γ and used as a reference velocity for the slave robot. To enable micro motion at the slave side, γ is generally set to less than one.

3.1 Tele-admittance

Often due to limitations such as bandwidth and delay, it is not possible to have a fully transparent haptic teleoperation. Therefore, it is desirable to give the robot some extent of autonomy. Specially, when dealing with contact forces, the delay in the feedback might impede the operator to react in time. Consequently, a stiff industrial robot may cause workpiece or tool damages. A human-like strategy to mitigate this problem is adjusting the arm impedance. In case of high uncertainties, by reducing the impedance it is possible to reduce the interaction forces. Ajoudani et al. (2012) showed that transferring the desired impedance is an effective strategy for teleoperation. Thus, we allow the operator to adjust it remotely.

A 6 DOF admittance controller was implemented to achieve active compliance at the wrist point, Siciliano and Villani (1999); Caccavale et al. (1999); Hogan (1985). The controller provides an isotropic translational and rotational admittance behavior with tunable parameters. The robot acts as a mass-spring-damper system. The rotational part allows for different moment of inertia along each axis.

Similar to Villani and De Schutter (2008), we use the notation $m, k_t, D \in \mathbb{R}$ for the translation part and $M \in \mathbb{R}^{3 \times 3}$, and $k_o, D_o \in \mathbb{R}$ for the rotational part. Using the admittance controller, we enforce the following dynamics for the wrist frame due to the vector of the external force \mathbf{F}_i and the vector of torque $\boldsymbol{\tau}_i$.

$$\dot{\mathbf{p}} = \mathbf{v} \quad (7)$$

$$m\dot{\mathbf{v}} = -k_t\mathbf{p} - D\mathbf{v} + \mathbf{F}_i \quad (8)$$

$$\dot{\mathbf{q}} = \frac{1}{2}\tilde{\boldsymbol{\omega}} \otimes \mathbf{q} \quad (9)$$

$$M\dot{\boldsymbol{\omega}} = -2k_o\eta\boldsymbol{\epsilon} - D_o\boldsymbol{\omega} - \boldsymbol{\omega} \times M\boldsymbol{\omega} + \boldsymbol{\tau}_i \quad (10)$$

where \mathbf{p} is the displacement vector of the wrist from the commanded position, \mathbf{v} is the velocity vector. $\tilde{\boldsymbol{\omega}} = (0, \boldsymbol{\omega})$, “ \otimes ” and “ \times ” indicate quaternion multiplication and cross product, respectively.

We chose the wrist frame for numerical integration. Since we have assumed that the principal moments of inertia are aligned with this frame, matrix M becomes diagonal in (10). To insure the unity constraint on the quaternion, it is normalized after the numerical integration.

Assuming we have an ideal reference tracking, we equate the reference signals with the position of the calculated compliant frame above.

3.2 Haptic feedback

On the master side, the haptic feedback to the operator given in the master task frame, \mathbf{F}_{fb}^{MTF} , can be designed as follows. We denote the vector of forces at the TCP point given in the slave task frame by \mathbf{F}_i^{STF} and the translational

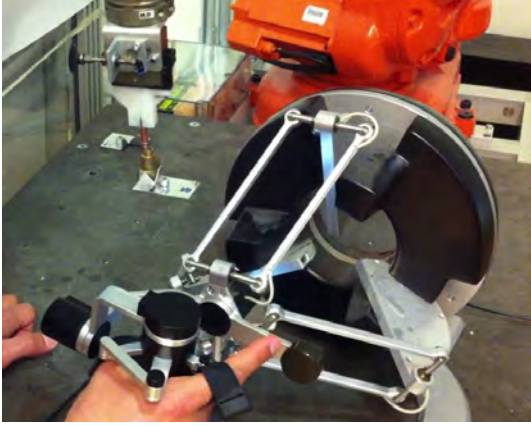


Fig. 4. Peg-in-hole setup: (Front) Master side with Omega-7 haptic interface. (Back) IRB140 robot with metal pipe held in the gripper.

velocity of the slave frame with respect to the slave task frame by \mathbf{v}_s . Note that these variables appear delayed.

$$\mathbf{F}_{fb}^{MTF} = \gamma(D_2 - D_1)\mathbf{v}_s - D_2\mathbf{v}_m + \alpha\mathbf{F}_i^{STF}, \quad (11)$$

where \mathbf{v}_m is the translation velocity of the master frame with respect to the master task frame; α represents a force scaling factor to adjust direct haptic feedback to the operator; D_1 and D_2 correspond to the free-motion damping and in-contact damping, respectively. When there is no contact between the slave and the environment and the delay is not significant, \mathbf{F}_i^{STF} and $\mathbf{v}_m - \gamma\mathbf{v}_s$ are almost equal to zero so that the operator perceives only some damping force corresponding to D_1 . On the other hand in contact, $\mathbf{v}_s \approx 0$ and the operator perceives a scaled force with the other damping coefficient, D_2 . Two damping factors were deployed to enhance the contact detection and stability.

Let R_{11} be the rotation of T_{11} transformation. The force feedback in the master base frame can be calculated as below.

$$\mathbf{F}_{fb} = R_{11}\mathbf{F}^{MTF}. \quad (12)$$

4. EXPERIMENTAL SETUP

Our setup consisted of a Force Dimension Omega-7 device which is a 7-DOF haptic interface with closed loop stiffness of 14.5 (N/mm), see Force Dimension (2013). We used the extra DOF of the device (the extent of the openness of the gripper) to adjust admittance remotely. Moreover, an industrial robot, ABB IRB 140, a wrist mounted six axis force and torque transducers with internal electronics, JR3 100M40A were used. The controller was implemented in Simulink[®] and using the Real-time workshop the code was compiled for ExtCtrl, Blondell et al. (2010). The final code runs at 250 Hz on a Fedora Xenomai machine connected via the ExtCtrl interface to the robot.

See Fig. 4 for the setup. Table 1 represents the nominal parameters of the slave controller.

Table 1. Controllers parameter

		m	k_t	D_t			
		1.5	10	0.4			
M_{xx}	M_{yy}	M_{zz}	k_o	D_o			
0.2669	0.2669	0.0338	18	5			

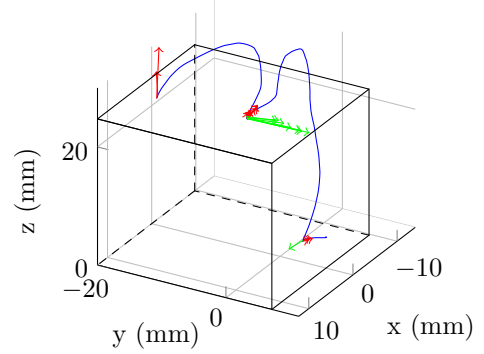


Fig. 5. Pushing a solid block. The trajectory is in blue, force vectors are in red, and torque vectors are in green.

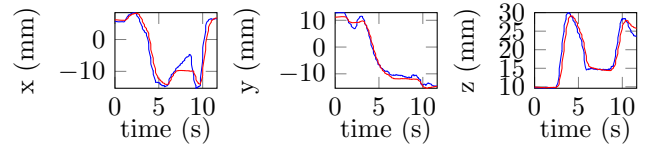


Fig. 6. Pushing a solid block. Comparison of master (blue) and slave (red) trajectories.

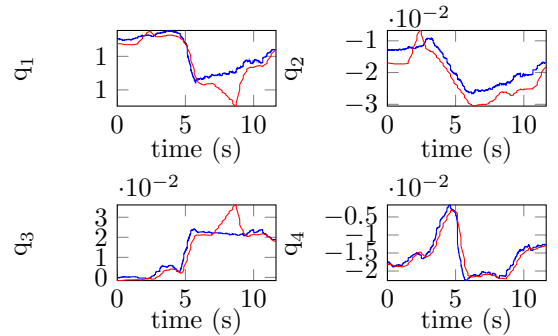


Fig. 7. Pushing a solid block. Comparison of master (blue) and slave (red) orientations.

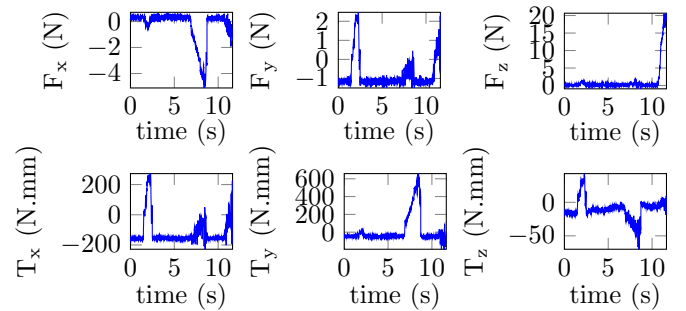


Fig. 8. Pushing a solid block. Interaction force and torque.

5. RESULTS

Three different scenarios were tested. The operator sequentially touched three sides of a solid block in the first experiment. The second experiment was a peg-in-hole operation. The third one involved a more challenging task of snap-fit.

The pushing task was meant to demonstrate the compliant behavior of the slave robot. The operator starts from the right hand side of the block and pushes the block. Then

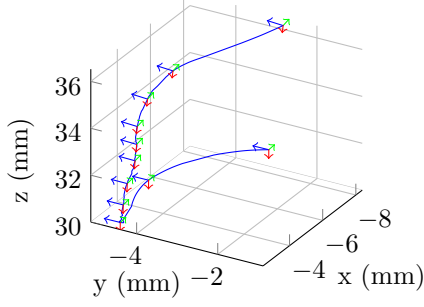


Fig. 9. Peg-in-hole. The trajectory and the tool frame are illustrated.

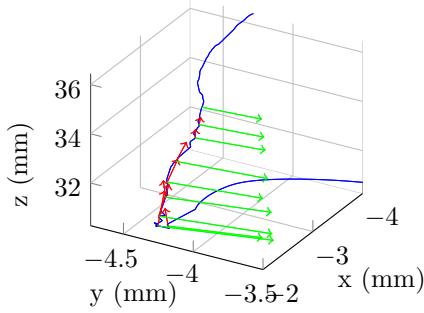


Fig. 10. Peg-in-hole zoomed in. The trajectory is in blue. The red arrows are prop. to the contact forces and green arrows to the torques (right-hand convention).

the end-effector is moved behind the block and pushes along the x-axis. Finally, the end-effector is moved to the top of the block and pushes downward. See Fig. (5), (6), (7), and (8) for details. Note that the last interaction is almost perpendicular to the surface and does not cause any torque.

As expected, the robot gives way to the external forces according to the demanded admittance. In general, the slave robot lags behind the master device. This is due to imperfect tracking and delay.

The peg-in-hole is a classical assembly operation. In this experiment, the operator inserts a small metal pipe inside a valve. Fig. (4) shows the setup for this task. Note that the gripper is open (the index finger relative to the thumb) to adjust the stiffness. The slave frame superimposed on the trajectory is illustrated in Fig. (9). Fig. (10) visualizes the interaction forces and torques.

The third task involves installing a switch in an emergency button box, see Fig. (11). The operator must approach the box with a specific orientation of the switch. After alignment, the switch should be rotated and pressed until it snaps. Fig. (12) illustrates the trajectory and the slave frame. In Fig. (13), the interaction forces and torques are visualized.

6. DISCUSSION

6.1 Stability

Since bilateral teleoperation system is to couple two dynamical systems (master and slave), it leads potentially to instability. The analysis and synthesis is made difficult by



Fig. 11. Snap-fit experiment

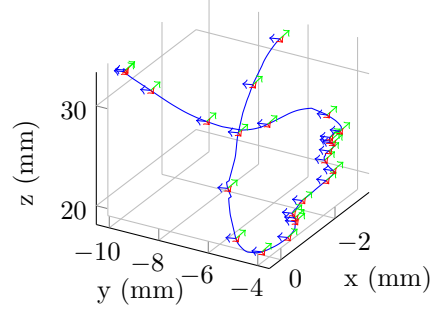


Fig. 12. Snap-fit. The trajectory and the slave frame are illustrated.

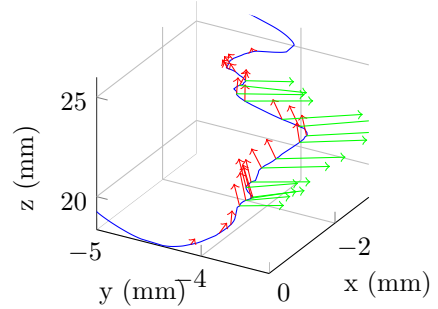


Fig. 13. Snap-fit zoomed in. The trajectory is in blue. The red arrows are prop. to the contact forces and green arrows to the torques (right-hand convention).

several factors including: transmission time delays between master and slave, uncertain dynamics of operator and environment (Hokayem and Spong, 2006). The use of an industrial robot as a slave device may increase these factors in terms of control bandwidth and nonlinear dynamics.

Although the given experimental setup provides relatively high update rate for an industrial robot, it is less than the recommended update rate of 1 kHz for haptic interfaces (Burdea and Brooks, 1996). Therefore, it may cause an additional delay in tracking reference trajectories on the slave. There is also a time delay over the Ethernet network between master and slave. There are some solutions to deal with the network delays, see (Kristalny and Cho, 2012) and references therein. However, they are not practical for the internal delays.

As a remedy, we employed force scaling factor α on the haptic feedback to the operator. The scaling factor contributes to the closed-loop stability by decreasing the overall loop gain (motion of master \rightarrow motion of slave \rightarrow environment's reaction \rightarrow force feedback). Although

a lower α may disturb the perception of the environment, it provides closed-loop stability under several uncertainties discussed above. To achieve higher α , the control bandwidth and delays have to be addressed in a robust control framework.

6.2 Autonomy in operation

As discussed earlier, it is not always possible to build a transparent teleoperation system. This problem is more prominent if we do not have a 4-channel teleoperation system. The master device used in our experiment provides only the measurement of the position and not the forces. Additionally, it is not possible to feedback torques to the operator. To mitigate these problems, we have implemented an admittance control. By choosing a suitable wrist frame and adjusting the admittance parameters, ΔT can in practice fill the gaps. For example, in the snap-fit task the indirect force control strategy helped the switch glide into its final position without demanding an accurate operation from the operator. Hence, the admittance control provides a loose coupling between the master and the slave. From this perspective, we have equipped the robot with a certain degree of autonomy.

This could be viewed as *cooperation* between the operator and the slave robot. Another possible cooperative scenario is enforcing pure kinematic constraints on the motion of the slave robot, which can relax the operator from taking them directly into account.

For comparison, we performed the same tasks while either turning off the force controller in the robot or the force feedback to the operator. Through a series of the experiments, we realized that tasks could be performed in shorter time and with lower values of interaction forces in the cooperative scenario compared to the others.

7. CONCLUSION

To generate trajectories for assembly tasks, the detection of contacts by the operator plays an important role. The task can be simplified by providing force feedback to the operator. In this work, we have introduced the notion of slave-assisted teleoperation. The active compliance on the slave side together with tele-admittance strategy gives the operator more freedom to manipulate objects with lower risk of damaging a workpiece.

Moreover, we have introduced a structured way to define required coordinate frames for teleoperation. This facilitates a quick setup of multi-degrees of freedom teleoperation and customizing it according to the preference of an operator.

Thanks to these features and the quaternion implementation, we were able to build a singularity-free 6-DOF teleoperation system for an industrial robot. The developed setup aims for collecting both position and force data for assembly tasks. The data can be processed for learning purposes. The force/torque provides valuable information for triggering segmentation and defining tolerances.

REFERENCES

Ajoudani, A., Tsagarakis, N., and Bicchi, A. (2012). Tele-impedance: Towards transferring human impedance reg-

- ulation skills to robots. In *Proc. ICRA 2012 IEEE Int. Conf. on Robotics and Automation*, 382–388.
- Aliaga, I., Rubio, A., and Sanchez, E. (2004). Experimental quantitative comparison of different control architectures for master-slave teleoperation. *IEEE Transactions on Control Systems Technology*, 12(1), 2–11.
- Argall, B.D., Chernova, S., Veloso, M., and Browning, B. (2009). A survey of robot learning from demonstration. *Robotics and Autonomous Systems*, 57(5), 469–483.
- Blomdell, A., Dressler, I., Nilsson, K., and Robertsson, A. (2010). Flexible application development and high-performance motion control based on external sensing and reconfiguration of ABB industrial robot controllers. In *Proc. ICRA 2010 Workshop on Innovative Robot Control Architectures for Demanding (Research) Applications*, 62–66. Anchorage, Alaska.
- Burdea, G. and Brooks, F. (1996). *Force and touch feedback for virtual reality*. Wiley New York.
- Caccavale, F., Natale, C., Siciliano, B., and Villani, L. (1999). Six-DOF impedance control based on angle/axis representations. *IEEE Transactions on Robotics and Automation*, 15(2), 289–300.
- De Schutter, J., De Laet, T., Rutgeerts, J., Decré, W., Smits, R., Aertbeliën, E., Claes, K., and Bruyninckx, H. (2007). Constraint-based task specification and estimation for sensor-based robot systems in the presence of geometric uncertainty. *The International Journal of Robotics Research*, 26(5), 433–455.
- Force Dimension (2013). Omega-7 overview. URL <http://www.forcedimension.com/omega7-overview>.
- Hogan, N. (1985). Impedance control: An approach to manipulation: Part III applications. *Journal of dynamic systems, measurement, and control*, 107(2), 17.
- Hokayem, P.F. and Spong, M.W. (2006). Bilateral teleoperation: An historical survey. *Automatica*, 42(12), 2035–2057.
- Kristalny, M. and Cho, J.H. (2012). On the decentralized h 2 optimal control of bilateral teleoperation systems with time delays. In *Decision and Control (CDC), 2012 IEEE 51st Annual Conference on*, 6908–6914.
- Lawrence, D. (1993). Stability and transparency in bilateral teleoperation. *IEEE Transactions on Robotics and Automation*, 9(5), 624–637.
- Lee, S.H., Suh, I.H., Calinon, S., and Johansson, R. (2012). Learning basis skills by autonomous segmentation of humanoid motion trajectories. In *12th IEEE-RAS International Conference on Humanoid Robots*, 112–119.
- Liu, Y.C. and Chopra, N. (2012). Controlled synchronization of heterogeneous robotic manipulators in the task space. *IEEE Transactions on Robotics*, 28(1), 268–275.
- Siciliano, B. and Villani, L. (1999). *Robot Force Control*. Kluwer international series in engineering and computer science. Kluwer Academic, Dordrecht, Netherlands.
- Villani, L. and De Schutter, J. (2008). *The Handbook of Robotics*, chapter 7, 164–170. Springer, Berlin Heidelberg.
- Wang, H. (2013). Task-space synchronization of networked robotic systems with uncertain kinematics and dynamics. *IEEE Trans. Automatic Control*, 58(12), 3169–3174.
- Yokokohji, Y. and Yoshikawa, T. (1994). Bilateral control of master-slave manipulators for ideal kinesthetic coupling-formulation and experiment. *IEEE Transactions on Robotics and Automation*, 10(5), 605–620.