



# LUND UNIVERSITY

## High-Rate QC LDPC Codes of Short and Moderate Length with Good Girth Profile

Bocharova, Irina; Hug, Florian; Johannesson, Rolf; Kudryashov, Boris

*Published in:*

7th International Symposium on Turbo Codes and Iterative Information Processing (ISTC), 2012

*DOI:*

[10.1109/ISTC.2012.6325217](https://doi.org/10.1109/ISTC.2012.6325217)

2012

[Link to publication](#)

*Citation for published version (APA):*

Bocharova, I., Hug, F., Johannesson, R., & Kudryashov, B. (2012). High-Rate QC LDPC Codes of Short and Moderate Length with Good Girth Profile. In *7th International Symposium on Turbo Codes and Iterative Information Processing (ISTC), 2012* (pp. 150-154). IEEE - Institute of Electrical and Electronics Engineers Inc.. <https://doi.org/10.1109/ISTC.2012.6325217>

*Total number of authors:*

4

### General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

#### IEEE COPYRIGHT NOTICE

©2012 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, including reprinting/republishing this material for advertising or promotional purposes, creating new collective works for resale or redistribution to servers or lists, or reuse of any copyrighted component of this work in other works.

This material is presented to ensure timely dissemination of scholarly and technical work. Copyright and all rights therein are retained by authors or by other copyright holders. All persons copying this information are expected to adhere to the terms and constraints invoked by each authors copyright. In most cases, these works may not be reposted without the explicit permission of the copyright holder.

*Last Update: May 30, 2011*

# High-Rate QC LDPC Codes of Short and Moderate Length with Good Girth Profile

Irina E. Bocharova<sup>1</sup>, Florian Hug<sup>2</sup>, Rolf Johannesson<sup>2</sup>, and Boris D. Kudryashov<sup>1</sup>

<sup>1</sup> Dept. of Information Systems  
St. Petersburg Univ. of Information Technologies,  
Mechanics and Optics  
St. Petersburg 197101, Russia  
Email: {irina, boris}@eit.lth.se

<sup>2</sup> Dept. of Electrical and Information Technology,  
Lund University  
P. O. Box 118, SE-22100 Lund, Sweden  
Email: {florian, rolf}@eit.lth.se

**Abstract**—Irregular QC LDPC codes with parity-check matrices having different degree distributions are studied. A new algorithm for finding regular and irregular QC LDPC codes with a good girth profile as well as a good sliding-window girth is presented. As examples, simulation results for QC LDPC codes with good girth profile, rate  $R=4/5$ , and lengths about 1000, 2000, and 4000, constructed from base matrices with proper degree distributions are given. Their simulated BER and FER performances for belief propagation decoding are compared with the best previously known irregular QC LDPC codes of the same rate and length. It is shown that the constructed codes outperform the best previously known codes of same rate and lengths.

## I. INTRODUCTION

It is well-known that low-density parity-check (LDPC) codes with iterative low-complexity decoding achieve performances close to the Shannon limit. This fact attracts attention of many researches to this class of codes and makes LDPC codes a good choice for modern communication standards [1], [2], [3]. In this paper we will focus on quasi-cyclic (QC) LDPC codes. It is well-known that such codes can be represented in the form of tailbiting block codes, which supports searching for new low-complexity encoding codes. There exist two subclasses of QC LDPC block codes: *regular* and *irregular*. If each column of its parity-check matrix contains exactly  $J$  ones and each row contains exactly  $K$  ones the corresponding QC LDPC code is called  $(J, K)$ -regular; and irregular otherwise.

The length of the shortest cycle in the Tanner graph of a QC LDPC code, that is, its *girth*, is considered to be an important code parameter, as it determines the number of independent iterations in low-complexity belief-propagation decoding. A typical approach to constructing new both regular and irregular QC LDPC codes is based on searching for a suitable labeling of a proper *base* parity-check matrix (*base* Tanner graph [4]) which satisfies the target girth of its Tanner graph (see, for example, [5], [6], [7] and references therein). It is intuitively clear that the bit error rate performance of QC LDPC codes obtained in such a way depends also on the structure of the base matrix, more precisely on its column *degree distribution* [8], that is, the distribution of its column weights. Some publications state that a girth of 6 is sufficient to achieve bit error rate performance close to the theoretical limit (see, for example, [9] and references therein) and that QC LDPC codes with larger girth typically have smaller minimum distances resulting in higher error floors. Moreover, it is typically stated

that for irregular codes the structure of the base matrix plays an even more important role than the girth of the Tanner graph. In other words, if the girth of the Tanner graph is 6 then by improving its degree distribution a bit error rate performance close to the theoretical limit can be achieved. For example, in the WIMAX standard [1], a set of such high-rate irregular QC LDPC codes of rates  $R=1/2$ ,  $2/3$ ,  $3/4$ , and  $5/6$  and rather short lengths were suggested. In [9], examples of similar high-rate irregular QC LDPC codes of short and moderate lengths with improved bit error rate performance are given. To the best of our knowledge nobody reported noticeably better results than [9], especially for rate  $R = 4/5$  and lengths less than or equal to 4000.

In this paper we study the relation between the girth of the Tanner graph corresponding to irregular QC LDPC codes constructed from base matrices with good degree distributions and the achievable bit error performance. A new algorithm is presented to find labelings yielding a good *girth profile*, that is, a vector of girth values whose  $i$ th component is equal to the girth of the Tanner graph corresponding to the submatrix constructed by using  $i$  columns of the smallest weight of its parity-check matrix. Moreover, our algorithm guarantees that in a sliding-window containing  $w$  consecutive columns of the parity-check matrix ordered by their weights, the minimal girth value is larger than or equal to a predetermined value  $g_w > g$ , where  $g$  is the target girth. By applying a greedy algorithm [10] to obtain a base matrix for an irregular QC LDPC code with a good *degree distribution*, followed by our new algorithm for finding labelings with a good girth profile, we constructed a set of both regular and irregular QC LDPC codes of rate  $R = 4/5$  and lengths about 1000, 2000, and 4000. Their bit error rate (BER) and frame error rate (FER) performances is compared with performances of QC LDPC codes from [9] with the same rate and lengths. Finally, some conclusions are drawn.

## II. REGULAR AND IRREGULAR QC LDPC CODES

A rate  $R = b/c$  parent convolutional LDPC code can be determined by its polynomial parity-check matrix  $H(D)$  of

syndrome memory  $m$

$$H(D) = \begin{pmatrix} h_{11}(D) & h_{12}(D) & \dots & h_{1c}(D) \\ h_{21}(D) & h_{22}(D) & \dots & h_{2c}(D) \\ \vdots & \vdots & \ddots & \vdots \\ h_{(c-b)1}(D) & h_{(c-b)2}(D) & \dots & h_{(c-b)c}(D) \end{pmatrix} \quad (1)$$

where  $h_{ij}(D)$  is either zero or a monomial entry, that is,  $D^{w_{ij}}$  with  $w_{ij}$  being a nonnegative integer. Its *degree matrix*  $W$  follows as the  $(c-b) \times c$  matrix with entries  $w_{ij}$  at the positions of the monomials  $D^{w_{ij}}$  and  $-1$  at the zero positions. If each column of  $H(D)$  contains  $J$  nonzero elements and each row contains  $K$  nonzero elements the QC LDPC convolutional code is  $(J, K)$ -regular; and irregular otherwise.

By tailbiting the parent convolutional code to length  $M > m$  we obtain the parity-check matrix

$$H_{\text{TB}}^T = \begin{pmatrix} H_0^T & H_1^T & \dots & H_{m-1}^T & H_m^T & \mathbf{0} \\ \mathbf{0} & H_0^T & H_1^T & \dots & H_{m-1}^T & H_m^T \\ H_m^T & \mathbf{0} & H_0^T & H_1^T & \dots & H_{m-1}^T \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots \\ H_1^T & \dots & H_{m-1}^T & H_m^T & \mathbf{0} & H_0^T \end{pmatrix} \quad (2)$$

of an  $(Mc, Mb)$  QC LDPC block code, where

$$H(D) = H_0 + H_1 D + \dots + H_m D^m$$

and  $H_i$ ,  $i = 0, 1, \dots, m$ , are binary  $(c-b) \times c$  matrices.

The polynomial parity-check matrix  $H(D)$  (1) can be interpreted as a base matrix  $B$  labeled by monomials, where  $B$  is the  $(c-b) \times c$  binary matrix with ones at the positions of the nonzero entries of  $H(D)$ , satisfying

$$B = H(D)|_{D=1}$$

Interpreting both  $B$  and  $H_{\text{TB}}$  as *biadjacency matrices* [11] yields their corresponding Tanner graphs  $\mathcal{G}_B$  and  $\mathcal{G}$ , respectively. Moreover, the parity-check matrix  $H(D)$  (1) of the parent convolutional code corresponds to an infinite Tanner graph obtained by unwrapping the Tanner graph  $\mathcal{G}$  of the tailbiting block code and extending it to infinity in the time domain. Hence, the problem of finding new QC LDPC codes can be reduced to finding suitable base matrices  $B$  as well as proper labelings for the base Tanner graphs  $\mathcal{G}_B$  determined by  $B$ . The girth  $g$  is used as a target when searching for good QC LDPC codes. It is known that there exist a tailbiting length  $M$  and a set of edge labels, such that the girth  $g$  of the Tanner graph for the corresponding tailbiting block code of length  $n = Mc$  satisfies the inequalities [7].

$$g \geq 2d_2 \geq g_B + \lceil g_B/2 \rceil \geq 3g_B \quad (3)$$

where  $g_B$  is the girth of the base Tanner graph  $\mathcal{G}_B$  and  $d_2$  is the minimum second generalized Hamming distance of the linear block code whose parity-check matrix is equal to the incidence matrix of  $\mathcal{G}_B$ . Notice that the free girth  $g_{\text{free}}$ , that is, the length of the shortest cycle in the infinite Tanner graph determined by the polynomial matrix  $H(D)$  upperbounds  $g$ , that is,  $g \leq g_{\text{free}}$ .

For irregular QC LDPC codes, let  $J_{\min}$  and  $J_{\max}$  denote the minimum and maximum numbers of the nonzero entries in any column of  $H(D)$ , respectively. Then the degree distribution of the parity-check matrix  $H(D)$  as well as of the base matrix  $B$  is given by the vector

$$\mathbf{d}^p = (n_{J_{\min}} n_{J_{\min}+1} \dots n_{J_{\max}})$$

where  $n_i$  denotes the number of columns having  $i$  nonzero elements. Since the degree distribution can contain zeros, it can be efficiently represented as a set

$$\lambda_s = \{d^{(1)}(n_1), d^{(2)}(n_2), \dots, d^{(l)}(n_l)\}$$

where  $n_i$  is the number of columns with  $d^{(i)}$  nonzero elements,  $d^{(1)} = J_{\min}$ ,  $d^{(l)} = J_{\max}$ , and  $\sum_{i=1}^l n_i = c$ . Notice that the degree distribution is invariant with respect to column permutations.

Denote as  $H_{\text{TB}}^i$ ,  $i = 1, 2, \dots, Mc$ , a submatrix of  $H_{\text{TB}}$  formed by its  $i$  columns with the smallest column weight and let  $g_i$  be the girth of the corresponding Tanner graph with biadjacency matrix  $H_{\text{TB}}^i$ . Then we call the  $Mc$ -tuple

$$\mathbf{g}^p = (g_1 g_2 \dots g_{Mc} = g)$$

where  $g_i > g_{i+1}$ ,  $i = 1, 2, \dots, Mc$ , the *girth profile* of the QC LDPC block code determined by  $H_{\text{TB}}$ . It can be efficiently represented as the ordered set

$$\mathcal{S}_g = \{g^{(1)}(n_1), g^{(2)}(n_2), \dots, g^{(l)}(n_l)\} \quad (4)$$

where  $n_j < n_{j+1}$ ,  $n_l = Mc$ , and  $g_i = g^{(j)}$  for  $n_{j-1} < i \leq n_j$  with  $n_0 = 0$ . A girth profile  $\mathbf{g}^p$  is said to be superior to ( $>$ ) another profile  $\mathbf{g}^{p^*}$  if there exists a positive integer  $p$  such that

$$g_j = \begin{cases} = g_j^* & j = 1, 2, \dots, p-1 \\ > g_j^* & p \leq j \leq Mc \end{cases}$$

Similarly, for the infinite Tanner graph with biadjacency matrix  $H(D)$  the *free girth profile* is defined [10] as

$$\mathbf{g}_{\text{free}}^p = (g_{\text{free},1} g_{\text{free},2} \dots g_{\text{free},c})$$

Note that the inequality  $\mathbf{g}_{\text{free}}^p \geq \mathbf{g}^p$  always holds.

Next we will present an algorithm for searching for QC LDPC codes having a sliding-window girth  $g_w$ . For simplicity, we restrict ourselves to girth profiles for which  $n_i$  in (4) are multiples of  $M$  and represent the corresponding girth profiles as vectors of length  $c$

$$\tilde{\mathbf{g}}^p = (\tilde{g}_1 \tilde{g}_2 \dots \tilde{g}_c = g)$$

that is, we use the free girth profile  $\mathbf{g}_{\text{free}}$  but take also the tailbiting length  $M$  into account. Hence, the corresponding set  $\mathcal{S}_g$  contains at most  $c$  elements.

### III. A SLIDING-WINDOW ALGORITHM FOR SEARCHING QC LDPC BLOCK CODES WITH GOOD GIRTH PROFILE

Assume that by applying the greedy algorithm given in [10] we have constructed a base matrix  $B$  of size  $(c-b) \times c$  with a given degree distribution

$$\lambda_s = \left\{ d^{(1)}(n_1), d^{(2)}(n_2), \dots, d^{(l)}(n_l) \right\}$$

Moreover, let  $M$  be the tailbiting length and  $g$  be the target girth value. Our goal is to obtain a proper labeling for the base matrix  $B$  such that a parity-check matrix  $H(D)$  of the parent convolutional code has a good free girth profile  $g_{\text{free}}^p$  with  $g_{\text{free},c} \geq g$ . Moreover, by tailbiting  $H(D)$  to length  $M$  we obtain the parity-check matrix  $H_{\text{TB}}$  of the  $(Mc, Mb)$  QC LDPC block code whose girth profile  $g^p$  satisfies  $g_{Mc} = \tilde{g}_c \geq g$ .

Let  $L_w$  denote the current number of columns of the sliding-window within the base matrix  $B$  which should be labeled with the target girth  $g_w > g$ , then choose the maximum number of trials to be  $N_{\text{max}}$ , as well as the minimal and maximal number of the surviving candidates during each round to be  $S_{\text{max}}$  and  $S_{\text{min}}$ , respectively.

Moreover, let  $B_i$  denote a submatrix of  $B$  formed by its first  $i$  columns, where  $i \leq c$ , and let  $B_i^{(j)}$  denote the submatrix of  $B_i$  containing the  $j$  last columns of  $B_i$ ,  $j = \min\{i, L_w\}$ .

1. Choose the initial number of columns  $i_0$  and set  $i = i_0$ . Perform a random labeling of the nonzero positions of  $B_i$  with target girth values  $g$  and  $g_w$  for  $B_i$  and  $B_i^{(j)}$ , respectively. Generate  $s$  source candidates  $W_i$ ,  $S_{\text{min}} \leq s \leq S_{\text{max}}$ . Set the number of candidates  $n = 0$  and the number of trials  $N = 0$ .
2. While  $i \leq c$ 
  - 2.1 Choose randomly one of the  $s$  source candidates  $W_i$ . Assign random labels to the column  $b_{i+1}$  of the base matrix  $B$  and append it to the matrix  $W_i$ , that is, form  $W_{i+1} = [W_i; w_{i+1}]$  and set  $N \leftarrow N + 1$ .
  - 2.2 If the girth constraints  $g$  and  $g_w$  (for  $B_i$  and  $B_i^{(j)}$ ) are satisfied, then add  $W_{i+1}$  to the set of target candidates, set  $n \leftarrow n + 1$ , and, as long as  $N < N_{\text{max}}$  and  $n < S_{\text{max}}$ , goto step 2.1.
  - 2.3 If  $n \geq S_{\text{min}}$ , replace the set of source candidates  $W_i$  by the set of target candidates  $W_{i+1}$ , set  $i \leftarrow i + 1$ , set  $s = n$ ,  $n = 0$ , and goto step 2. Otherwise, stop the algorithm and revise  $L_w$  and  $g_w$ .

Notice that labeling a base matrix using the algorithm above implies constructing a system of girth inequalities for  $[W; w]$  with target girth  $g$  using algorithm A or B presented in [7] while taking the tailbiting length  $M$  additionally into account.

In Fig. 1, the simulated bit error rate (BER) and frame error rate (FER) performances for belief propagation decoding of QC LDPC blocks codes with rate  $R = 4/5$  and lengths about 1000, 2000, and 4000 with random labeling are compared with the QC LDPC codes with the same parameters but improved labelings obtained by using the above algorithm (Table I). As clearly seen from Fig. 1, improving the girth profile according to the proposed algorithm yields significantly better BER and

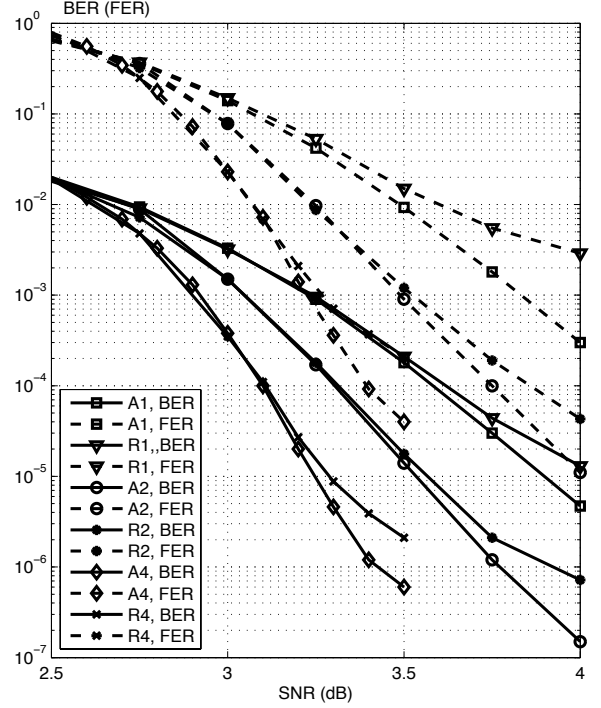


Fig. 1. Comparison of bit and frame error rates for QC LDPC codes with random and good labelings.

FER performances, especially for higher signal-to-noise ratios (SNRs).

Notice that our search criteria were entirely based on girth constraints for the QC LDPC code parity-check matrix and its submatrices. However, the proposed algorithm implicitly achieves rather good approximate cycle extrinsic (ACE) message degrees since it yields larger girth values for cycles formed by low-weight columns and thereby low-weight columns have larger connectivity [12].

### IV. SIMULATION RESULTS AND COMPARISON

In the following we will present the BER and FER performances of regular and irregular QC LDPC codes with rate  $R = 4/5$  and lengths about 1000, 2000, and 4000 constructed by applying the algorithm given above to base matrices with a good degree distribution and compare those results with QC LDPC codes from [9] with the same rate and lengths. Using the greedy algorithm in [10] we constructed a set of base matrices of size  $r \times 5r$ ,  $r = 3, 4, \dots, 7$ , with good degree distributions including weights from 2 up to  $r$ . By using the proposed algorithm, we obtained suitable labelings for these base matrices, yielding an improved girth profile  $\tilde{g}^p$ , from which we selected the ones with the best BER and FER performances. In Fig. 2, BER and FER performances for four QC LDPC codes of rate  $R = 4/5$  and lengths about 4000 (Table I) are compared. The corresponding code parameters, such as the girth  $g$  of the corresponding Tanner graph, girth profile  $\tilde{g}^p$ , sliding-window girth  $g_w$ , sliding-window size  $L_w$ , and degree distribution  $\lambda_s$  (for irregular codes), are presented in Table I. Clearly, irregular codes have better

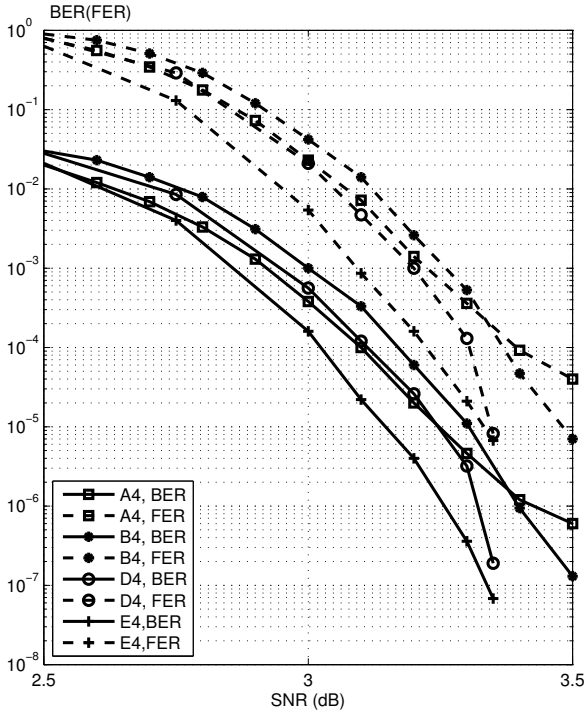


Fig. 2. Comparison of bit and frame error rates for QC LDPC codes of length 4000 with different base matrices and good labelings.

BER and FER performances than their regular competitors for relatively low SNRs. However, for higher SNR values the  $(J = 4, K = 20)$ -regular QC LDPC code of rate  $R = 16/20$  yields surprisingly good BER and FER performances, while the  $(J = 3, K = 15)$ -regular rate  $R = 12/15$  QC LDPC code has significantly worse performances even for higher SNRs. Among all irregular QC LDPC codes of length about 4000, the best performances are obtained by using the QC LDPC code of rate  $R = 28/35$ .

The high efficiency of the irregular rate  $R = 28/35$  QC LDPC code can be explained as follows: The girth of the Tanner graph corresponding to the submatrix which contains all columns with two nonzero elements and some of the columns with three nonzero elements is equal to 12, while using all other columns with three nonzero elements we obtain a girth larger than or equal to 10 (see the girth profile in Table I). Moreover, for a sliding-window size of  $L_w \geq 3$  among all columns with four nonzero elements, the sliding-window girth follows as  $g_w = 8$ . Finally, all remaining columns have a stronger protection due to their relatively large column weight. Thus, most of the cycles corresponding to  $g = 6$  include code symbols which participate in at least 5 different parity-checks, yielding an overall improved BER and FER performance.

In Figs. 3–5, the simulated BER and FER performances of the constructed QC LDPC codes (Table I) of lengths about 1000, 2000, and 4000, respectively, are compared with the best known competing codes [9]. Typically, the selected irregular codes whose base matrix has a good degree distribution yield

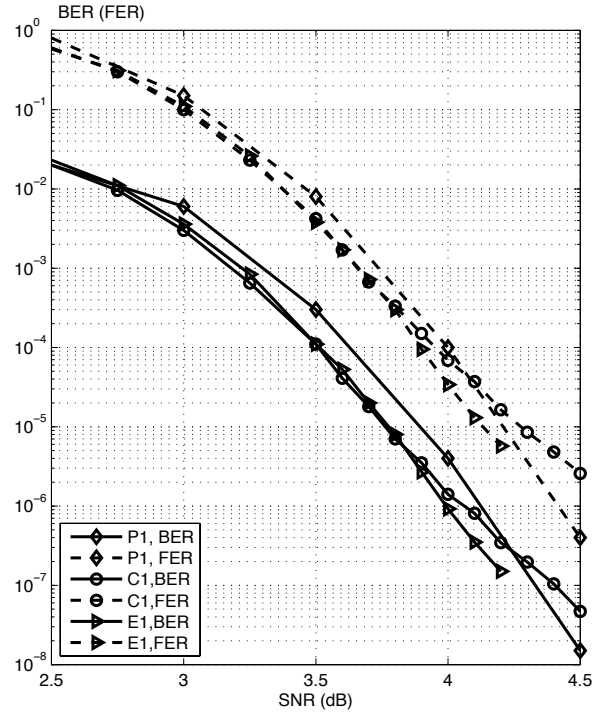


Fig. 3. Bit and frame error rates for the QC LDPC block codes of  $R = 4/5$  and length 1000.

TABLE I  
PARAMETERS OF RATE  $R = 4/5$  QC LDPC BLOCK CODES

Code	Base matrix $H$	$n, k$	$g, g_w, L_w$	$g^p$
A1	$3 \times 15$	(1005,804)	6,8,9	10(4),8(9),6(15)
A2	all ones	(2010,1608)	8,10,4	10(5),8(15)
A4		(4005,3204)	8,10,6	12(5),10(8),8(15)
B1	$4 \times 20$	(1000,800)	6,8,6	8(7),6(15)
B2	all ones	(2020,1616)	6,8,9	8(10),6(15)
B4		(4000,3200)	6,8,13	8(13),6(15)
C1	$5 \times 25$ ,	(1000,800)	6,8,4	8(16),6(25)
C2	2(4),3(10),	(2025,1620)	6,8,7	8(19),6(25)
C4	4(5),5(6)	(4000,3200)	6,8,10	12(7),10(14),8(21),6(25)
D1	$6 \times 30$ ,	(1020,816)	6,8,4	12(6),10(8),8(9),6(30)
D2	2(5),4(15),	(2010,1608)	6,8,8	12(7),10(8),8(11),6(30)
D4	5(6),6(4)	(4020,3216)	6,8,7	12(9),10(10),8(20),6(30)
E1	$7 \times 35$ ,	(1015,812)	6,8,2	10(15),8(22),6(35)
E2	2(6),3(11),	(2030,1624)	6,8,3	12(9),10(17),8(24)
E4	4(7),6(7),7(4)	(4025,3220)	6,8,3	12(11),10(18),8(21),6(35)
R1	$3 \times 15$	(1005,804)		$g = 6$
R2	all ones	(2010,1608)		$g = 6$
R4	random	(4005,3204)		$g = 8$
P1	[9], ex. 1	(961,765)		$g = 6$
P4	[9], ex. 8	(3969,3213)		$g = 6$

better BER and FER behavior for lower SNRs and lose compared to the regular codes with column weight larger than 3 for higher SNRs. In a wide range of SNRs, QC LDPC codes of lengths 1000 and 4000 outperform the best previously known codes of the same rate and lengths. For lengths about 2000 we were unable to find any competing QC LDPC code of rate  $R = 4/5$ .

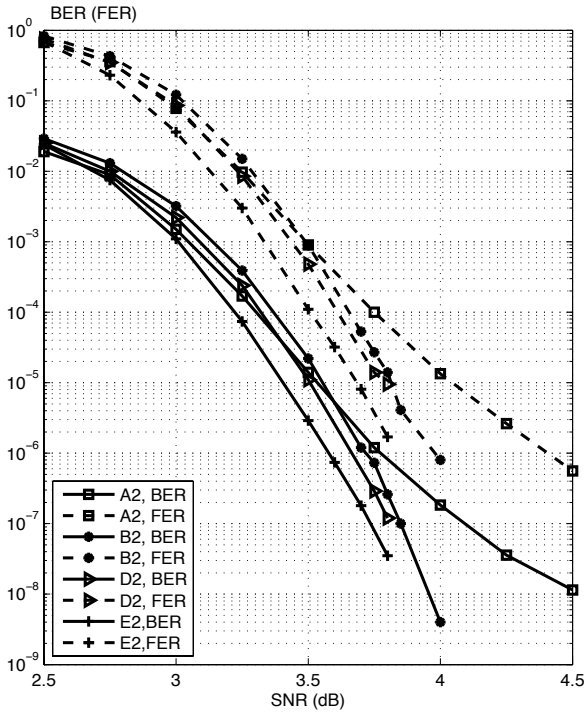


Fig. 4. Bit and frame error rates for the QC LDPC block codes of  $R = 4/5$  and length 2000.

## V. CONCLUSION

In this paper we suggested a computer-search based approach to improve the girth profile of QC LDPC codes. This approach consists of selecting QC LDPC codes with large girth values for subsets of columns of the code parity-check matrix. QC LDPC codes with different degree distributions of their base matrices were analyzed. A set of both regular and irregular QC LDPC codes of rate  $R = 4/5$  of rather short lengths with good degree distributions and improved girth profile were constructed. Comparisons of the simulated BER and FER performances of the selected codes show that irregular codes are typically better for lower SNRs and lose compared to regular codes with column weight larger than 3 for higher SNRs. However, increasing the size of the base matrix gives more possibilities for improving its structure and could yield better irregular codes. This study brought us to the conjecture that, besides the girth profile and the degree distribution, the maximum column weight is an important parameter for QC LDPC codes. In particular, we note that even regular QC LDPC codes with larger column weight yield surprisingly good BER and FER performances.

## ACKNOWLEDGEMENTS

This research was supported in part by the Swedish Research Council under Grant 621-2010-5847.

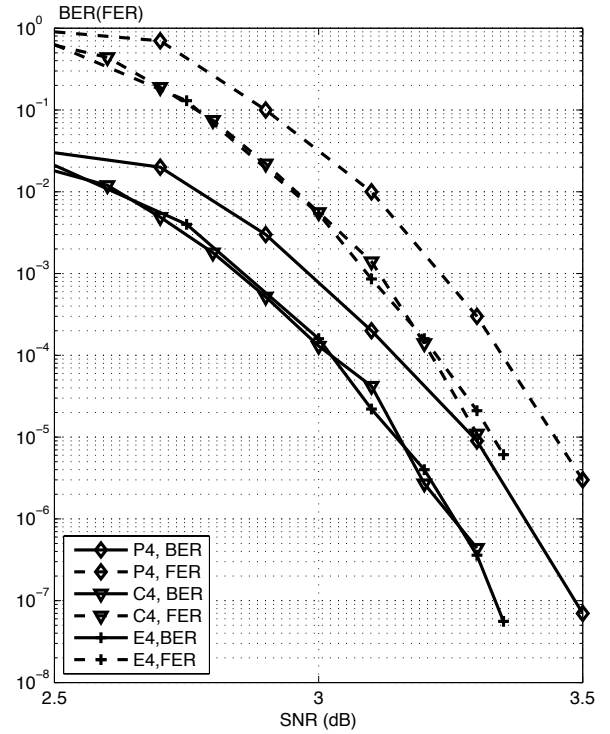


Fig. 5. Bit and frame error rates for the QC LDPC block codes of  $R = 4/5$  and length 4000.

## REFERENCES

- [1] *Air Interface for Fixed and Mobile Broadband Wireless Access Systems*, IEEE P802.16e/D12 Draft, Oct. 2005.
- [2] *Digital Video Broadcasting (DVB)*, European Telecommunications Standards Institute ETSI EN 302 307, Rev. 1.2.1, Aug. 2009.
- [3] *Digital Video Broadcasting (DVB)*, European Telecommunications Standards Institute ETSI EN 302 755, Rev. 1.1.1, Jul. 2008.
- [4] R. M. Tanner, "A recursive approach to low-complexity codes," *IEEE Trans. Inf. Theory*, vol. IT-27, no. 5, pp. 533–546, 1981.
- [5] M. E. O'Sullivan, "Algebraic construction of sparse matrices with large girth," *IEEE Trans. Inf. Theory*, vol. 52, no. 2, pp. 718–727, Feb. 2006.
- [6] M. Esmaili and M. Gholami, "Structured quasi-cyclic LDPC codes with girth 18 and column-weight  $J \geq 3$ ," *International Journal of Electronics and Communications (AEU)*, vol. 64, no. 3, pp. 202–217, Mar. 2010.
- [7] I. Bocharova, R. Johannesson, F. Hug, B. Kudryashov, and R. Satyukov, "Searching for voltage graph-based LDPC tailbiting codes with large girth," *IEEE Trans. Inf. Theory*, vol. 58, no. 4, Apr. 2012.
- [8] T. J. Richardson and R. L. Urbanke, "The capacity of low-density parity-check codes under message-passing decoding," *IEEE Trans. Inf. Theory*, vol. 47, no. 2, pp. 599–618, 2001.
- [9] L. Lan, L. Zeng, Y. Tai, L. Chen, S. Lin, and K. Abdel-Ghaffar, "Construction of quasi-cyclic LDPC codes for AWGN and binary erasure channels: A finite field approach," *IEEE Trans. Inf. Theory*, vol. 53, no. 7, pp. 2429–2458, 2007.
- [10] I. Bocharova, R. Johannesson, F. Hug, and B. Kudryashov, "A greedy search for improved QC LDPC codes with good degree distribution and girth profiles," in *Proc. International Symposium on Information Theory*, 2012, submitted for presentation.
- [11] A. S. Asratian, T. M. J. Denley, and R. Haggkvist, *Bipartite graphs and their applications*. Cambridge, U.K: Cambridge University Press, 1998.
- [12] T. Tian, C. Jones, J. D. Villasenor, and R. D. Wesel, "Selective avoidance of cycles in irregular ldpc code construction," *IEEE Trans. Commun.*, vol. 52, no. 8, pp. 1242–1248, Aug. 2004.