



# LUND UNIVERSITY

## Analysis of Exhaust PM Composition Emitted from Non-Sooting Volatile Alcohols

Novakovic, Maja; Shamun, Sam; Malmborg, Vilhelm; Preger, Calle; Shen, Mengqin; Pagels, Joakim; Messing, Maria; Tunér, Martin; Tunestål, Per

2017

*Document Version:*

Publisher's PDF, also known as Version of record

[Link to publication](#)

*Citation for published version (APA):*

Novakovic, M., Shamun, S., Malmborg, V., Preger, C., Shen, M., Pagels, J., Messing, M., Tunér, M., & Tunestål, P. (2017). *Analysis of Exhaust PM Composition Emitted from Non-Sooting Volatile Alcohols*. Poster session presented at Nordic Society for Aerosol Research (NOSA) Aerosol Symposium 2017, Lund, Sweden.

*Total number of authors:*

9

*Creative Commons License:*

Unspecified

**General rights**

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

**Take down policy**

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00



**LUND**  
UNIVERSITY

# Analysis of Exhaust PM Composition Emitted from Non-Sooting Volatile Alcohols



**Metalund**  
LUNDS UNIVERSITET



M. Novaković<sup>1</sup>, S. Shamun<sup>1</sup>,

V.B. Malmberg<sup>2</sup>, C. Preger<sup>3</sup>, M. Shen<sup>1</sup>, J. Pagels<sup>2</sup>, M. Messing<sup>3</sup>, M. Tunér<sup>1</sup>, P. Tunestål<sup>1</sup>

<sup>1</sup>Division of Combustion Engines, Lund University

<sup>2</sup>Division of Ergonomics and Aerosol Technology, Lund University

<sup>3</sup>Division of Solid State Physics, Lund University

## Introduction

The combustion engine, a well-known source of aerosols, has seen remarkable improvements regarding efficiency and emissions. A drawback of the conventional compression ignition (CI) engine is its requirement for a high cetane number fuel, i.e. diesel which contains long carbon chains forming particulate matter (PM) when combusted in the conventional diesel combustion (CDC) process.

A previous study of PM from partially premixed combustion (PPC) and CDC utilizing ethanol and methanol in a Scania D13 engine without emission after treatment systems (EATS) showed that the particle sizes from the alcohol combustion never exceeded 30 nm in diameter. Until now, the characteristics (origin, formation and constituents) of these nano-sized particles formed in the PPC and CDC process were unknown. It has been hypothesized that they originate from lubrication oil and engine wear.

## Method

Displaced volume [cm <sup>3</sup> ]	2124
Stroke [mm]	160
Bore [mm]	130
Con. rod length [mm]	255
Compression ratio [-]	17.3:1
Number of valves [-]	4
Swirl ratio [-]	2.1
Exhaust valve open [-]	137° CAD ATDC
Inlet valve open [-]	-141° CAD ATDC

### Tested Fuels


- MeOH
- EtOH
- Diesel

### Operation Conditions


- 6 bar, 10 bar IMEP<sub>G</sub>
- 1200 rpm
- CA50 at 5 CAD ATDC
- $\lambda \approx 3.0, \lambda \approx 1.9$
- 21% intake O<sub>2</sub> conc.

### Measurements

- Measurements of gaseous exhaust (AVL AMA i60)
- Soot mass concentration (AVL MSS)
- Particle size distribution (Cambustion DMS500)
- Transmission electron microscopy (JEOL JEM 3000F)

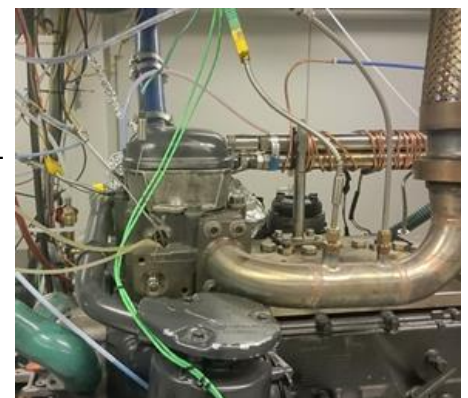


## Results and Conclusions

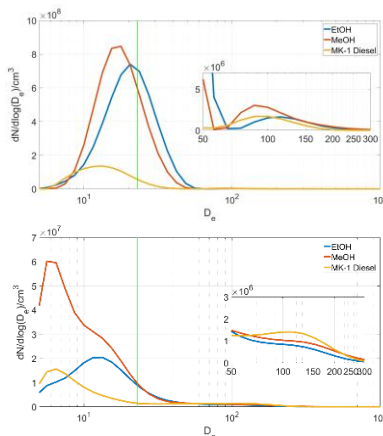


### Particle size distribution

- Particle amount is consistently highest for MeOH, followed by EtOH and finally Diesel.
- At higher loads, the accumulation mode can be seen to increase for Diesel, in comparison to the alcohols while the nucleation mode particles decrease for all three fuels.

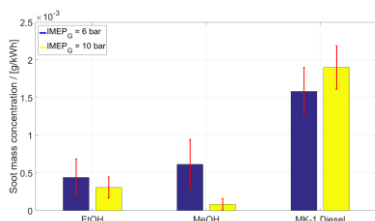


### Soot mass concentration

- Soot higher for Diesel than MeOH and EtOH.
- Soot mass for alcohols higher at higher loads.

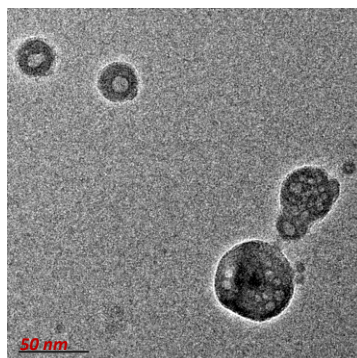


### TEM analysis for alcohols


Particles from alcohol combustion consisted of nanoparticles in the size range between 5-50 nm as well as larger more complex agglomerates.

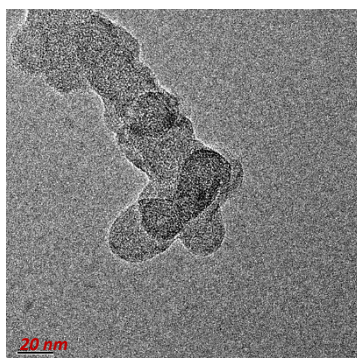

Although less common, the larger and more complex soot agglomerates could be found on the alcohol exhaust grid.

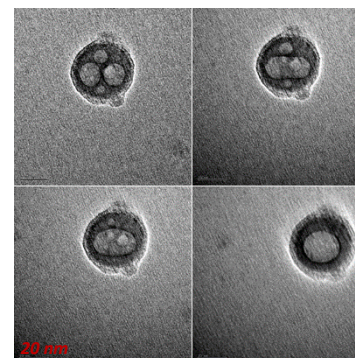


- The nucleation mode particles where spherical with one or more holes in the center of the particle.
- The cavities located in the center of the particles were not stable under the influence of the electron beam as they were merging into bigger holes.
- Not clear if the hole is in fact a hole or a liquid phase.
- The main elemental constituents of the EDX analyzed particles were Zn, Ca, P, S, believed to originate from the engine lubricant.

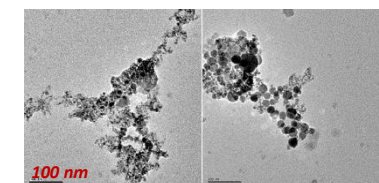

### TEM analysis for Diesel

Agglomerates of metallic nanoparticles were found on the diesel TEM grid.

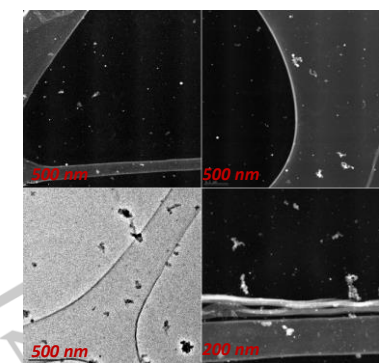

### Diesel-alcohol exhaust PM comparison

Alcohol exhaust contains larger amounts of nano sized PM (upper photos) while PM emitted from diesel combustion has a significantly higher amount of larger agglomerates (lower photos).

## Contact

Maja Novaković  
PhD Student  
Email: Maja.Novakovic@energy.lth.se  
Address: Energy Sciences, P.O. Box 118, 221 00 Lund, Sweden

Sam Shamun  
PhD Student  
Email: Sam.Shamun@energy.lth.se