



# LUND UNIVERSITY

## Optimizing the acquisition time for time domain spectral IP by measuring during the on-time

Olsson, Per-Ivar; Dahlin, Torleif; Auken, Esben; Fiandaca, Gianluca

*Published in:*

Proceedings of the 3rd International Workshop on Induced Polarization

2014

[Link to publication](#)

*Citation for published version (APA):*

Olsson, P.-I., Dahlin, T., Auken, E., & Fiandaca, G. (2014). Optimizing the acquisition time for time domain spectral IP by measuring during the on-time. In *Proceedings of the 3rd International Workshop on Induced Polarization* (pp. 70-71) <http://ip.geosciences.mines-paristech.fr/>

*Total number of authors:*

4

### General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

## Optimizing the acquisition time for time domain spectral IP by measuring during the on-time

P.-I. Olsson<sup>(1)</sup>, T. Dahlin<sup>(1)</sup>, E. Auken<sup>(2)</sup> and G. Fiandaca<sup>(2)</sup>

(1) *Engineering Geology, Lund University, Sweden*

(2) *Department of Geosciences, Aarhus University, Denmark*

Combined direct current resistivity and time domain induced polarisation (DCIP) measurements are traditionally carried out with a current injection sequence using half of the time for transmission of current and the rest without transmission. With this sequence the resistivity is determined during the on-time and the IP from the potential decay during the off-time. However, if only resistivity is measured some commercial instruments use a square wave current injection, without any off-time between the positive and negative phases of current injection, and are thus able to reduce the time needed for these measurements.

In this paper we show that this approach could be implemented for DCIP measurements by also measuring the IP during the on-time. DCIP measurement using a square wave current injection signal, and measuring the IP response during current transmission, has been modelled numerically and tested in the field against a traditional IP measuring cycle with fifty percent current-on and fifty percent current-off.

The numerical modelling was conducted using superposition of step responses following (Fiandaca et al. 2012, 2013), but with a square waveform (Fig. 1). Sensitivity analysis was carried out in the software AarhusInv (version 6.20) on synthetic models with the square-waveform and the classical waveform. The comparison shows that with the square-waveform approach the IP parameters are resolved at least as well as with the classical approach.

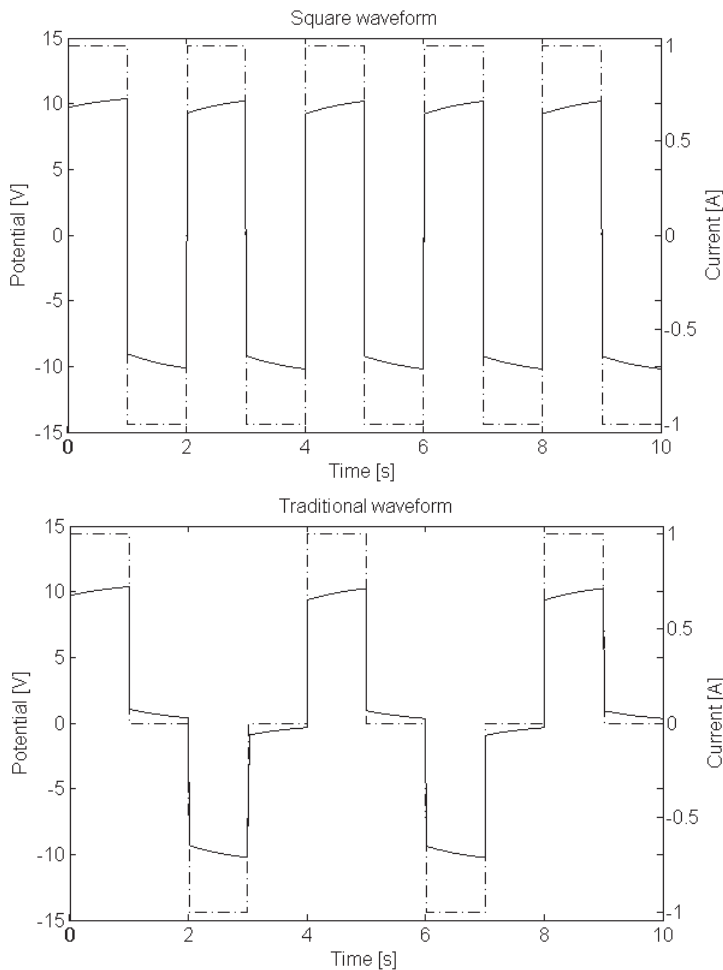


Fig. 1: Modelled waveforms using superposition of step response. The step response is calculated for a homogeneous half space ( $\rho = 50 \Omega m$ ,  $m_0 = 100 mV V^{-1}$ ,  $\tau = 1.0 s$  and  $C = 1.0$ ). The upper diagram shows the square waveform without off-time and the lower diagram shows the traditional waveform. Potential is drawn as solid and current as dash-dotted line.

The field test was done in an environment with Quaternary clayey till overlaying Silurian shale. A dolerite dyke in the shale creates an IP anomaly suited for the experiment. The DCIP

profile (202.5 meters, electrode spacing of 2.5 meters) was centred on top of the known IP anomaly and retrieved using a multiple gradient array (Dahlin and Zhou 2006) and the ABEM Terrameter LS instrument. To improve the IP data quality and reduce capacitive coupling separated cables were used for transmitting current and measuring potentials (Dahlin and Leroux 2012). The positions of all electrodes were determined using a differential GNSS system (Topcon GR3 and SWEPOS network-RTK).

Full waveform recordings from the field test for one of the electrode quadruples can be seen in Fig 2. The field test data show a clear IP effect during the current on time, but at the time of writing a complete processing and evaluation of the results is still ongoing.

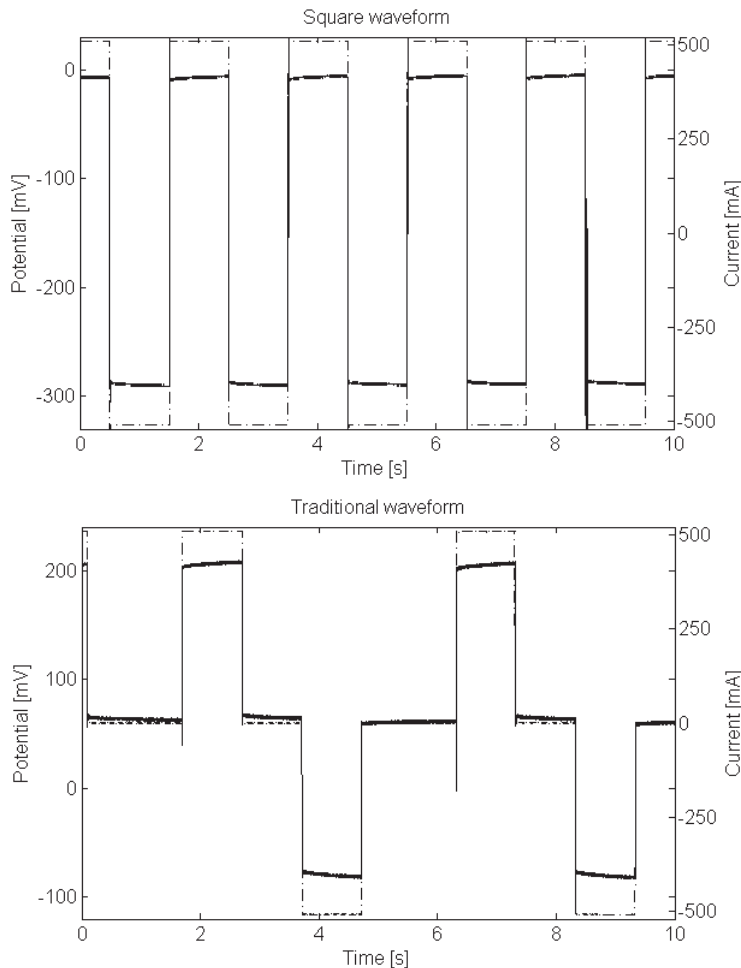


Fig. 2: Full waveform recordings from the field measurements for the same quadruple but with different current injection waveforms. Note that additional current pulses can be transmitted for the same measurement time when using the square waveform compared to the traditional. Potential is drawn as solid and current as dash-dotted line.

Our results support that the approach of using a square wave current injection signal is practically applicable and can reduce the measuring time substantially by measuring the IP-response during the current-on time.

## References

- Dahlin, T. and Leroux, V., 2012. Improvement in time-domain induced polarization data quality with multi-electrode systems by separating current and potential cables. *Near Surface Geophys.*, 10, 545-656.
- Dahlin, T. and Zhou, B., 2006. Multiple-gradient array measurements for multichannel 2D resistivity imaging. *Near Surface Geophys.*, 4, 113-123.
- Fiandaca, G., Auken, E., Christiansen, A.V. and Gazoty, A., 2012. Time-domain-induced polarization: Full-decay forward modeling and 1D laterally constrained inversion of Cole-Cole parameters. *Geophysics*, 77, E213-E225.
- Fiandaca, G., Ramm, J., Binley, A., Gazoty, A., Christiansen, A.V. and Auken, E., 2013. Resolving spectral information from time domain induced polarization data through 2-D inversion. *Geophys. J. Int.*, 192, 631-646.