



LUND UNIVERSITY

Temporal Viability Regulation for Control Affine Systems with Applications to Mobile Vehicle Coordination under Time-Varying Motion Constraints

Greiff, Marcus; Sun, Zhiyong; Robertsson, Anders; Johansson, Rolf

Published in:
The 2019 European Control Conference

DOI:
[10.23919/ECC.2019.8796018](https://doi.org/10.23919/ECC.2019.8796018)

2019

Document Version:
Peer reviewed version (aka post-print)

[Link to publication](#)

Citation for published version (APA):
Greiff, M., Sun, Z., Robertsson, A., & Johansson, R. (2019). Temporal Viability Regulation for Control Affine Systems with Applications to Mobile Vehicle Coordination under Time-Varying Motion Constraints. In *The 2019 European Control Conference* IEEE - Institute of Electrical and Electronics Engineers Inc..
<https://doi.org/10.23919/ECC.2019.8796018>

Total number of authors:
4

General rights

Unless other specific re-use rights are stated the following general rights apply:
Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Temporal viability regulation for control affine systems with applications to mobile vehicle coordination under time-varying motion constraints

Marcus Greiff, Zhiyong Sun, Anders Robertsson and Rolf Johansson

Abstract—Controlled invariant set and viability regulation of dynamical control systems have played important roles in many control and coordination applications. In this paper we develop a *temporal viability regulation theory for general dynamical control systems, and in particular for control affine systems. The time-varying viable set is parameterized by time-varying constraint functions, with the aim to regulate a dynamical control system to be invariant in the time-varying viable set so that temporal state-dependent constraints are enforced. We consider both time-varying equality and inequality constraints in defining a temporal viable set. We also present sufficient conditions for the existence of feasible control input for the control affine systems. The developed temporal viability regulation theory is applied to mobile vehicle coordination.*

I. INTRODUCTION

In practice, control engineering applications often involve various constraints to guarantee system performance or general control efficiency. For example, in autonomous control of robotic manipulators, constraints could be imposed in designing feasible control strategies to ensure collision avoidance, safe human operation, or optimal trajectory generation. In the context of mobile vehicle coordination, a control task usually includes many types of inter-vehicle constraints described by equality/inequality constraints in geometric variables. In general, a control system is often subject to state constraints that limit admissible control inputs which should regulate the possible state-trajectories of the system. Therefore, designing a control input for a dynamical control system that meets the performance requirement or safety guarantees described by certain constraint functions is often a priority before proceeding with a real-time implementation.

A useful tool in dealing with various state-dependent constraints for control systems is controlled invariant theory [1], which has relevance to viability theory [2] for dynamical systems in general. A set is termed ‘controlled invariant’ under a dynamical control system, if the states of the control system are regulated to stay in the set with feasible control actions. Controlled invariant sets, or viable sets, are often parameterized by certain equality/inequality functions to meet system specifications or performance requirements. When a constraint is about to be violated, corrective actions

for the control system should be undertaken that lead to viable control inputs and thus constraints are to be enforced.

The idea of controlled invariant sets and viability regulation for dynamical control systems has been deeply explored in recent years with many insightful and promising applications. Examples include barrier verification of nonlinear and hybrid systems [3], invariance regulation for safety control in robotic systems [4], [5], obstacle avoidance and safety certificate in vehicle navigation control [6], [7], and feasible coordination for multiple mobile vehicle systems under motion constraints [8], [9].

Control systems interacting with a dynamic environment will often involve *time-varying* and state-dependent constraints, which demand time-varying viable functions in specifying temporal performance requirement. We remark that available results in the literature on controlled invariance and viability regulation mostly deal with time-invariant constraints or only state-dependent viable sets. Time-varying constraints have attracted some recent attention for some particular control systems, such as [4], [10]. In this paper, we aim to develop general theories for time-varying viability regulation for general dynamical control systems, and in particular for control affine systems. We will present some conditions for designing a viable control input so that the solutions of a control affine system stay in a viable set defined by some time-varying equality/inequality functions of its state. Applications to mobile vehicle coordination control with time-varying motion constraints will be discussed as illustrative examples of the developed theory.

The main contributions of this paper include a development of temporal viability theory (with motivations of temporal contingent cone in a recent paper [10]), temporal viability regulation, and control law design for controlled temporal invariance of control affine systems. To illustrate their applications, we will consider two typical examples in mobile vehicle coordination control with time-varying motion constraints (in terms of distance and visibility maintenance), and justify their real-time performance guarantees with the developed temporal viability control.

This paper is organized as follows. Section II presents background on standard viability theory. Extensions to temporal viability theory are shown in Section III. In Section IV, we focus on temporal viability regulation for control affine systems. Section V provides certain typical application examples on mobile vehicle coordination under time-varying constraints. Conclusions in Section VI closes this paper.

*The research leading to these results has received funding from the Swedish Science Foundation (SSF) project “Semantic mapping and visual navigation for smart robots” (RIT15-0038).

The authors are members of the LCCC Linnaeus Center and the ELLIIT Excellence Center at Lund University, Sweden. Emails: {marcus.greiff, zhiyong.sun, rolf.johansson, anders.robertsson}@control.lth.se

II. BACKGROUND ON VIABILITY THEORY

This section presents some background of controlled invariance and viability theory from [1], [2], which will motivate the development of temporal viability theory in the next section.

Definition 1. (Viability and viable set) Consider a control system in \mathbb{R}^n described by a differential equation $\dot{x}(t) = f(x(t), u(t))$. A subset $\mathcal{F} \subset \mathbb{R}^n$ enjoys the viability property for the system $\dot{x}(t)$ if for every initial state $x(0) \in \mathcal{F}$, there exists at least one solution to the system starting at $x(0)$ which is viable in the time interval $[0, \bar{t}]$ in the sense that

$$\forall t \in [0, \bar{t}], x(t) \in \mathcal{F}.$$

Also, the set \mathcal{F} is said to be positively invariant if $x(0) \in \mathcal{F}$, then $x(t) \in \mathcal{F} \forall t > 0$. Now define a distance function for a point y to a set \mathcal{F} as $d_{\mathcal{F}}(y) =: \inf_{z \in \mathcal{F}} \|y - z\|$, where $\|\cdot\|$ denotes the Euclidean 2-norm, and consider the definition of contingent cone as follows.

Definition 2. (Contingent cone) Let \mathcal{F} be a nonempty subset of $\mathcal{X} \subset \mathbb{R}^n$ and x belongs to \mathcal{F} . The contingent cone to \mathcal{F} at x is the set

$$T_{\mathcal{F}}(x) = \left\{ v \in \mathcal{X} \mid \liminf_{h \rightarrow 0^+} \frac{d_{\mathcal{F}}(x + hv)}{h} = 0 \right\}. \quad (1)$$

It is obvious that the set $T_{\mathcal{F}}(x)$ is non-trivial only on the boundary of \mathcal{F} .¹

A key result in the set-invariance analysis, the celebrated Nagumo theorem, is stated as follows (see [1] or [2]).

Theorem 1. (Nagumo theorem) Consider the system $\dot{x}(t) = f(x(t))$, and assume that, for each initial condition in a set $\mathcal{X} \subset \mathbb{R}^n$, it admits a globally unique solution. Let $\mathcal{F} \subset \mathcal{X}$ be a closed and convex set. Then the set \mathcal{F} is positively invariant for the system if and only if

$$f(x(t)) \in T_{\mathcal{F}}(x), \quad \forall x \in \mathcal{F}, \quad (2)$$

where $T_{\mathcal{F}}(x)$ denotes the contingent cone of \mathcal{F} at x .

Generalizations of the Nagumo theorem and viability theory are also possible, by using the set-valued analysis [11] and differential inclusion [12].

If x is an interior point in the set \mathcal{F} , then $T_{\mathcal{F}}(x) = \mathbb{R}^n$. Therefore, the condition in Theorem 1 is only meaningful when $x \in \text{bnd}(\mathcal{F})$, where $\text{bnd}(\mathcal{F})$ denotes the boundary of \mathcal{F} . Thus, the condition in (2) can be equivalently stated as

$$f(x(t)) \in T_{\mathcal{F}}(x), \quad \forall x \in \text{bnd}(\mathcal{F}). \quad (3)$$

The above condition clearly has an intuitive and geometric interpretation: if at $x \in \text{bnd}(\mathcal{F})$, the derivative $\dot{x}(t) = f(x(t))$ points inside or is tangent to \mathcal{F} , then the trajectory $x(t)$ remains in \mathcal{F} .

¹It has been shown in [1] that though the distance function $d_{\mathcal{F}}(y)$ depends on the considered norm, the set $T_{\mathcal{F}}(x)$ does not.

III. THEORY OF TEMPORAL VIABILITY

In this section we present several general concepts on temporal viability and develop some novel results on controlled temporal invariance (termed ‘temporal viability regulation’) for dynamical control systems.

Consider the following time-varying control dynamical system described by a general ordinary differential equation

$$\dot{x}(t) = f(x(t), u(t), t), \quad (4)$$

where $x \in \mathbb{R}^n$ is the state variable, $u \in \mathbb{R}^l$ is the control input vector, and $f \in \mathbb{R}^n$ is a (possibly time-varying) vector field of the state $x(t)$, control input $u(t)$ and the time t .

Following the conventional definition of viability theory and viable set [2], we define *temporal viability* and *time-varying viable set* as follows.

Definition 3. (Temporal viability and time-varying viable set) Consider a control system described by a differential equation $\dot{x}(t) = f(x(t), u(t), t)$ in (4). A subset $\mathcal{F}(t) \subset \mathbb{R}^n$ enjoys the temporal viability property for the system $\dot{x}(t)$ under the time interval $t \in [\tilde{t}, \bar{t}]$ if for every initial state $x(\tilde{t}) \in \mathcal{F}(\tilde{t})$ at time \tilde{t} , there exists at least one solution to the system starting at $x(\tilde{t})$ which is viable in the time interval $[\tilde{t}, \bar{t}]$ in the sense that

$$\forall t \in [\tilde{t}, \bar{t}], x(t) \in \mathcal{F}(t).$$

The set $\mathcal{F}(t)$ is then termed a *time-varying viable set* for the dynamical control system (4).

In the following, without loss of generality we will assume the initial time $\tilde{t} = 0$. The time \bar{t} then denotes the maximum existence time that extends the solution of the dynamical system (4). If the solution of the dynamical system (4) can be extended to infinity, we may also consider all the positive time $\bar{t} \rightarrow \infty$. When a differential equation that models a dynamical control system involves discontinuous right-hand side (e.g., switching controls), we understand its solutions in the sense of Filippov [13].

We define a distance function for a point y to a (possibly time-varying) set $\mathcal{F}(t)$ as $d^t(y, \mathcal{F}(t)) =: \inf_{z \in \mathcal{F}(t)} \|y - z\|$ at time t . Following [12] and [10], one can define the temporal contingent cone as follows.

Definition 4. (Temporal contingent cone) Let $\mathcal{F}(t)$ be a nonempty subset of $\mathcal{X} \subset \mathbb{R}^n$ and $x(t)$ belongs to $\mathcal{F}(t)$ at time $t = \hat{t}$. The temporal contingent cone² to $\mathcal{F}(t)$ at $x(t)$ and time \hat{t} is the set

$$T_{\mathcal{F}}^{\hat{t}}(x) = \left\{ v \in \mathcal{X} \mid \liminf_{h \rightarrow 0^+} \frac{d^{\hat{t}}(x(\hat{t}) + hv, \mathcal{F}(\hat{t} + h))}{h} = 0 \right\}. \quad (5)$$

Now consider a (possibly time-varying) set \mathcal{F} parameterized by an inequality constraint of a time-varying real vector

²We remark that, as has been shown in [10], the temporal contingent cone is not necessarily a cone. Similarly to [10], we follow the convention and term it ‘temporal contingent cone’ as it reduces to the standard contingent cone in Definition 2 when the set \mathcal{F} is time independent.

function $g(x(t), t) : \mathbb{R}^n \times \mathbb{R} \rightarrow \mathbb{R}^m$:

$$\mathcal{F}(t) = \{(x(t), t) | g(x(t), t) \leq 0\}. \quad (6)$$

We impose the following assumption on the vector function g for deriving a well-defined temporal contingent cone with favourable properties.

Assumption 1. *The function $g : \mathbb{R}^n \times \mathbb{R} \rightarrow \mathbb{R}^m$ is a C^1 (i.e., continuously differentiable) function of the state variable $x(t)$, and is Lipschitz continuous with respect to the time variable t .*

The following result characterizes an explicit formula of temporal contingent cone $T_{\mathcal{F}}^t(x)$ when the set $\mathcal{F}(t)$ is parameterized by time-varying functions $g(x(t), t)$ as in (6) under Assumption 1.

Lemma 1. *Consider the time-varying set $\mathcal{F}(t)$ parameterized by time-varying functions $g(x(t), t)$ in (6). Assume that the Jacobian matrix $\nabla_x g(x(t), t)^T$ is of full rank for the points $(x(t), t)$ with $g(x(t), t) = 0$. Then the temporal contingent cone is described by*

$$T_{\mathcal{F}}^t(x) = \mathbb{R}^n, \quad \forall \{(x(t), t) | g(x(t), t) < 0\}, \quad (7)$$

and

$$T_{\mathcal{F}}^t(x) = \left\{ v \left| \begin{bmatrix} (\nabla_x g(x(t), t))^T \\ \nabla_t g(x(t), t) \end{bmatrix} \begin{bmatrix} v \\ 1 \end{bmatrix} \leq 0 \right. \right\}, \quad \forall \{(x(t), t) | g(x(t), t) = 0\}. \quad (8)$$

A detailed calculation of the contingent cone and the proof is omitted here. The case with active constraint (the set under (8)) has also been discussed in [10]. If a subset of the inequality constraint of the vector function g becomes active, then the formula (8) in Lemma 1 applies to only the subset of active inequality constraints.

Remark 1. *A non-empty temporal contingent cone $T_{\mathcal{F}}^t(x)$ for all time t is a necessary condition to ensure the existence of the control input $u(t)$ associated with the time-varying vector field $f(x(t), u(t), t)$. A sufficient condition to guarantee non-empty $T_{\mathcal{F}}^t(x)$ along the solution $x(t)$ and time t is the forward Lipschitz continuity of the set $\mathcal{F}(t)$ with respect to time t (see [10, Theorem 1]). According to [10, Proposition 4], a sufficient condition to ensure the forward Lipschitz continuity of the set $\mathcal{F}(t)$ is (i) the gradient vector $\nabla_x g(x(t), t)$ has full rank, and (ii) the time-varying function $g(x(t), t)$ is Lipschitz continuous in t . In this paper we may occasionally further suppose $g(x(t), t)$ is a C^1 function of both the state $x(t)$ and time t ,³ which automatically guarantees the second condition. By imposing Assumption 1, in the following we always ensure that the set $\mathcal{F}(x(t), t)$ parameterized by a set of inequality/equality constraints of the time-varying function $g(x(t), t)$ is forward Lipschitz continuous.*

Now we present the first main result of this paper.

³Extensions to piece-wise C^1 functions are also possible, which we retain for future research.

Theorem 2. (Controlled temporal invariant set) *Consider a forward Lipschitz continuous time-varying set $\mathcal{F}(t)$ parameterized by an inequality constraint of time-varying functions $g(x(t), t) : \mathcal{F}(t) = \{(x, t) | g(x(t), t) \leq 0\}$. Then the set $\mathcal{F}(t)$ is positively temporal invariant under the dynamical control system $\dot{x}(t)$, $t \in [0, \bar{t}]$, of (4) if $x(0) \in \mathcal{F}(0)$, and $\dot{x}(t) = f(x(t), u(t), t) \in T_{\mathcal{F}}^t(x)$ with the temporal contingent cone $T_{\mathcal{F}}^t(x)$ derived in Lemma 1. Equivalently, to guarantee the controlled temporal invariance of the set $\mathcal{F}(t)$, the (possibly time-varying) vector function f should satisfy*

$$f(x(t), u(t), t) \in \mathbb{R}^n, \quad \forall x(t) : g(x(t), t) < 0, \forall t \in [0, \bar{t}], \quad (9)$$

or

$$\begin{aligned} \nabla_x g(x(t), t)^T f(x(t), u(t), t) + \nabla_t g(x(t), t) &\leq 0, \\ \forall x(t) : g(x(t), t) = 0, \forall t &\in [0, \bar{t}]. \end{aligned} \quad (10)$$

Proof: The proof is based on the explicit formulas in Lemma 1 that characterizes the set of temporal contingent cone along time. Forward Lipschitz continuity of the set $\mathcal{F}(t)$, which is guaranteed by Assumption 1 on the constraint function $g(x(t), t)$ and full rank of $\nabla_x g(x(t), t)$, implies a non-empty set of temporal contingent cone:

$$T_{\mathcal{F}}^t(x) \neq \emptyset, \forall t \in [0, \bar{t}]. \quad (11)$$

The necessary and sufficient condition to ensure that the time-varying set $\mathcal{F}(t)$ is viable under the time-varying control system $\dot{x}(t) = f(x(t), u(t), t)$ is

$$f(x(t), u(t), t) \cap T_{\mathcal{F}}^t(x) \neq \emptyset, \forall t \in [0, \bar{t}]. \quad (12)$$

When the time-varying constraint functions are inactive in the sense that $g(x(t), t) < 0$, the temporal contingent cone is the whole space $T_{\mathcal{F}}^t(x) = \mathbb{R}^n$, which implies that the time-varying vector function can be any vector $f(x(t), u(t), t) \in \mathbb{R}^n$. When $g(x(t), t) = 0$ at which constraint functions become active, the temporal contingent cone formula in (8) renders an equivalent formulation as in (10) to ensure that the viability condition of (12) is always satisfied. The control input (10) serves corrective actions that regulate the states of the dynamical system \dot{x} to be controlled temporal invariant in the set $\mathcal{F}(t)$. \square

The above theorem extends the Nagumo theorem and standard results in controlled invariance theory (see e.g., [1]).

IV. TEMPORAL VIABILITY REGULATION FOR CONTROL AFFINE SYSTEMS

In this section we will focus on the control affine system described by the following general form

$$\dot{p}(t) = f_0(p(t)) + \sum_{j=1}^l f_j(p(t))u_j(t), \quad (13)$$

where $p \in \mathbb{R}^n$ is the system state, f_0 is a smooth drift function term, u_j is the scalar control input (possibly time-varying) associated with the smooth vector field f_j , and l is the number of vector field functions. Such a nonlinear control

affine system (13) with a drift term is very general in that it describes many different types of vehicle dynamics and control systems, including control systems subject to under-actuation or nonholonomic motion constraints, as we will show in the next section. We remark that a nonlinear control affine system (13) with drifts can be equivalently described by the following *affine* distribution (see e.g., [14] and [15])

$$\Delta = f_0 + \text{span}\{f_1, f_2, \dots, f_l\}. \quad (14)$$

When specializing the temporal viability theory to control affine systems (13), one obtains the following theorem on temporal viability regulation.

Theorem 3. (Temporal viability regulation) *Consider a forward Lipschitz continuous time-varying set $\mathcal{F}(t)$ parameterized by an inequality constraint of time-varying functions $g(p(t), t)$: $\mathcal{F}(t) = \{(p, t) | g(p, t) \leq 0\}$. The set $\mathcal{F}(t)$ is controlled temporal viable under the control affine system $\dot{p}(t)$, $t \in [0, \bar{t}]$, of (13) if $p(0) \in \mathcal{F}(0)$ and the control input u_j satisfies (whenever the inequality $g(p(t), t) = 0$ is active):*

$$\begin{aligned} & \sum_{j=1}^l u_j \nabla_p g(p(t), t)^T f_j(p(t)) \\ & \leq -\nabla_p g(p(t), t)^T f_0(p(t)) - \nabla_t g(p(t), t), \\ & \forall p(t) : g(p(t), t) = 0, \forall t \in [0, \bar{t}]; \end{aligned} \quad (15)$$

and when the inequality constraint is inactive the control input takes arbitrary value in the sense that $u_j \in \mathbb{R}, j = 1, \dots, l$.

The above theorem can be obtained as a consequence of Theorem 2, and a proof is omitted for space consideration.

A. Special Case: Viability Regulation under Time-varying Equality Constraints

Now we consider a special case that the $\mathcal{F}(t)$ is parameterized by time-varying *equality* constraints:

$$\mathcal{F}(t) = \{(p(t), t) | g(p(t), t) = 0\}, \quad (16)$$

where $g : \mathbb{R}^n \times \mathbb{R} \rightarrow \mathbb{R}^m$ is a C^1 vector function of the state $p(t)$ and is Lipschitz continuous with respect to the time t . Following Theorem 3 we have the following result.

Lemma 2. *Consider a forward Lipschitz continuous time-varying set $\mathcal{F}(t)$ parameterized by time-varying equality constraint in (16). The set $\mathcal{F}(t)$ is controlled temporal viable under the control affine system $\dot{p}(t)$ of (13) if $p(0) \in \mathcal{F}(0)$ and the control input u_j satisfies*

$$\begin{aligned} & \sum_{j=1}^l u_j \nabla_p g(p(t), t)^T f_j(p(t)) \\ & = -\nabla_p g(p(t), t)^T f_0(p(t)) - \nabla_t g(p(t), t). \end{aligned} \quad (17)$$

The above lemma recovers the main result in a recent paper [16]. In the case of time-varying equality constraint, the control input condition in (17) should satisfy a much more restrictive condition (in terms of equality) than that in

the case of time-varying set parameterized by inequality constraint. The following lemma presents a sufficient condition to ensure the existence of the control input in (17). The proof will be supplied in the full version of this paper.

Lemma 3. *Suppose that the set $\mathcal{F}(t)$ is forward Lipschitz continuous, and that the distribution $\text{span}\{f_1, f_2, \dots, f_l\}$ obtained from the l vector field functions $f_1(p(t)), f_2(p(t)), \dots, f_l(p(t))$ is of full row rank at the point $p = p(t)$. Then the control inputs u_j always exist for (17) that guarantees temporal viability regulation.*

The above lemma only shows a sufficient yet strong condition for guaranteeing existence of viable controls. Other weaker sufficient conditions also exist, and a detailed characterization of viable control input will be in the future research. In practice, analytical solutions may be hard to obtain since the solving of (17) involves algebraic equations of both system states and the time. In this way, available symbolic computational approaches (see e.g., [17]) can be used to find admissible and viable control input for a specified dynamical system. The following example will be treated using symbolical tools, but the reader is referred to [9] for a heuristic solving algorithm and a set of illustrative and analytically computed solutions for the time-invariant case.

V. APPLICATION STUDY: VEHICLE COORDINATION WITH TIME-VARYING MOTION CONSTRAINTS

In this section, we apply the developed theory on temporal viability regulation to coordinate two unicycle vehicles, subject to time-varying equality and inequality motion constraints on their joint state. First, we give the relevant vehicle models, whose kinematics can be equivalently formulated as (A) time-invariant kinematic equality constraints. We then proceed to detail (B) time-varying velocity equality constraints, (C) time-varying inequality constraints on the inter-vehicle distance and (D) a time-varying visibility inequality constraint. Finally, we present a closed-loop simulation where the system controls are regulated in accordance with Theorem 3 subject to (A)-(D), thereby yielding a state trajectory which satisfies all constraints at all times $t \in [0, \bar{t}]$.

A. Vehicle Models

Consider a unicycle model, described by the equations

$$\begin{aligned} \dot{x}_i &= v_i \cos(\theta_i), \\ \dot{y}_i &= v_i \sin(\theta_i), \\ \dot{\theta}_i &= u_i, \end{aligned} \quad (18)$$

where the state of system i is configured on $[x_i, y_i, \theta_i]^T \in \mathbb{R}^2 \times \mathbb{S}^1 \subset \mathbb{R}^3$. This kinematic equation can be equivalently stated by the annihilating codistribution (with each row corresponding to a row co-vector)

$$\Omega_{K,i} := \sin(\theta_i) dx_i - \cos(\theta_i) dy_i. \quad (19)$$

In this example, we consider coordination of n such vehicles, whose joint states are denoted $p(t) \in \mathbb{R}^{2n} \times \mathbb{S}^n$, where then

$$\Omega_{K,i} \dot{p} = 0, \quad \forall i \in 0, \dots, n. \quad (20)$$

B. Time-varying Velocity Equality Constraints

In the context of temporal viability regulation, it may be useful to restrict certain parts of the joint state to desired state trajectories. To see how, let $v_{i,r}(t), u_{i,r}(t) \in C^0$ define a desired reference trajectory of the i^{th} vehicle, which, similar to (19), may be expressed by the annihilating codistribution

$$\cos(\theta_i)dx_i + \sin(\theta_i)dy_i = v_{i,r}(t), \quad d\theta_i = u_{i,r}(t),$$

here written compactly with $\Omega_{E,i}\dot{p} = T_{E,i}$, where then

$$\Omega_{E,i} = \begin{bmatrix} \cos(\theta_i)dx_i + \sin(\theta_i)dy_i \\ d\theta_i \end{bmatrix}, \quad T_{E,i} = \begin{bmatrix} v_{i,r}(t) \\ u_{i,r}(t) \end{bmatrix}. \quad (21)$$

C. Time-Varying Distance Inequality Constraints

In mobile vehicle coordination tasks, it is often useful to pose inequality constraints on inter-vehicular distance. Let

$$\frac{1}{2}d_{ij}^-(t)^2 \leq \frac{1}{2}(x_i - x_j)^2 + \frac{1}{2}(y_i - y_j)^2 \leq \frac{1}{2}d_{ij}^+(t)^2$$

for some time-varying lower and upper bounds $0 \leq d_{ij}^-(t) < d_{ij}^+(t)$, which may be expressed as a vector valued inequality

$$g_{ij}^d(p, t) := \frac{1}{2} \begin{bmatrix} +(x_i - x_j)^2 + (y_i - y_j)^2 - d_{ij}^+(t)^2 \\ -(x_j - x_i)^2 - (y_j - y_i)^2 + d_{ij}^-(t)^2 \end{bmatrix} \leq 0.$$

The utility of such a constraint cannot be under-stated, as the time-varying constraints may be dynamically updated when interacting with the environment with $d_{ij}^-(t)$ and $d_{ij}^+(t)$ being C^1 functions of time. The constraint can be written on the form of Theorem 3, as $\Omega_{I,i}^d \dot{p} \leq T_{I,i}^d$ where

$$\begin{aligned} \Omega_{I,i}^d &:= \nabla_p g_{ij}^d(p, t) \\ &= \begin{bmatrix} (x_i - x_j)(dx_i - dx_j) + (y_i - y_j)(dy_i - dy_j) \\ (x_j - x_i)(dx_i - dx_j) + (y_j - y_i)(dy_i - dy_j) \end{bmatrix}, \\ T_{I,i}^d &:= -\nabla_t g_{ij}^d(p, t) = \begin{bmatrix} +d_{ij}^+(t)\dot{d}_{ij}^+(t) \\ -d_{ij}^-(t)\dot{d}_{ij}^-(t) \end{bmatrix}. \end{aligned} \quad (22)$$

where we have used the standard dual bases $\{dx_i, dy_i, d\theta_i, dx_j, dy_j, d\theta_j\}$ in representing the annihilating codistribution associated with the gradient vector.

D. Time-Varying Visibility Inequality Constraints

The second class of inequality constraint under consideration is a visibility constraint posed on the relative rotation of vehicles, presented in a time-invariant form in [9]. Here, the cosine angle of the body direction of system j , $b_j := [\cos(\theta_j), \sin(\theta_j)]$, and the the direction of system i relative to j , $a_{ij} := [x_i - x_j, y_i - y_j]$ is bounded (see Fig. 1). In other words, we enforce a constraint on the time-varying apex angle, $2\alpha_{ij}(t)$, defining a cone of visibility of system j , such that

$$g_{ij}^v(p, t) := \cos(\alpha_{ij}(t)) - \frac{\langle a_{ij}, b_j \rangle}{\langle a_{ij}, a_{ij} \rangle^{1/2}} \leq 0.$$

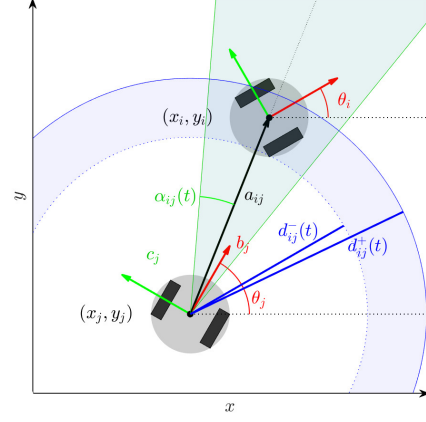


Fig. 1: Illustration of a visibility inequality constraint, $g_{ij}^v(p, t)$, bounding the direction b_j to the green cone defined by the vector a_{ij} and the half apex angle α_{ij} , and the two-sided distance inequality constraint (blue).

By letting $c_j := [-\sin(\theta_j), \cos(\theta_j)]$, the associated annihilating codistribution of this inequality constraint becomes

$$\begin{aligned} \Omega_{I,i}^v &:= \nabla_p g_{ij}^v(p, t) \\ &= \frac{\langle a_{ij}, c_j \rangle}{\sqrt{\langle a_{ij}, a_{ij} \rangle}} \left(\frac{1}{\langle a_{ij}, a_{ij} \rangle} \left\langle a_{ij}, \begin{bmatrix} dx_i - dx_j \\ dy_j - dy_i \end{bmatrix} \right\rangle + d\theta_j \right). \\ T_{I,i}^v &:= -\nabla_t g_{ij}^v(p, t) = \sin(\alpha_{ij}(t))\dot{\alpha}_{ij}(t). \end{aligned} \quad (23)$$

With these general descriptions of the annihilating codistributions associated with the time-varying constraints, we proceed to show how they may be implemented in practice.

E. Coordination with Time-varying Constraints

We now tackle the challenging task of controlling a system consisting of $n = 2$ unicycle vehicles subject to constraints on the form (A)-(D) posed on the joint state of the vehicles, $p(t) \in \mathbb{R}^4 \times \mathbb{S}^2$. We use the following seven constraints

$$\begin{aligned} \Omega_{K,i}\dot{p} &= 0, \quad i = 1, 2, & \text{(see (20))} \\ \Omega_{E,1}\dot{p} &= T_{E,1}, & \text{(see (21))} \\ \Omega_{I,12}^d\dot{p} &\leq T_{I,12}^d, & \text{(see (22))} \\ \Omega_{I,12}^v\dot{p} &\leq T_{I,12}^v, & \text{(see (23))} \end{aligned}$$

with the right hand side defined by arbitrary five time-varying functions, here for illustrative purpose chosen as

$$v_{1r}(t) = |2 \sin(2t)|, \quad (24a)$$

$$u_{1r}(t) = 0.7^{-1}v_{1r}(t) \tan(2 \sin(t) \cos(t)), \quad (24b)$$

$$d_{12}^+(t) = 1.2 + 0.1 \sin(5t), \quad (24c)$$

$$d_{12}^-(t) = 0.9 - 0.1 \sin(t), \quad (24d)$$

$$\alpha_{12}(t) = 0.1 + 0.05 \sin(2t). \quad (24e)$$

In effect, this set of constraints result in both vehicles satisfying the kinematic equations of a unicycle in Equation (18), while vehicle $i = 1$ follows a path given by $v_{1r}(t), u_{1r}(t)$,

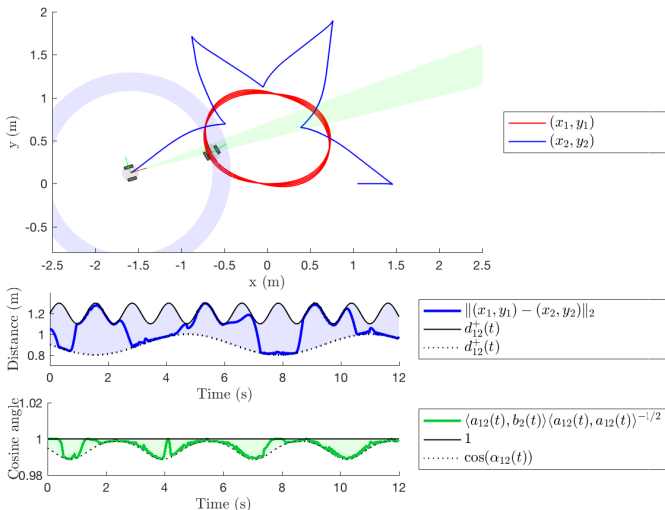


Fig. 2: *Top*: Positional state trajectories of the vehicles, $i = 1$ (red) and $i = 2$ (blue), with the inequality constraints in distance (blue) and visibility (green) at the time $t = 12$. *Center*: The time-varying distance inequality constraint (center). *Bottom*: The narrow time-varying visibility constraint.

and vehicle $i = 2$ maintains a set of time-varying inequality constraints with respect to the vehicle $i = 1$.

For every possible combination of active inequality constraints, the resulting set of algebraic equations in Theorem 3 are solved symbolically offline. In our case, there is a total of three inequality constraints, generating eight combinations of possible active constraints. Each of these solutions will be associated with varying degrees of freedom, $l = 0, 1, 2$, in which we may choose any $U(t) \in \mathbb{R}^l$ with elements $\mu_j(t)$ (solutions to the derived algebraic inequality) such that Theorem 3 is satisfied at a time t . In the simulation, we restrict $U(t) \in [-3, 3]^l$ and simply pick the controls which minimizes $\|U(t)\|_\infty$ subject to the active algebraic constraints. Instead, these virtual control inputs may be selected to minimize a cost on the state or achieve some sense of robustness, but this is left for future research.

Studying the simulation result in Fig. 2 and Fig 3, it is clear that the time-varying inequality constraints on the intervehicular distance and the visibility are met at all times. The choice of $\alpha_{12}(t)$ generates a very narrow cone of visibility at certain points in time. Despite this, one or more of the inequality constraints are saturated at almost all times, and the equality constraints are all satisfied to machine precision.

VI. CONCLUSIONS

In this paper, we discuss temporal viability regulation for general dynamical control systems with a particular focus on control affine systems. The aim is to address typical control scenarios and provide a constructive approach to enforcing a time-varying set of equalities and/or inequalities on the state. We present control laws for ensuring temporal viability and controlled invariance for arbitrary control affine systems

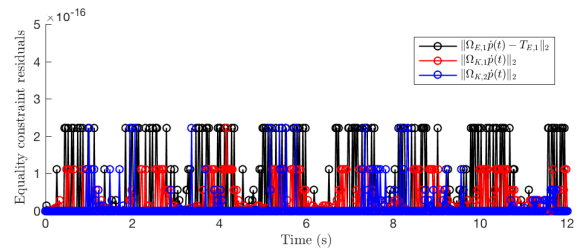


Fig. 3: Residuals of the equality constraints in the two-norm.

with time-varying viable set constraints, and illustrate the proposed theory by an example with homogeneous mobile vehicle coordination under time-varying motion constraints.

ACKNOWLEDGEMENT

The authors would like to thank Prof. Daniel Zelazo for suggesting [10], and for insightful discussions on this topic.

REFERENCES

- [1] F. Blanchini, “Set invariance in control,” *Automatica*, vol. 35, no. 11, pp. 1747–1767, 1999.
- [2] J.-P. Aubin, *Viability theory*. Berlin Heidelberg: Springer Science & Business Media, 2009.
- [3] S. Prajna and A. Rantzer, “Convex programs for temporal verification of nonlinear dynamical systems,” *SIAM Journal on Control and Optimization*, vol. 46, no. 3, pp. 999–1021, 2007.
- [4] M. Kimmel and S. Hirche, “Invariance control with time-varying constraints,” in *Proc. of the 2016 European Control Conference (ECC)*, pp. 867–872, IEEE, 2016.
- [5] M. Kimmel and S. Hirche, “Invariance control for safe human–robot interaction in dynamic environments,” *IEEE Transactions on Robotics*, vol. 33, no. 6, pp. 1327–1342, 2017.
- [6] D. Panagou, D. M. Stipanović, and P. G. Voulgaris, “Distributed coordination control for multi-robot networks using Lyapunov-like barrier functions,” *IEEE Transactions on Automatic Control*, vol. 61, no. 3, pp. 617–632, 2016.
- [7] L. Wang, A. D. Ames, and M. Egerstedt, “Safety barrier certificates for collisions-free multirobot systems,” *IEEE Transactions on Robotics*, vol. 33, no. 3, pp. 661–674, 2017.
- [8] Z. Sun, M. Greiff, A. Robertsson, and R. Johansson, “Feasible coordination of multiple homogeneous or heterogeneous mobile vehicles with various constraints,” in *Proc. of the 2019 International Conference on Robotics and Automation (ICRA’19), Montreal, Canada*, IEEE, May 20–24, 2019.
- [9] Z. Sun, M. Greiff, A. Robertsson, and R. Johansson, “Feasibility and coordination of multiple mobile vehicles with mixed equality and inequality constraints,” *arXiv preprint arXiv:1809.05509*, 2018.
- [10] A. Hauswirth, I. Subotić, S. Bolognani, G. Hug, and F. Dörfler, “Time-varying projected dynamical systems with applications to feedback optimization of power systems,” *arXiv preprint arXiv:1809.07288*, 2018.
- [11] R. T. Rockafellar and R. J.-B. Wets, *Variational analysis*. Berlin: Springer Science & Business Media, 2009.
- [12] J.-P. Aubin and H. Frankowska, *Set-valued analysis*. Boston: Springer Science & Business Media, 2009.
- [13] J. Cortes, “Discontinuous dynamical systems,” *IEEE Control Systems*, vol. 28, no. 3, pp. 36–73, 2008.
- [14] A. Isidori, *Nonlinear control systems*. London: Springer Science & Business Media, 1995.
- [15] H. Nijmeijer and A. Van der Schaft, *Nonlinear dynamical control systems*. New York: Springer, 1990.
- [16] T. Yuno and E. Zera, “Controlled invariant for 1D and 2D time-varying nonlinear control systems,” in *Proc. of The 23rd International Symposium on Mathematical Theory of Networks and Systems (MTNS’18)*, (Hong Kong, China), pp. 255–258, July 16–20, 2018.
- [17] H. G. Kwatny and G. Blankenship, *Nonlinear Control and Analytical Mechanics: a computational approach*. New York: Springer Science & Business Media, 2000.