



LUND UNIVERSITY

Direct and inverse scattering for transient electromagnetic waves in nonlinear media

Sjöberg, Daniel; Kristensson, Gerhard; Wall, David J. N.

Published in:

[Host publication title missing]

1998

[Link to publication](#)

Citation for published version (APA):

Sjöberg, D., Kristensson, G., & Wall, D. J. N. (1998). Direct and inverse scattering for transient electromagnetic waves in nonlinear media. In *[Host publication title missing]* (Vol. II, pp. 587-589). URSI Commission B.

Total number of authors:

3

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

DIRECT AND INVERSE SCATTERING FOR TRANSIENT ELECTROMAGNETIC WAVES IN NONLINEAR MEDIA

Daniel Sjöberg, Gerhard Kristensson

Department of Electromagnetic Theory, Lund University, P.O. Box 118, S-221 00 Lund, Sweden

David J.N. Wall

Department of Mathematics and Statistics University of Canterbury, Christchurch, New Zealand

Abstract: This paper discusses a time domain approach to the solution of the inverse scattering problem in nonlinear materials. Two different reconstruction algorithms are presented.

PREREQUISITES

In a source-free environment the Maxwell equations in one dimension are

$$\begin{aligned}\partial_z E(z, t) + \partial_t B(z, t) &= 0 \\ \partial_z H(z, t) + \partial_t D(z, t) &= 0.\end{aligned}$$

where E , B , H and D denotes the field amplitudes. In this paper we assume that the nonlinear constitutive relations are

$$\begin{aligned}D(z, t) &= \epsilon_0 F_e(E(z, t)) \\ B(z, t) &= \frac{1}{c_0} F_m(\eta_0 H(z, t)).\end{aligned}$$

The functions F_e and F_m are assumed to model a passive medium. For a non-magnetic material, a sufficient condition on F_e is [1]

$$F_e'(x) \geq a > 0.$$

In this paper we also assume that $F_m'(x) \geq b > 0$. It is convenient to transform the dynamics into

$$\partial_t \begin{pmatrix} u^+ \\ u^- \end{pmatrix} + c(u^+, u^-) \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix} \partial_z \begin{pmatrix} u^+ \\ u^- \end{pmatrix} = 0.$$

where the Riemann invariants u^\pm are

$$\begin{aligned}u^+ &= \frac{1}{2} (g_e(E) + g_m(\eta_0 H)) = \frac{1}{2} \left(\int_0^E \sqrt{F_e'(x)} dx + \int_0^{\eta_0 H} \sqrt{F_m'(x)} dx \right) \\ u^- &= \frac{1}{2} (g_e(E) - g_m(\eta_0 H)) = \frac{1}{2} \left(\int_0^E \sqrt{F_e'(x)} dx - \int_0^{\eta_0 H} \sqrt{F_m'(x)} dx \right).\end{aligned}$$

and the wave speed c is

$$c(u^+, u^-) = \frac{c_0}{g_e'(g_e^{-1}(u^+ + u^-))g_m'(g_m^{-1}(u^+ - u^-))}.$$

PROPAGATION ALONG CHARACTERISTICS

We can solve the propagation problem via the method of characteristics. A characteristic curve is defined by $(z, t) = (\zeta^\pm(\tau), \tau)$, where ζ^\pm satisfy

$$\frac{d\zeta^\pm}{d\tau} = \pm c(u^+, u^-) \Big|_{(z,t)=(\zeta^\pm(\tau), \tau)}.$$

The fields $u^\pm(z, t)$ are constant along these curves ζ^\pm . The characteristic curve ζ^+ is a straight line provided the field u^- is constant in the slab, and vice versa.

A numerical example of one-way wave propagation is depicted in Figure 1. Notice that the pulse steepens at the trailing edge, as a consequence of a wave speed which decreases with increasing field strength.

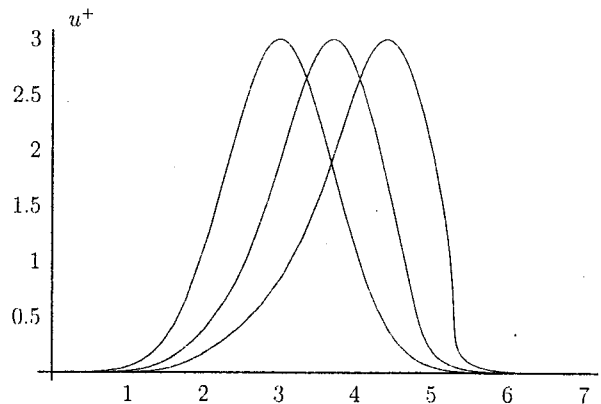


Figure 1: The propagation of an incident pulse $u^+(0, t) = 3H(t) \exp\{-(t - 3)^2\}$. The material model is a Kerr saturation model $F(E) = E + 4E^3/(E^2 + 1)$. Three different propagation distances, $z = \ell$, values are shown, with $\ell = 0, 0.3$, and $\ell = 0.6$. In this example, we are using a numerically scaled field, which is the reason for large parameter values.

RECONSTRUCTIONS USING INTERNAL FIELDS

Provided the medium only supports one type of waves, *e.g.*, u^+ waves, the wave speed depends on only one field, and an explicit reconstruction algorithm can be found for pulses with no shocks [1]. The explicit result is

$$c(\xi) = \ell / (\bar{u}^{-1}(\xi) - h^{-1}(\xi)), \quad t > \ell/c(\xi_0).$$

Here, the incident field at $z = 0$ is denoted $u^+(0, t) = h(t)$ and the internal field at $z = \ell$ is denoted $u^+(\ell, t) = \bar{u}(t)$. Moreover, the time t and the parameter ξ are related by $t = \bar{u}^{-1}(\xi)$ and $\xi_0 = h(0)$.

RECONSTRUCTIONS USING EXTERNAL FIELDS

In the previous section the reconstruction of the wave speed from the internal field was presented. The underlying assumption there was the one-way wave propagation. In this section, we consider a slab located between $z = 0$ and $z = \ell$.

The internal fields, u^\pm , on the boundary of the slab can be related to the external incident, reflected, and transmitted fields, E^i , E^r , and E^t , respectively. The explicit expressions when the field impinges from the left are, for $z = 0$ and $z = \ell$, respectively

$$\begin{cases} E^i + E^r = g_e^{-1}(u^+ + u^-) \\ E^i - E^r = g_m^{-1}(u^+ - u^-) \end{cases} \quad \begin{cases} E^t = g_e^{-1}(u^+ + u^-) \\ E^t = g_m^{-1}(u^+ - u^-) \end{cases}$$

Provided the left-going field inside the slab can be neglected, *i.e.*, $u^- \approx 0$, we essentially have wave propagation along straight characteristics. In this section we assume that this is the case, which is reasonable if the scattering properties at the edges are small, and it also seems to be connected to the strength of the nonlinearity. An important consequence of this assumption is that equal amplitudes of the u^+ field travel with equal speeds. Since there is a one to one correspondence between internal and external fields, this observation can be used to obtain the wave speed from transmission data.

If we denote the measurable quantities $E^i + E^r$ and $E^i - E^r$ by e and h , and neglect the left propagating field at the left boundary ($0 = u^- = g_e(e) - g_m(h)$ at $z = 0$), we can experimentally

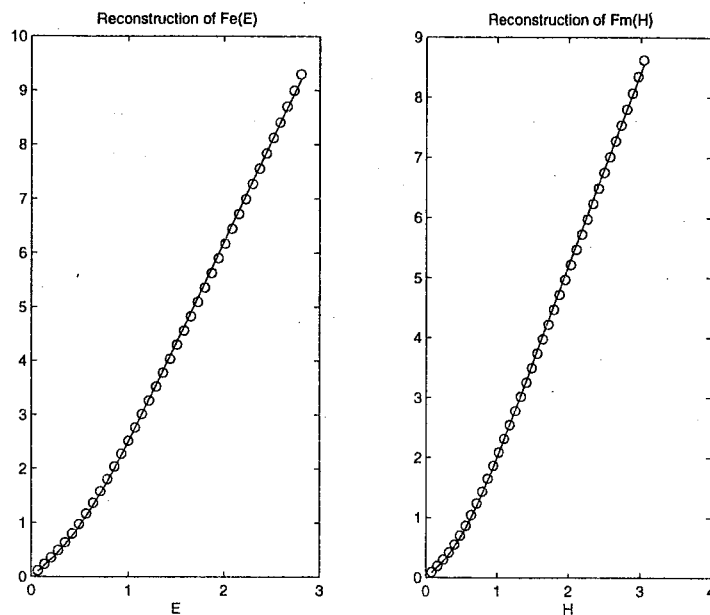


Figure 2: Reconstructed functions, from external fields. The circles are the reconstructed values, and the lines are the true functions.

determine the functions

$$e(h) = g_e^{-1}(g_m(h))$$

$$c(e, h) = \frac{c_0}{g'_e(e)g'_m(h)}$$

The derivative of e with respect to h is $\frac{de}{dh} = \frac{g'_m(h)}{g'_e(e)}$, corresponding to the wave impedance. We can thus find $g'_e(e)^2 = F'_e(e)$ and $g'_m(h)^2 = F'_m(h)$ by combining these relations:

$$F'_e(e) = \frac{\frac{dh}{de}}{c(e, h(e))} \Rightarrow F_e(e) = \int_0^{h(e)} \frac{dh'}{c(e(h'), h')}$$

$$F'_m(h) = \frac{\frac{de}{dh}}{c(e(h), h)} \Rightarrow F_m(h) = \int_0^{e(h)} \frac{de'}{c(e'(h), h')}$$

The inverse problem is thus seen to be well posed, and an explicit numerical illustration showing the performance of the inverse algorithm is depicted in Figure 2.

REFERENCES

- [1] Kristensson, G. and Wall, D. J. N., "Direct and inverse scattering for transient electromagnetic waves in nonlinear media," *Inverse Problems*, vol. 14. 1998. pp. 113-137.