



# LUND UNIVERSITY

## Empirical Equations for Intrinsic and Effective Evaporative Resistances of Multi-layer Clothing Ensembles

Wang, Faming; Ji, E.; Zhou, X.; Wang, S.

*Published in:*  
Industria Textila

2010

[Link to publication](#)

*Citation for published version (APA):*

Wang, F., Ji, E., Zhou, X., & Wang, S. (2010). Empirical Equations for Intrinsic and Effective Evaporative Resistances of Multi-layer Clothing Ensembles. *Industria Textila*, 61(4), 176-180.

*Total number of authors:*

4

### General rights

Unless other specific re-use rights are stated the following general rights apply:  
Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

# Empirical equations for intrinsic and effective evaporative resistance of multi-layer clothing ensembles

FAMING WANG  
ERLI JI

XIAOHONG ZHOU  
SHANYUAN WANG

## REZUMAT – ABSTRACT – INHALTSANGABE

### Ecuatii empirice de determinare a rezistențelor intrinseci și efective la evaporare ale ansamblurilor vestimentare multistratificate

Pentru a determina valorile rezistenței intrinseci și ale celei efective la evaporare, atât la îmbrăcăminte individuală, cât și la ansamblurile vestimentare multistratificate destinate sezonului rece, s-a folosit manechinul termic Walter. Pornind de la testările efectuate asupra îmbrăcămintii individuale, au fost dezvoltate două ecuații empirice de estimare a acestor rezistențe, ele fiind utile atât producătorilor de îmbrăcăminte – pentru o estimare globală a rezistenței intrinseci/efective la evaporare, cât și utilizatorilor – pentru asigurarea unui confort termic optim.

Cuvinte-cheie: rezistență la evaporare, manechin termic, ecuație empirică, ansambluri vestimentare

### Empirical equations for intrinsic and effective evaporative resistances of multi-layer clothing ensembles

To determine the intrinsic and effective clothing evaporative resistances, both in the individual clothing, and in the multi-layer clothing ensembles meant for the winter season, a fabric sweating thermal manikin Walter was used. Based on the tests performed on the individual garments, two empirical equations were developed for the estimation of these resistances, useful either to clothing manufacturers – to roughly estimate the clothing intrinsic/effective evaporative resistance, or to consumers – to assure them an optimal thermal comfort.

Key-words: evaporative resistance, thermal manikin, empirical equation, clothing ensembles

### Empirische Gleichungen für die Bestimmung des eigentlichen und effektiven Verdunstwiderstandes der Multi-Schicht Bekleidungsensembles

Um die Werte des eigentlichen und effektiven Verdunstwiderstandes zu bestimmen, sowohl bei der individuellen Bekleidung, als auch bei der Multi-Schicht Bekleidung für den kalten Saison, wurde das thermische Mannequin Walter verwendet. Aufgrund der Tests, durchgeführt auf individueller Bekleidung, wurden zwei empirische Gleichungen für die Schätzung dieser Widerstände entwickelt, indem sie sowohl den Bekleidungsproduzenten – für eine globale Schätzung des eigentlichen/effektiven Verdunstwiderstandes als auch den Endverbrauchern – für die Sicherung eines optimalen thermischen Komfortes, wertvoll sind.

Schlusswörter: Verdunstwiderstand, thermisches Mannequin, empirische Gleichung, Bekleidungsensembles

Clothing total thermal and evaporative resistances are the two most important parameters for thermal comfort and human heat balance models. Total clothing evaporative resistance  $R_e$  is the combined resistance provided by clothing  $R_{ecl}$  (clothing intrinsic evaporative resistance) and the surrounding layer of air  $R_{ea}$  (evaporative resistance of the air layer). This relationship can be mathematically described as:

$$R_e = R_{ecl} + R_{ea} \quad (1)$$

Values for  $R_e$  and  $R_{ea}$  can be measured from variations of the standard tests for clothing thermal resistance by using either a sweating guarded hot plate or a sweating thermal manikin. The intrinsic clothing evaporative resistance  $R_{ecl}$  and effective clothing evaporative resistance  $R_{ecl}$  are calculated from the following equations:

$$R_{ecl} = R_e - \frac{R_{ea}}{f_{cl}} \quad (2)$$

$$R_{ecl} = R_e + R_{ea} \quad (3)$$

where:

$f_{cl}$  is the clothing area factor, the ratio outer surface area of a clothed person and a nude person.

This can be measured by photographic or 3D whole body scanning methods. The surface area increased resulted from wearing clothing depends on the thickness of the clothing, which is relate to the clothing thermal resistance. The clothing area factor may also be estimated from the equation proposed by McCullough and Jones in 1984:

$$f_{cl} = 1 + 0.31I_{cl} \quad (4)$$

where:

$I_{cl}$  is the clothing intrinsic thermal resistance, clo.

Although ISO 9920 provides a database on the clothing area factor and intrinsic clothing thermal resistances of many western, Gulf region and Korean clothing ensembles, it is still a challenge to accurately measure the clothing area factor. Moreover, the empirical equation regarding clothing evaporative resistance values of multi-layer clothing ensembles based on individual garments hasn't reported yet. It is necessary to develop empirical equations to estimate the intrinsic and effective evaporative resistances of clothing ensembles by using the summation of individual garment. Additionally, the empirical equations are expected to be used for clothing manufacture companies and consumers for rough estimations. In this paper, we used a fabric sweating thermal manikin Walter to investigate the relationship between clothing ensemble's evaporative resistances (intrinsic and effective evaporative resistances) and the summation of the evaporative resistance of individual garments. Two empirical equations for estimation of clothing effective and intrinsic evaporative resistances were also developed.

## METHODS

### Clothing ensembles tested

Two kinds of knitted underwear ( $U_1$  and  $U_2$ ), three different middle-layer garments ( $M_1$ ,  $M_2$  and  $M_3$ ), a nylon/cotton Gore-Tex jacket ( $O$ ) and a pair of long trousers ( $T$ ) were used in this study. With these sets of clothing, nineteen different clothing combinations were selected

Table 1

Sample code	Component	Blend ratio, %	Weight, g	Descriptions
$U_1$	Polyester/spandex	93/7	112	Coolmax fabric
$U_2$	Cotton	100	103	Plain weave fabric, knit
$M_1$	Fabric: Nylon taffeta (70D x 70D) Filling: white duckling down/PET	90/10	343	Average weight: 0.839 mg/block White duck down length of a fibril: 5–30 mm Average diameter of fibrils: 21.0 $\mu\text{m}$
$M_2$	Fabric: Nylon taffeta (70D x 70D) Filling: polyester 100%	100	367	PET wedding
$M_3$	Fabric: Nylon taffeta (70D x 70D) Filling: polyester 100%	100	354	High insulating porous
$O$	Nylon/cotton	67/33	802	Plain weave fabric laminated with Gore-tex membrane, windproof jacket
$T$	Nylon	100	416	Moisture management fabric

at random for the tests. The details of all clothing ensembles are listed in table 1.

#### Thermal manikin

A fabric sweating thermal manikin Walter (fig. 1) was used to test the thermal and evaporative resistances of these garments. With this manikin, the total thermal resistance can be measured and calculated by using the following equations:

$$R_t = \frac{A \cdot (t_s - t_a)}{H_d} \quad (5)$$

$$H = H_d + H_e \quad (6)$$

$$H_e = E \cdot Q \quad (7)$$

where:

$R_t$  is the total thermal resistance of a garment,  $\text{m}^2 \cdot \text{°C}/\text{W}$ ;

$A$  – the body surface area,  $\text{m}^2$ ;

$t_s, t_a$  – the skin and ambient temperature respectively,  $\text{°C}$ ;

$H, H_d, H_e$  – the total, dry and evaporative heat loss,  $\text{W}$ ;

$E$  – the latent heat of evaporation of water at the skin temperature,  $\text{W} \cdot \text{h}/\text{g}$ ;

$Q$  – the sweating rate,  $\text{g}/\text{h}$ .

The total evaporative resistance of a garment can be calculated by:

$$R_e = \frac{A \cdot (p_s - p_a)}{H_e} = \frac{A \cdot (p_{sf} \cdot RH_s - p_{ef} \cdot RH_a)}{E \cdot Q} \quad (8)$$

where:

$R_e$  is the evaporative resistance,  $\text{Pa} \cdot \text{m}^2/\text{W}$ ;

$p_s, p_a$  – the water vapor pressure at the skin and the ambient temperature,  $\text{Pa}$ ;

$p_{sf}, p_{af}$  – the saturated water vapor pressure at the skin temperature and ambient temperature,  $\text{Pa}$ ;

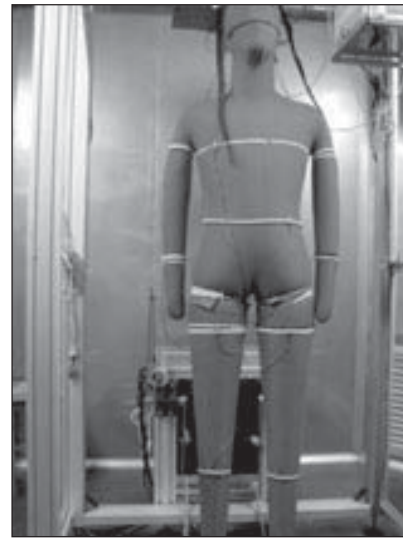


Fig. 1. The sweating fabric thermal manikin Walter

$RH_s, RH_a$  – relative humidity at the skin surface and the ambient respectively, %.

#### Test conditions

The core temperature of thermal manikin Walter was controlled at  $37\text{°C}$ . The area of the climatic chamber is  $4.0 \cdot 2.5 \cdot 2.1 \text{ m}$  and all tests were conducted at an ambient temperature of  $8 \pm 0.5\text{°C}$ , relative humidity of  $50 \pm 5\%$  and an air velocity of  $0.3 \pm 0.1 \text{ m/s}$ . Two Pt-100 RTD stainless steel temperature sensors, two Honeywell humidity sensors (HIH-3610) and an air velocity sensor (Testo 435, Germany) were used in the climatic chamber. Fifteen RTD temperature sensors were attached using a flat elastic webbing belt at different body parts (head, chest, back, tummy, hip, right upper arm, tight lower arm, left upper arm, left lower arm, right anterior thigh, right posterior thigh, left anterior thigh, left posterior thigh, right shin, left shin) of the manikin surface skin to measure the skin surface temperatures. An average temperature value of these 15 points was used as the mean skin surface temperature. All clothing ensembles were put inside the climatic chamber where the conditioned air temperature  $20\text{°C}$  and  $50\%$  RH for 24 hours before the measurement to stabilize. Each of the tests at one condition was repeated three times and the mean values were used for the final analysis. The recordings were considered good and correct if the coefficient of variance of all values measured for each clothing ensemble stayed below  $10\%$ . Finally, all the tests were strictly conducted according to ISO 15831, clothing physiological effects-measurement of thermal insulation by means of a thermal manikin, and ASTM F 2370, standard test method for measuring the evaporative resistance of clothing using a sweating manikin.

#### RESULTS AND DISCUSSION

A computer automatically records the manikin skin surface temperature –  $T_s$ , the ambient temperature –  $T_a$ , ambient relative humidity –  $He$ , total heat loss value –  $E$ , and the sweating rate –  $Q$ . The thermal resistance –  $R_t$  and evaporative resistance –  $R_e$  of the clothing

Clothing combinations	$T_{\text{e}}^{\circ}\text{C}$	$T_{\text{c}}^{\circ}\text{C}$	$H_{\text{e}}\%$	$E_{\text{e}}$ W	$Q_{\text{e}}$ g/h	$R_{\text{e}}$ $^{\circ}\text{C} \cdot \text{m}^2/\text{W}$	$R_{\text{e}}$ $\text{Pa} \cdot \text{m}^2/\text{W}$
T	31.5	8.4	55	601	422	0.135	16.6
$U_1T$	32.9	8.5	55	456	326	0.190	27.3
$U_2T$	32.8	8.1	55	490	364	0.189	23.5
$M_1T$	34.1	8.2	45	381	283	0.254	37.9
$M_2T$	33.1	8.1	45	422	324	0.229	29.0
$M_3T$	33.2	8.3	46	415	308	0.225	31.2
OT	34.0	8.5	53	383	282	0.246	36.2
$U_1M_1T$	34.2	7.5	46	361	268	0.278	40.4
$U_1M_2T$	34.6	8.2	48	341	250	0.288	36.3
$U_1M_3T$	34.2	7.8	46	364	272	0.274	39.7
$U_2M_1T$	34.1	8.3	49	333	251	0.282	42.1
$U_2M_2T$	33.9	8.5	54	377	289	0.257	34.3
$U_2M_3T$	34.2	8.2	47	387	281	0.255	37.9
$U_1M_1OT$	34.4	8.0	45	294	235	0.371	48.1
$U_1M_2OT$	34.6	8.2	45	327	258	0.335	43.6
$U_1M_3OT$	34.9	8.4	45	308	236	0.334	49.9
$U_2M_1OT$	34.2	8.2	46	292	229	0.354	48.5
$U_2M_2OT$	34.5	7.9	45	318	254	0.344	44.0
$U_2M_3OT$	34.9	7.9	47	307	229	0.330	51.5


ensembles can also be calculated by the LabVIEW program (National Instrument, USA). All measured and calculated parameters are listed in table 2. Since the same pair of trousers were used for all tests, the thermal and evaporative resistances when the manikin only wearing the trousers could be deemed as the basic thermal and evaporative resistances of the air layer. As a result, the thermal and evaporative resistances of the air layer are  $0.135^{\circ}\text{C} \cdot \text{m}^2/\text{W}$  and  $16.63 \text{ Pa} \cdot \text{m}^2/\text{W}$ .

The calculated intrinsic, effective clothing evaporative resistances and clothing area factor of all 18 possible clothing combinations (exclude the clothing combination T) are listed in table 3. It can be clearly seen that the effective evaporative resistance of a clothing combination is larger than its intrinsic evaporative resistance. Hence it is demonstrated that the clothing area factor is larger than 1 due to the thickness of the added clothing. The calculated clothing area factor of all 18


clothing ensembles by equation (4) ranges from 1.139 to 1.560.

The accumulated effective evaporative resistance  $\Sigma R_{cle}$  of the clothing ensemble can be achieved by adding up the effective evaporative resistance of individual garment. Similarly, the accumulated intrinsic evaporative resistance  $\Sigma R_{cl}$  of individual clothing in a multi-layer clothing ensemble can be also easily acquired. According to the data of effective and intrinsic evaporative resistances for 18 clothing ensembles presented in table 3, the relation between accumulated intrinsic (or effective) evaporative resistances and total intrinsic (or effective) evaporative resistance of multi-layer garments could be developed using origin software – OriginLab Corporation, Version 8.0, USA (fig. 2). The empirical equations are listed as follows:

$$R_{ecl} = 0.60 \Sigma R_{ecl} + 5.89 \quad (9)$$

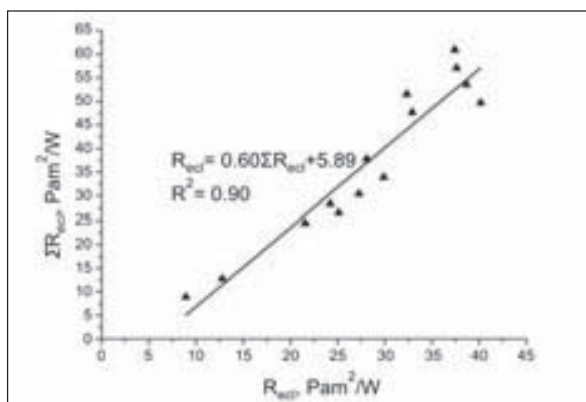

a

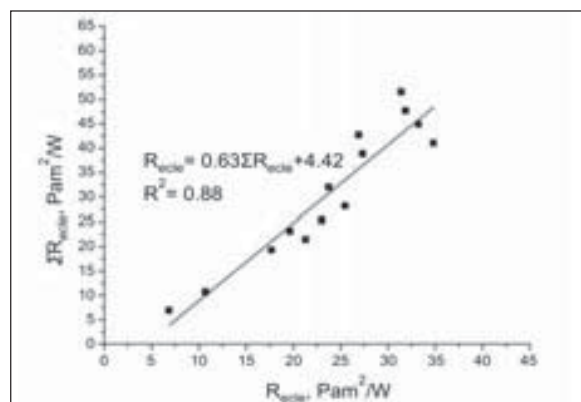

b

Fig. 2. Relations between accumulated clothing effective/intrinsic evaporative resistance and clothing effective/intrinsic evaporative resistance: **a** – intrinsic evaporative resistance of clothing ensembles and sum of intrinsic evaporative resistance of individual garment; **b** – effective evaporative resistance of clothing ensembles and sum of effective evaporative resistance of individual garment

Table 3

Clothing combinations	$R_{cl}$ Pa · m <sup>2</sup> /W	$R_{cle}$ Pa · m <sup>2</sup> /W	$f_{cl}$
$U_1$	10.7	12.8	1.14
$U_2$	6.9	8.9	1.14
$M_1$	21.2	25.0	1.30
$M_2$	12.4	15.6	1.24
$M_3$	14.6	17.6	1.23
$O_1$	19.6	23.2	1.28
$U_1M_1$	23.8	28.1	1.35
$U_1M_2$	19.7	24.2	1.37
$U_1M_3$	23.0	27.3	1.34
$U_2M_1$	25.5	29.9	1.36
$U_2M_2$	17.7	21.6	1.30
$U_2M_3$	21.3	25.1	1.30
$U_1M_1O$	31.4	37.4	1.56
$U_1M_2O$	26.9	32.3	1.48
$U_1M_3O$	33.3	38.6	1.48
$U_2M_1O$	31.9	37.6	1.52
$U_2M_2O$	27.3	32.9	1.50
$U_2M_3O$	34.8	40.2	1.47

$$R_{ecl} = 0.60 \sum R_{ecl} + 4.42 \quad (10)$$

Or, with slightly reduce the accuracy, we can get the following two empirical equations:

$$R_{ecl} = 0.60 \sum R_{ecl} \quad (11)$$

$$R_{ecl} = 0.63 \sum R_{ecl} \quad (12)$$

It can be deduced from figure 2a that there is a good linear relationship between the accumulated clothing intrinsic evaporative resistance  $\sum R_{ecl}$  and the intrinsic evaporative resistance  $R_{ecl}$  of the clothing ensemble. Hence, we can use accumulated clothing evaporative resistance of individual garment to predict the total evaporative resistance of a multi-layer clothing ensemble. Since thermal manikin tests are costly, using such an empirical equation could rapidly estimate clothing total evaporative resistance by using the value of the

individual garment. Similarly, the effective clothing evaporative resistance of a specific multi-layer clothing ensemble can also be predicted using the equation presented in figure 2b. Furthermore, we can use clothing effective evaporative resistance to replace clothing intrinsic evaporative resistance for rough estimation due to the fact that the measurement of the clothing area factor is difficult and time-consuming.

In this paper, we only investigated the two static evaporative resistances (intrinsic and effective) of winter garments due to the fact that heat pumping effect resulted from walking and air speeds is small for thick clothing ensembles. It would be more useful to consider effects of both the air velocity and walking speed on the resultant evaporative resistance for both thick and thin clothing ensembles. Further studies will be focused on the effects of walking and air velocity on the resultant evaporative resistance of various clothing, especially one-layer light summer series clothing.

## CONCLUSIONS

In this paper, a fabric sweating thermal manikin Walter was used to develop the relation between total intrinsic evaporative resistance of a multi-layer clothing ensemble and the accumulated intrinsic evaporative resistance of the individual garment. Two empirical equations on ensemble evaporative resistance based on summation of individual garments were also developed. Some of the novel findings in this study are summarized as follows:

- The two empirical equations for clothing intrinsic and effective evaporative resistances are:

$$R_{ecl} = 0.60 \sum R_{ecl} + 5.89$$

$$R_{ecl} = 0.60 \sum R_{ecl} + 4.42$$

- It is useful to use accumulated intrinsic evaporative resistance of individual garment to predict the total intrinsic evaporative resistance of a multi-layer clothing ensemble. On the other hand, the effective evaporative resistance could be also used to estimate the clothing intrinsic evaporative resistance for a rough estimation due to the difficulty of measuring clothing area factor.

## BIBLIOGRAPHY

- [1] Wang, F., Gao, C., Kuklane, K., Holmér, I. *A study on evaporative resistances of two skins designed for thermal manikin Tore under different environmental conditions*. In: Journal of Bioengineering and Informatics, 2009, vol.1, issue 4, p. 301
- [2] Wang, F., Shanyuan, W. *Characterization on pore size of honeycomb-patterned micro-porous PET fibers using image processing techniques*. In: Industria Textilă, 2010, vol. 61, issue 2, p. 66
- [3] Caravello, V. *Total evaporative resistance of selected clothing ensembles*. In: Doctoral dissertation, University of South Florida, 2004
- [4] Mitu, S., Hâncu, S. P., Matenciuc, C. C., Bărlădeanu, E. *Limitele indicatorilor sanogenetici pentru ansambluri vestimentare cu noi particularități structurale*. In: Industria Textilă, 2008, vol. 59, issue 1, p.14
- [5] Parsons, K. C. *Human Thermal Environments – The effects of hot, moderate and cold environments on human health, comfort and performance*. 2nd edition, UK: CRC Press, 2003
- [6] Basal, G., Mecit, D., Duran, D., Ilgaz, S. *Comfort properties of double layered knitted and woven fabrics*. In: Industria Textilă, 2009, vol. 60, issue 3, p. 299
- [7] Zampetakis, A., Katsaros, G. *Wear comfort and protective properties of fabrics*. In: Industria Textilă, 2008, vol. 59, issue 3, p. 118
- [8] Zampetakis, A., Katsaros, G., Dumitrescu, I. *Optimizing the wear comfort parameters for summer clothing*. In: Industria Textilă, 2008, vol. 59, issue 5, p. 213
- [9] Peng, C., Wang, F. *The clothing layers' influence on its warming performance*. In: Industria Textilă, 2009, vol. 60, issue 3, p. 115
- [10] Olesen, B. W., Sliwinska, E., Madsen, T. L., Fanger, P. O. *Effect of body posture and activity on the thermal insulation of clothing: measurement by a movable thermal manikin*. In: ASHRAE Transaction, 1982, vol. 88, issue 2, p. 791
- [11] Oliveira, A. V. M., Gaspar, A. D., Quintela, D. A. *Thermal insulation of cold protective clothing: static and dynamic measurements with a movable thermal manikin*. XI Proceedings of the 11th International Conference on Environmental Ergonomics, Holmér, I., Kuklane, K. and Gao, C. (eds.), Ystad, Sweden, May 22–26, 2005, p. 66

- [12] McCullough, E. A., Jones, B. W. *A comprehensive database for estimating clothing insulation*. In: Institute for Environmental Research IER technical report 84-01, Kansas State University, 1984
- [13] EN ISO 9920. *Ergonomics of the thermal environment-estimation of thermal insulation and water vapor resistance of a clothing ensemble*. European Committee for Standardization, Brussels, Belgium, 2007
- [14] Huang, J. *Thermal parameters for assessing thermal properties of clothing*. In: Journal of Thermal Biology, 2006, vol. 31, issue 6, p. 461
- [15] McCullough, E. A., Huang, J., Deaton, S. *Methods of measuring the clothing area factor*. In: Proceedings of the 11<sup>th</sup> International Conference on Environmental Ergonomics, Holmér, I., Kuklane, K. and Gao, C. (eds.), Ystad, Sweden, May 22-26, 2005, p. 433
- [16] Fan, J., Qian, X. *New functions and applications of walter, the sweating fabric manikin*. In: European Journal Applied Physiology, 2004, vol. 92, issue 6, p. 641
- [17] Wang, F. *Comparisons on thermal and evaporative resistances of kapok coats and traditional dow coats*. In: Fibers & Textiles in Eastern Europe, 2010, vol. 18, issue 1, p. 75
- [18] ISO 15831. *Clothing – Physiological effects – Measurement of thermal insulation by means of a thermal manikin*. International Organization for Standardization, Geneva, Switzerland, 2004
- [19] ASTM F 2370. *Standard test method for measuring the evaporative resistance of clothing using a sweating manikin*. American Society for Testing and Materials, Pennsylvania, USA, 2005
- [20] Williams, J. T. *Textiles for cold weather apparel*. Cambridge, UK: Woodhead Publishing Limited and CRC Press, 2009

#### Authors/Autori:

Chief of work dr. eng./Şef de lucrări dr. ing. FAMING WANG  
Thermal Environment Laboratory, EAT  
Department of Design Sciences – Lund University  
Lund 221 00, Sweden  
e-mail: faming.wang@design.lth.se

Conf. dr. eng./Conf. dr. ing. SHANYUAN WANG  
Conf. dr. eng./Conf. dr. ing. ERLI JI  
College of Textiles, Donghua University  
Songjiang District  
2999 North Remin Road  
Shanghai 200051, China

Conf. dr. eng./Conf. dr. ing. XIAOHONG ZHOU  
College of Materials & Textiles  
Zhejiang Sci-Tech University  
Hangzhou 310018, China

## CRONICĂ

### PROPOSTE 2010

Cea de-a VIII-a ediție a celui mai important târg comercial internațional de materiale pentru amenajări interioare, perdele și draperii – **PROPOSTE**, s-a desfășurat în perioada 5–7 mai 2010, la Villa Erba/ Cernobbio.

Din cei 103 expozanți europeni, 53 au fost din Italia. Numărul total de vizitatori profesioniști a scăzut cu 2,5%, față de anul 2009. Totuși s-a înregistrat un număr de 6 553 de vizitatori – dintre care 2 698 (41%) italieni și 3 855 din alte 70 de țări – la care s-au adăugat 442 de jurnaliști și invitați.

În topul țărilor cu prezența cea mai mare s-a aflat Germania, Marea Britanie, Franța, Statele Unite ale Americii și Rusia.

Interesant este faptul că s-a înregistrat o creștere a participării din partea Americii (+29%), Rusiei (+11%) și Arabiei Saudite (+46%), în timp ce, așa cum era de

așteptat, numărul de vizitatori din Grecia și Portugalia a scăzut.

Cele 11 oficii înființate pentru presă au găzduit 20 de companii editoriale, ce au reprezentat un total de 56 de publicații.

Contrar unor așteptări pesimiste, bazate pe efectele crizei financiare pe care o traversăm, rezultatele excelente ale **PROPOSTE 2010**, au demonstrat că cererea de produse inovatoare, de înaltă calitate, continuă să fie ridicată pe piețele internaționale.

Pe durata celor trei zile ale evenimentului, un colectiv de jurnaliști și stilști au făcut o evaluare a colecțiilor expuse la târg, dintr-o perspectivă mondială „premiere”, iar tendințele în domeniul textilelor destinate amenajărilor interioare vor fi prezentate, în curând, într-un număr special „*Made in Europe Trends at Proposte 2010*” publicat pe website la adresa: [www.propostefair.it](http://www.propostefair.it).

*Informații de presă. Proposte, Milano, 11 mai 2010*

