



LUND UNIVERSITY

Decoding of woven convolutional codes and simulation results

Jordan, Ralph; Schnug, Walter; Bossert, Martin; Höst, Stefan; Johannesson, Rolf

Published in:
[Host publication title missing]

DOI:
[10.1109/ISIT.2000.866386](https://doi.org/10.1109/ISIT.2000.866386)

2000

[Link to publication](#)

Citation for published version (APA):

Jordan, R., Schnug, W., Bossert, M., Höst, S., & Johannesson, R. (2000). Decoding of woven convolutional codes and simulation results. In *[Host publication title missing]* (pp. 96) <https://doi.org/10.1109/ISIT.2000.866386>

Total number of authors:
5

General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117
221 00 Lund
+46 46-222 00 00

Decoding of Woven Convolutional Codes and Simulation Results

R. Jordan, W. Schnug, and
M. Bossert
Dep. of Information Technology
University of Ulm
Albert-Einstein-Allee 43
D-89081 Ulm, Germany
e-mail: {ralph.jordan,
walter.schnug, boss}
@e-technik.uni-ulm.de

S. Höst and R. Johannesson
Dep. of Information Technology,
Information Theory Group
Lund University
P.O. Box 118
SE-221 00 Lund, Sweden
e-mail: {stefan.host, rolf}
@it.lth.se

V. V. Zyablov
Inst. for Problems of Information
Transmission of the Russian
Academy of Science
B. Karetnyi per., 19, GSP-4
Moscow, 101447 Russia
e-mail: zyablov@iitp.ru

Abstract — An iterative decoding scheme for woven convolutional codes is presented. It is called pipeline decoding and operates in a window sliding over the received sequence. This exploits the nature of convolutional codes as sequences and suits the concept of convolutional encoding and decoding as a continuous process. The pipeline decoder is analyzed in terms of decoding delay and decoding complexity.

Additional interleaving for woven convolutional constructions is introduced by employing a convolutional scrambler. It is shown that some types of interleaving preserve the lower bound on the free distance of the original woven construction.

Simulation results for woven convolutional codes are presented.

I. INTRODUCTION

In [1, 2] three related woven constructions were introduced, viz.,

- woven convolutional codes with *outer* warp $(l_o, 1)$,
- woven convolutional codes with *inner* warp $(1, l_i)$,
- the *twill* (l_o, l_i) ,

where the (l_o, l_i) denotes the number of encoders in the outer and inner warps, respectively. The encoder for a woven convolutional code is represented by a serial concatenation of two warps both consisting of a set of parallel convolutional encoders, see Fig. 1. If l_o and l_i are relatively prime and large enough, the free distance of the woven convolutional code satisfies

$$d_{\text{free}}^w \geq d_{\text{free}}^o d_{\text{free}}^i, \quad (1)$$

where d_{free}^o and d_{free}^i denote the free distances of the outer and inner component code, respectively.

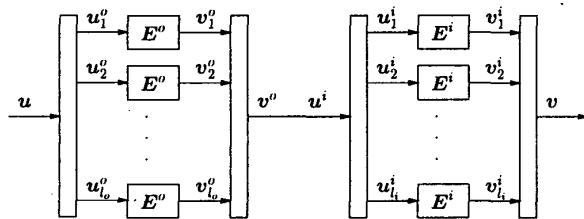


Fig. 1: Encoder for the twill.

II. ITERATIVE DECODING

In contrast to the well known iterative decoding scheme of serially concatenated truncated convolutional codes [3, 4], the presented decoding scheme, called pipeline decoding, operates with a sliding window technique over the received sequence. For the symbol-by-symbol *a posteriori* decoding of the inner and outer component codes a sliding window version of the BCJR algorithm [5] is employed. The window is separated into one decision window of size w_d and one delay window of size w_b . Based on the sizes of these windows we analyze the decoding delay and the decoding complexity of the W-BCJR, as well as that of the pipeline decoder. Simulation results for the pipeline decoder are presented.

III. ADDITIONAL INTERLEAVING

Additional interleaving can significantly improve the bit error performance at low signal to noise ratios. To preserve the convolutional code structure of the overall code, we use convolutional scramblers for interleaving.

It is shown, that the woven construction can apply additional random interleaving without violating the lower bound on the free distance of the original construction (1). Furthermore, additional interleaving can be applied to reduce the number of encoders, l_o and l_i , while the lower bound (1) still holds.

IV. SIMULATION RESULTS

Simulation results show that terminated woven convolutional codes are attractive alternatives to both parallel and serial concatenation of convolutional codes, e.g., Turbo codes.

REFERENCES

- [1] S. Höst, "On Woven Convolutional Codes," Ph.D. thesis, Lund University, Sweden, 1999, ISBN: 91-7167-016-5.
- [2] S. Höst, R. Johannesson, and V. Zyablov, "Woven Convolutional Codes I: Encoder Properties," *submitted to IEEE Trans. on Inform. Theory*, Jan., 2000.
- [3] J. Hagenauer, E. Offer, and L. Papke, "Iterative Decoding of Binary Block Codes and Convolutional Codes," *IEEE Trans. on Inform. Theory*, vol. IT-45, pp. 429–445, 1996.
- [4] S. Benedetto and G. Montorsi, "Serial Concatenation of Interleaved Codes: Performance Analysis, Design, and Iterative Decoding," *IEEE Trans. on Inform. Theory*, vol. IT-44, pp. 909–926, 1998.
- [5] L.R. Bahl, J. Cocke, F. Jelinek, and J. Raviv, "Optimal Decoding of Linear Codes for Minimum Symbol Error Rate," *IEEE Trans. on Inform. Theory*, vol. IT-20, pp. 284–287, 1974.
- [6] M. Bossert, S. Höst, R. Jordan, R. Johannesson, and V. Zyablov, "Woven Convolutional Codes II: Decoding Aspects," *In preparation*, 2000.