



# LUND UNIVERSITY

## Codes on Graphs, Trellises and Spatial Coupling: another look at self-concatenated convolutional codes

Lentmaier, Michael; Moloudi, Saeedeh; Graell i Amat, Alexandre

*Published in:*

2018 International Zurich Seminar on Information and Communication (IZS)

*DOI:*

[10.3929/ethz-b-000245084](https://doi.org/10.3929/ethz-b-000245084)

2018

*Document Version:*

Peer reviewed version (aka post-print)

[Link to publication](#)

*Citation for published version (APA):*

Lentmaier, M., Moloudi, S., & Graell i Amat, A. (2018). Codes on Graphs, Trellises and Spatial Coupling: another look at self-concatenated convolutional codes. In *2018 International Zurich Seminar on Information and Communication (IZS)* (pp. 45-45). ETH, Zürich. <https://doi.org/10.3929/ethz-b-000245084>

*Total number of authors:*

3

### General rights

Unless other specific re-use rights are stated the following general rights apply:

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

Read more about Creative commons licenses: <https://creativecommons.org/licenses/>

### Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LUND UNIVERSITY

PO Box 117  
221 00 Lund  
+46 46-222 00 00

# Codes on Graphs, Trellises and Spatial Coupling: another look at self-concatenated convolutional codes

Michael Lentmaier<sup>†</sup>, Saeedeh Moloudi<sup>†</sup>, and Alexandre Graell i Amat<sup>‡</sup>

<sup>†</sup>Department of Electrical and Information Technology, Lund University, Lund, Sweden

<sup>‡</sup>Department of Electrical Engineering, Chalmers University of Technology, Gothenburg, Sweden

{michael.lentmaier, saeedeh.moloudi}@eit.lth.se, alexandre.graell@chalmers.se

**Abstract**—We present recent results on spatially coupled turbo-like codes and point out a connection to the self-concatenated trellis construction proposed by Loeliger in 1997 [1].

## I. CODES ON GRAPHS WITH TRELLIS CONSTRAINTS

We use the term turbo-like codes for generalized LDPC codes with convolutional component codes. In the corresponding factor graphs, the factor nodes represent trellis constraints instead of single parity-check equations. To efficiently describe the structure of different ensembles, similarly to protographs, we use a compact graph representation, illustrated in Fig. 1.

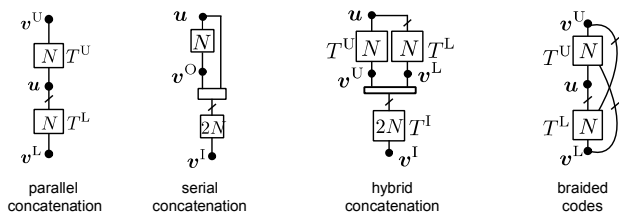


Fig. 1. A compact graph representation of turbo-like code ensembles [2].

## II. SPATIAL COUPLING AND THRESHOLD SATURATION

Spatially coupled (SC) turbo-like code ensembles can then be obtained from a sequence of compact graphs, analogously to SC-LDPC codes. The graphs are coupled by connecting the variable nodes at position  $t$  to factor nodes at positions  $t, \dots, t + m$ , where  $m$  denotes the coupling memory. For the BEC, it can be shown using exact density evolution (DE) recursions that with spatial coupling the decoding threshold of an iterative BP decoder can be improved to the threshold of an optimal MAP decoder (threshold saturation) [2] [3]. For the AWGN channel, where exact DE recursions are not available, the thresholds can be estimated with Monte Carlo methods or predicted from the BEC thresholds [4]. For the ensembles shown in Fig. 1, the predicted thresholds are given in Table I.

TABLE I  
PREDICTED AWGN CHANNEL THRESHOLDS ( $E_b/N_0$  [dB]) FOR DIFFERENT TURBO-LIKE CODE ENSEMBLES OF RATE  $R = 1/3$ .

	BP	MAP	$BP_{SC}^{m=1}$	$BP_{SC}^{m=3}$	$BP_{SC}^{m=5}$
Parallel	-0.1052	-0.3070	-0.3070	-0.3070	-0.3070
Serial	1.4023	-0.4740	-0.1196	-0.4673	-0.4740
Braided	1.2139	-0.4723	-0.4690	-0.4723	-0.4723
Hybrid	3.8846	-0.4941	0.2809	-0.4706	-0.4941

Observe that, while the classical turbo codes (parallel concatenation) have the best BP threshold, their MAP threshold is

actually the worst. Vice versa, hybrid concatenated and braided codes have poor BP thresholds without spatial coupling. On the other hand, hybrid codes have the best MAP threshold, and braided codes are best for small coupling memory  $m = 1$ .

## III. SELF-CONCATENATED CONVOLUTIONAL CODES

The idea of self-concatenated codes goes back to 1997 and has been proposed independently (at the same conference) by Loeliger [1] and by Divsalar / Pollara [5]. Compared to LDPC codes, a characteristic feature of turbo-like codes is that their factor graph contains a small number of long trellis constraints instead of a large number of short constraints. But what is the advantage of having more than one trellis? In [6] we have presented a unified self-concatenated ensemble, shown in Fig. 2, which contains all the ensembles in Fig. 1 as special cases. A novel element in this ensemble is the feedback of parity bits, which is required for representing the serial, hybrid, and braided ensembles. The various instances of the ensemble differ in the amount of feedback, puncturing and the structure of the permutations. Spatial coupling can be achieved by imposing a causality condition on the permutation matrices.

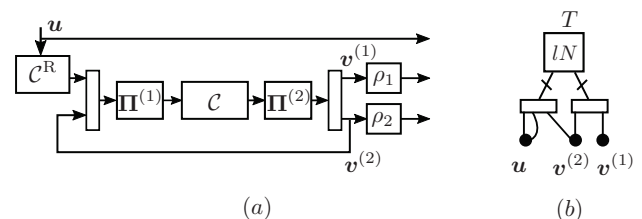


Fig. 2. A unified ensemble based on a single trellis (a) encoder block diagram (b) compact graph.

## REFERENCES

- [1] H. A. Loeliger, “New turbo-like codes,” in *Proc. IEEE Int. Symp. Inf. Theory (ISIT)*, Ulm, Germany, June 1997.
- [2] S. Moloudi, M. Lentmaier, and A. Graell i Amat, “Spatially coupled turbo-like codes,” *IEEE Trans. on Inf. Theory*, vol. 63, no. 10, Oct. 2017.
- [3] S. Moloudi, M. Lentmaier, and A. Graell i Amat, “Spatially coupled hybrid concatenated codes,” in *Proc. 11th Int. ITG Conf. on Systems, Communications and Coding (SCC)*, Hamburg, Germany, Feb. 2017.
- [4] M. U. Farooq, S. Moloudi, and M. Lentmaier, “Thresholds of braided convolutional codes on the AWGN channel,” submitted to *IEEE Int. Symp. Inf. Theory (ISIT)*, 2018.
- [5] D. Divsalar and F. Pollara, “Hybrid concatenated codes and iterative decoding,” in *Proc. IEEE Int. Symp. Inf. Theory (ISIT)*, Ulm, Germany, June 1997.
- [6] S. Moloudi, M. Lentmaier, and A. Graell i Amat, “A unified ensemble of concatenated convolutional codes,” in *Proc. IEEE Int. Symp. Inf. Theory (ISIT)*, Aachen, Germany, June 2017.